
LED Lamp GL5□□44 series

GL5□□44 series

ø5mm(T-1 3/4), Cylinder Type, Colorless Transparency LED Lamps for Backlight/Indicator


■ Outline Dimensions



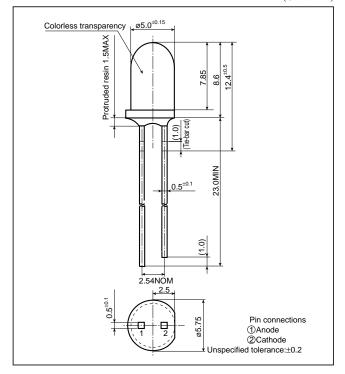

■ Radiation Diagram

(Ta=25°C)

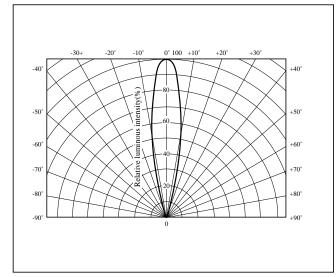

■ Absolute Maximum Ratings

(Ta=25°C)

Model No.	Radiation color		Power dissipation P (mW)	Forward current IF (mA)	Peak forward current IFM*1 (mA)	Derating (mA	_	Reverse voltage V _R (V)	Operating temperature Topr (°C)	Storage temperature T_{stg} (°C)	Soldering temperature T _{sol} *2 (°C)
GL5PR44	Red	GaP	23	10	50	0.13	0.67	5	-25 to +85	-25 to +100	260
GL5HD44	Red	GaAsP on GaP	84	30	50	0.40	0.67	5	-25 to +85	-25 to +100	260
GL5HS44	Sunset orange	GaAsP on GaP	84	30	50	0.40	0.67	5	-25 to +85	-25 to +100	260
GL5HY44	Yellow	GaAsP on GaP	84	30	50	0.40	0.67	5	-25 to +85	-25 to +100	260
GL5EG44	Yellow-green	GaP	84	30	50	0.40	0.67	5	-25 to +85	-25 to +100	260
GL5KG44	Green	GaP	84	30	50	0.40	0.67	5	-25 to +85	-25 to +100	260

^{*1} Duty ratio=1/10, Pulse width=0.1ms

■ Electro-optical Characteristics


(Ta=25°C)


	Model No.	Forward voltage V _F (V)		Peak emission wavelength		Luminous intensity		Spectrum radiation bandwidth		Reverse current		Terminal capacitance		Page for
Lens type				λ _p (nm) I _F	Iv(mcd)	IF	$\Delta\lambda(nm)$	IF	Ir(µA)	VR	C _t (pF)		characteristics	
		TYP	MAX	TYP	(mA)	TYP	(mA)	TYP	(mA)	MAX	(V)	TYP	(MHz)	diagrams
Colorless transparency	GL5PR44	1.9	2.3	695	5	15	5	100	5	10	4	55	1	\rightarrow
	GL5HD44	2.0	2.8	635	20	100	20	35	20	10	4	20	1	\rightarrow
	GL5HS44	2.0	2.8	610	20	100	20	35	20	10	4	15	1	\rightarrow
	GL5HY44	2.0	2.8	585	20	100	20	30	20	10	4	35	1	\rightarrow
	GL5EG44	2.1	2.8	565	20	160	20	30	20	10	4	35	1	\rightarrow
	GL5KG44	2.1	2.8	555	20	70	20	25	20	10	4	40	1	\rightarrow


(Notice) • In the absence of confirmation by device specification sheets, SHARP takes no responsibility for any defects that may occur in equipment using any SHARP devices shown in catalogs, data books, etc. Contact SHARP in order to obtain the latest device specification sheets before using any SHARP device.


^{*2 5}s or less(At the position of 1.6mm or more from the bottom face of resin package)


PR series



















HD series

















Note) Characteristics shown in diagrams are typical values. (not assurance value)


Notice) • In the absence of confirmation by device specification sheets, SHARP takes no responsibility for any defects that may occur in equipment using any SHARP devices shown in catalogs, data books, etc. Contact SHARP in order to obtain the latest device specification sheets before using any SHARP device.


HS series



















HY series

















Note) Characteristics shown in diagrams are typical values. (not assurance value)


Notice) • In the absence of confirmation by device specification sheets, SHARP takes no responsibility for any defects that may occur in equipment using any SHARP devices shown in catalogs, data books, etc. Contact SHARP in order to obtain the latest device specification sheets before using any SHARP device.


EG series



















KG series














Note) Characteristics shown in diagrams are typical values. (not assurance value)

(Notice) • In the absence of confirmation by device specification sheets, SHARP takes no responsibility for any defects that may occur in equipment using any SHARP devices shown in catalogs, data books, etc. Contact SHARP in order to obtain the latest device specification sheets before using any SHARP device.