

GL9401A

NPN SILICON PLANAR MEDIUM POWER HIGH GAIN TRANSISTOR



Description

The GL9401A is designed for general purpose switching and amplifier applications.

Features

- 5 Amps continuous current, up to 20Amps pulse current
- Low saturation voltages
- High Gain

Package Dimensions

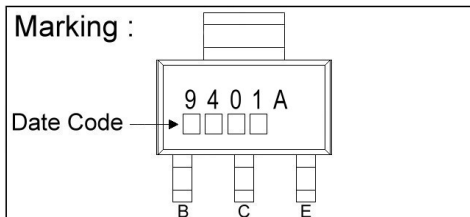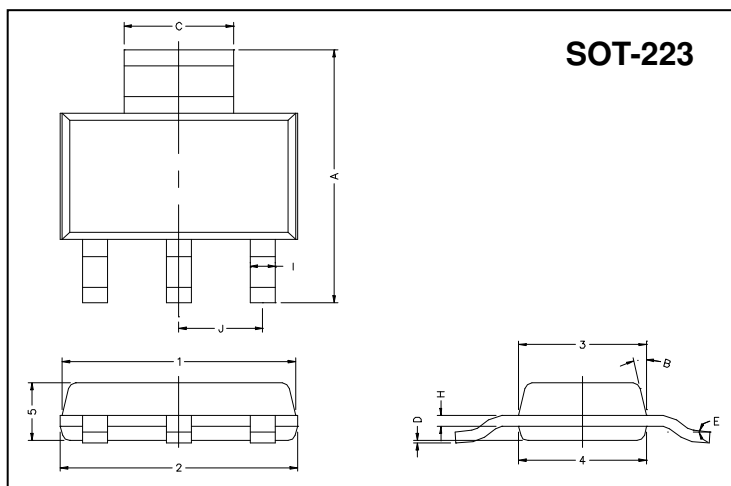

REF.	Millimeter		REF.	Millimeter	
	Min.	Max.		Min.	Max.
A	6.70	7.30	B	13°TYP.	
C	2.90	3.10	J	2.30 REF.	
D	0.02	0.10	1	6.30	6.70
E	0°	10°	2	6.30	6.70
I	0.60	0.80	3	3.30	3.70
H	0.25	0.35	4	3.30	3.70
			5	1.40	1.80

Absolute Maximum Ratings at Ta = 25°C

Parameter	Symbol	Ratings	Unit
Junction Temperature	Tj	+150	°C
Storage Temperature	Tstg	-55~+150	°C
Collector to Base Voltage	VCBO	80	V
Collector to Emitter Voltage	VCEO	30	V
Emitter to Base Voltage	VEBO	5	V
Collector Current (DC)	IC	5	A
Collector Current (Pulse)	ICM	20	A
Total Power Dissipation	PD	2.5	W

*The power which can be dissipated assuming the device is mounted in typical manner on a PCB with copper equal to 2 inches x 2 inches.


Electrical Characteristics (Ta = 25°C, unless otherwise stated)

Symbol	Min.	Typ.	Max.	Unit	Test Conditions
BVCBO	80	-	-	V	IC=100uA, IE=0
*BVCEs	80	-	-	V	IC=100uA
BVCEO	30	-	-	V	IC=10mA, IB=0
BVCEV	80	-	-	V	IC=10uA, VEB=1V
BVEBO	5	-	-	V	IE=100uA, IC=0
ICBO	-	-	10	nA	VCB=35V, IE=0
ICES	-	-	10	nA	VCEs=35V
IEBO	-	-	10	nA	VEB=4V, IC=0
*VCE(sat)1	-	-	60	mV	IC=500mA, IB=10mA
*VCE(sat)2	-	-	100	mV	IC=1A, IB=10mA
*VCE(sat)3	-	-	250	mV	IC=3A, IB=30mA
*VCE(sat)4	-	-	330	mV	IC=5A, IB=50mA
*VBE(sat)	-	-	1.05	V	IC=5A, IB=50mA
*VBE(on)	-	-	1.0	V	VCE=2V, IC=5A
*hFE1	280	-	-		VCE=2V, IC=10mA
*hFE2	300	-	-		VCE=2V, IC=0.5A
*hFE3	300	-	1200		VCE=2V, IC=1A
*hFE4	180	-	-		VCE=2V, IC=5A

*hFE5	40	-	-		VCE=2V, IC=20A
fT	-	180	-	MHz	VCE=10V, IC=50mA, f=100MHz
Cob	-	45	60	pF	VCB=10V, IE=0, f=1MHz
ton	-	125	-	ns	VCC=10V, IC=4A, IB1=IB2=40mA
toff	-	380	-		

*Measured under pulse condition. Pulse width $\leq 300\mu\text{s}$, Duty Cycle $\leq 2\%$

Characteristics Curve

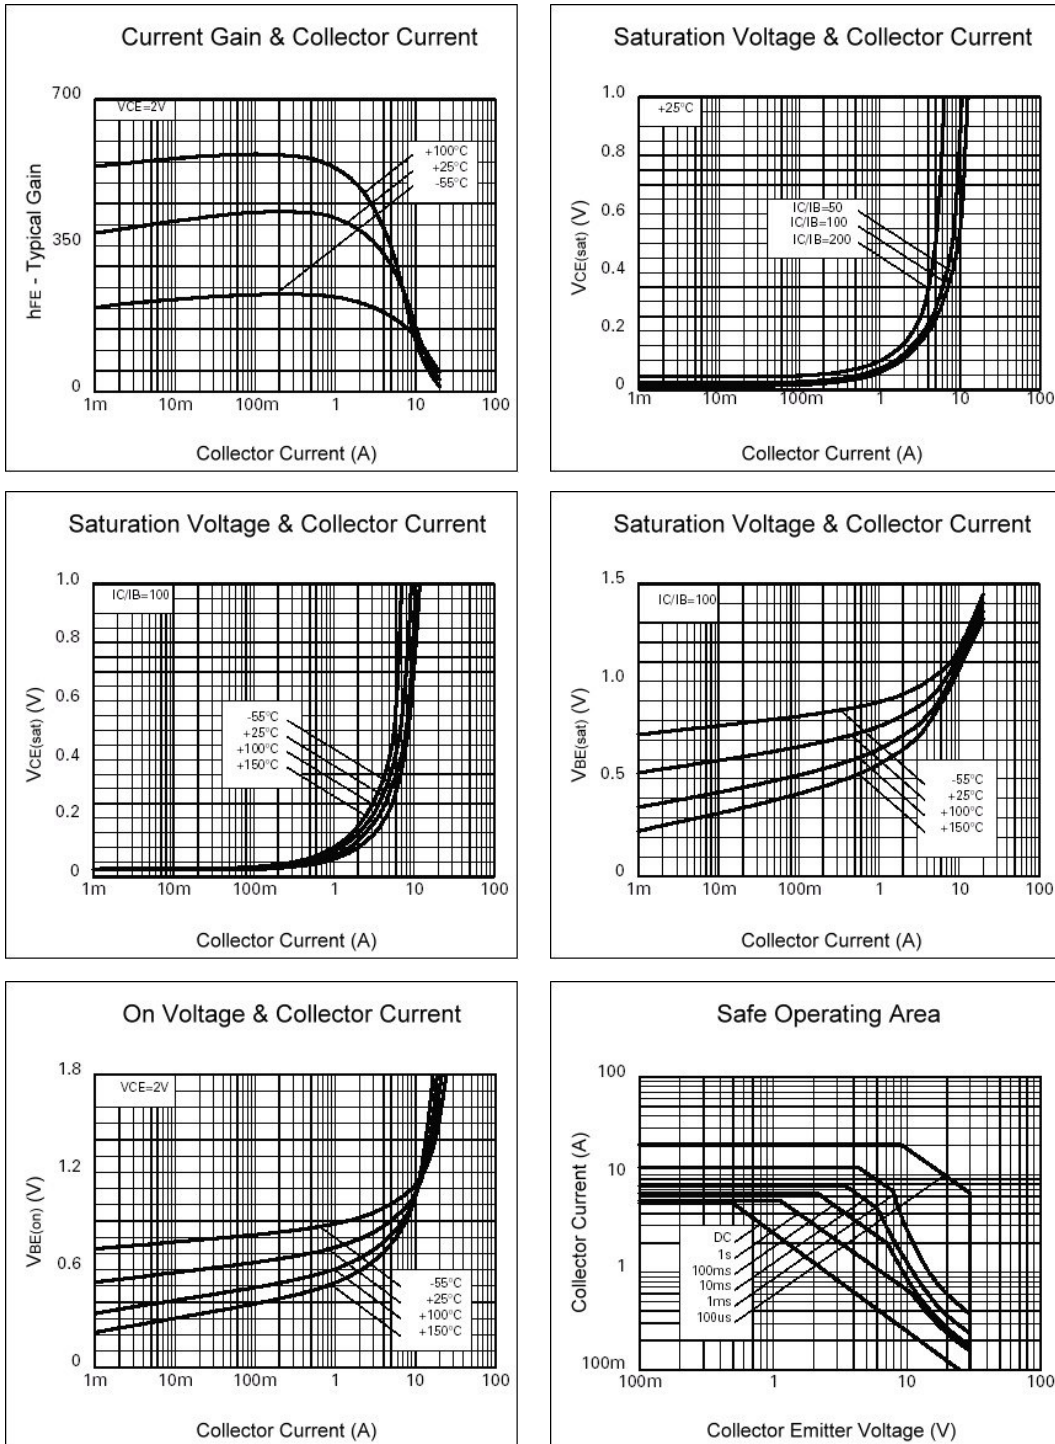

Important Notice:

- All rights are reserved. Reproduction in whole or in part is prohibited without the prior written approval of GTM.
- GTM reserves the right to make changes to its products without notice.
- GTM semiconductor products are not warranted to be suitable for use in life-support Applications, or systems.
- GTM assumes no liability for any consequence of customer product design, infringement of patents, or application assistance.

Head Office And Factory:

- Taiwan:** No. 17-1 Tatung Rd. Fu Kou Hsin-Chu Industrial Park, Hsin-Chu, Taiwan, R. O. C.
- TEL : 886-3-597-7061 FAX : 886-3-597-9220, 597-0785
- China:** (201203) No.255, Jang-Jiang Tsai-Lueng RD. , Pu-Dung-Hsin District, Shang-Hai City, China
- TEL : 86-21-5895-7671 ~ 4 FAX : 86-21-38950165