

GLP1-240M
Cordless TX-LPF

Inquire

Application

for Spurious reduction

Characteristics


GLP1-240M	
Zin/Zout	50 ohm Nominal
Pass Band	240 up to 250MHz
Insertion Loss	1.0dB max (240 up to 250MHz)
V.S.W.R	1.5 max (240 up to 250MHz)
Attenuation	28 dB min (at 2f : 480 up to 500MHz)
	30 dB min (at 3f : 720 up to 750MHz)

Number of ordered pieces

1000pcs/Reel

Dimensions

Dimension (Unit : mm)

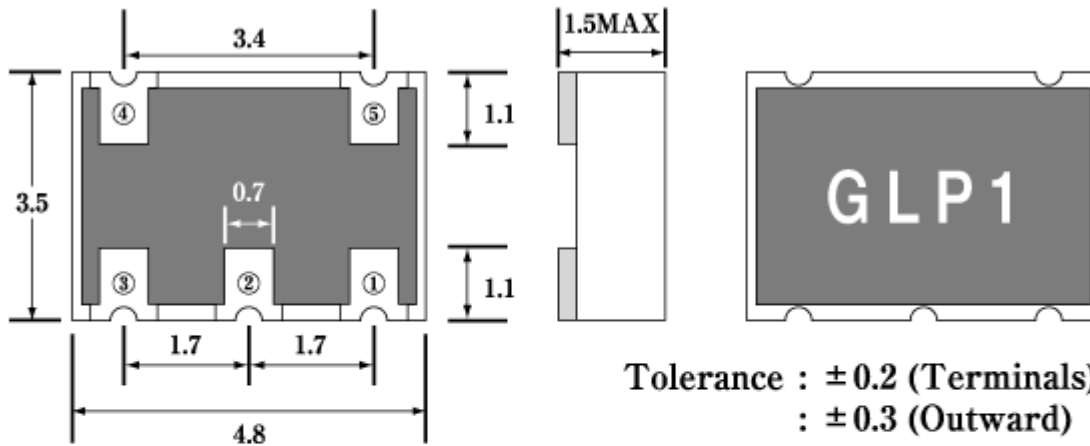

Tolerance : ± 0.2 (Terminals)
: ± 0.3 (Outward)


Terminal	
①	Input
②	GND
③	Output
④	Fixed
⑤	Fixed

Note

Do not connect any wiring (inclusive of grounding) to terminals No.4 and No.5.

They are provided solely for internal connections.

Frequency Data

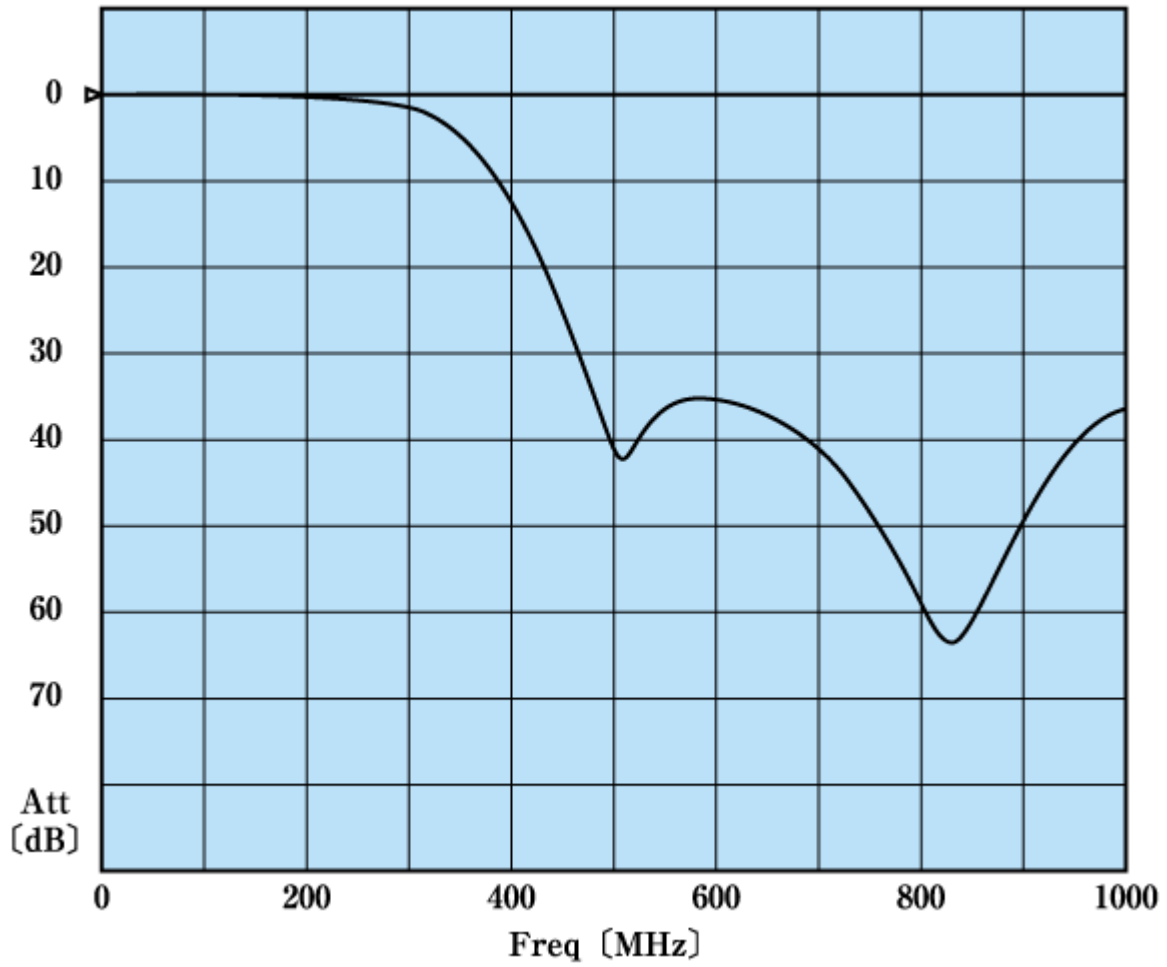

► Products II