

GLP10-512M
UHF US&EU Band

Inquiry

Application

for Spurious reduction

Characteristics


GLP10-512M	
Zin/Zout	50 ohm Nominal
Pass Band	450 up to 512MHz
Insertion Loss	0.7dB max (450 up to 512MHz)
V.S.W.R	1.5 max (450 up to 512MHz)
Attenuation	30 dB min (at 2f : 900 up to 1024MHz)
	25 dB min (at 3f : 1350 up to 1536MHz)
Rated Power	5W (450 up to 512MHz)
Max Input Power	7W 5minutes

Number of ordered pieces

1000pcs/Reel

Dimensions

Dimension (Unit : mm)

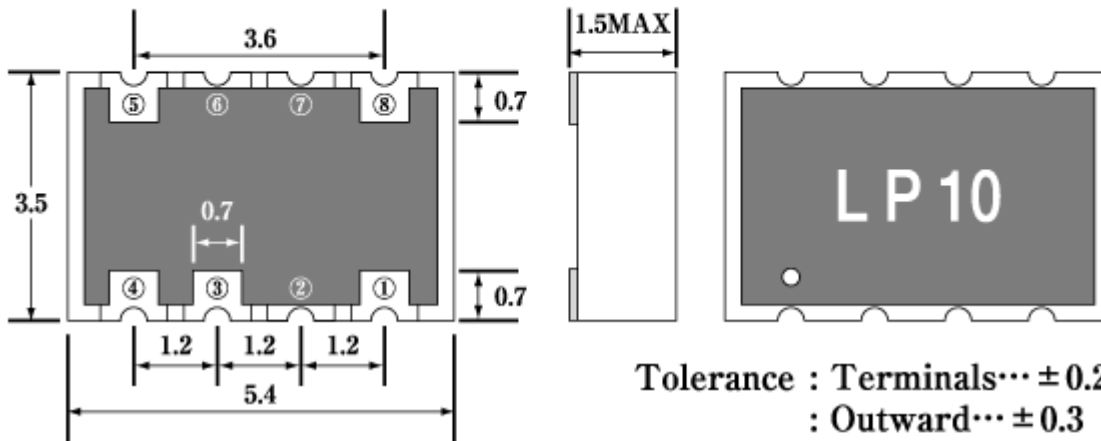

Tolerance : Terminals... ±0.2
: Outward... ±0.3

Terminal	
①	Input
③	GND
④	Output
⑤	GND
⑧	GND

Note

Do not connect any wiring (inclusive of grounding) to terminals No.2,6 and No.7. They are provided solely for internal connections.

Frequency Data

