GN 125

Adjustable handles

- **Black-oxide steel** body.
- **Black-oxide steel** arm with DIN 319 black phenolic based (PF) Duroplast ball knob available in two executions:
  - with straight arm (type D)
  - with inclined arm by a 15° angle (type E).
- Black-oxide steel threaded **bushing.**
- Treated steel spring.
- Natural anodised aluminium boss-cap.

GN 125 adjustable handles are used or applications having a limited space or where a particular handle position is required. The threaded bushing is connected to the handle via serrations and can be easily disengaged. By pulling the handle, the internal mechanism disengages the serrations and allowes the handle to swivel to the ideal clamping position. By releasing the handle, the mechanism automatically re-engages serrations.

type D

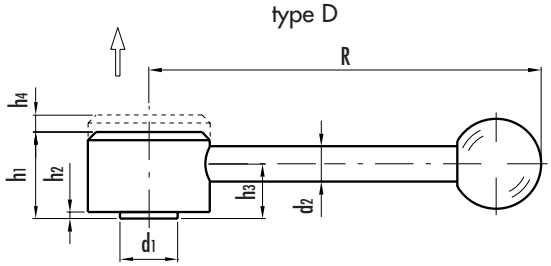

type E

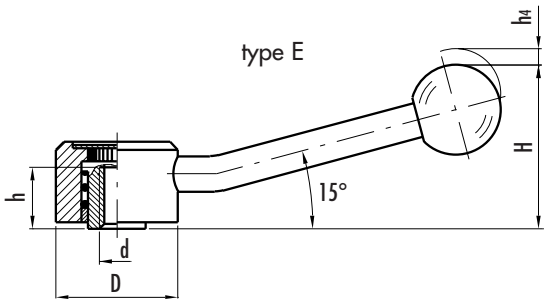

Standard elements	Main dimensions									Mounting hole		Weight
Description	D	R	H	h1	h2	h3	h4	d1	d2	d 6H	h	grams
GN 125-32-M6-D	32	100	-	20.5	1.5	12.5	4	13.5	8	M6	11	141
GN 125-32-M6-E			36							M6		141
GN 125-32-M8-D			-							M8		139
GN 125-32-M8-E			36							M8		139
GN 125-36-M8-D	36	120	-	24.5	2	15	4.5	16	10	M8	14	223
GN 125-36-M8-E			45							M8		223
GN 125-36-M10-D			-							M10		223
GN 125-36-M10-E			45							M10		223
GN 125-40-M10-D	40	130	-	26.5	2	16	4.5	19	12	M10	17	307
GN 125-40-M10-E			50							M10		307
GN 125-40-M12-D			-							M12		301
GN 125-40-M12-E			50							M12		301
GN 125-45-M12-D	45	145	-	31.5	2	20	5	23	12	M12	23	425
GN 125-45-M12-E			60							M12		425
GN 125-45-M14-D			-							M14		430
GN 125-45-M14-E			60							M14		430
GN 125-45-M16-D			-							M16		406
GN 125-45-M16-E			60							M16		406

elesa+GANTER
"ELESA" and "GANTERGRIFF" models all rights reserved in accordance with the law. Always mention the source when reproducing our drawings.