


GP10A THRU GP10Y

GLASS PASSIVATED JUNCTION RECTIFIER

Reverse Voltage - 50 to 1600 Volts

Forward Current - 1.0 Ampere

PATENTED*

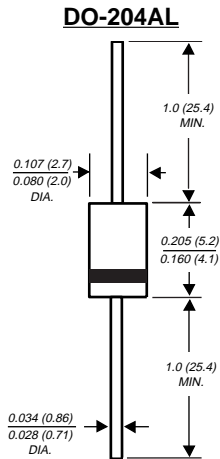

NOTE: Lead diameter is 0.026 (0.66) for suffix "E" part numbers
0.023 (0.58)

Dimensions in inches and (millimeters)

* Glass-plastic encapsulation is covered by

Patent No. 3,996,602 and brazed-lead assembly by Patent No. 3,930,306

SUPERRECTIFIER®

FEATURES

- ◆ Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- ◆ High temperature metallurgically bonded construction
- ◆ Glass passivated cavity-free junction
- ◆ Capable of meeting environmental standards of MIL-S-19500
- ◆ 1.0 Ampere operation at $T_A=75^\circ\text{C}$ and 55°C with no thermal runaway
- ◆ Typical I_R less than $0.1\mu\text{A}$
- ◆ High temperature soldering guaranteed: $350^\circ\text{C}/10$ seconds, $0.375"$ (9.5mm) lead length, 5 lbs. (2.3kg) tension

MECHANICAL DATA

Case: JEDEC DO-204AL molded plastic over glass body
Terminals: Plated axial leads, solderable per MIL-STD-750, Method 2026
Polarity: Color band denotes cathode end
Mounting Position: Any
Weight: 0.012 ounce, 0.3 gram

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

	SYMBOLS	A	B	D	G	J	K	M	N	Q	T	V	W	Y	UNITS
Maximum repetitive peak reverse voltage	V_{RRM}	50 to 1600 Volts (SEE FIG. 5)													Volts
Maximum average forward rectified current 0.375" (9.5mm) lead length (SEE FIG. 1)	$I_{(AV)}$	1.0													Amp
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	30.0						25.0						Amps	
Maximum instantaneous forward voltage at 1.0A	V_F	1.1			1.2			1.3			Volts				
Maximum full load reverse current, full cycle average, 0.375" (9.5mm) lead lengths at $T_A=75^\circ\text{C}$	$I_{R(AV)}$	30.0													μA
Maximum DC reverse current at rated DC blocking voltage	I_R	$T_A=25^\circ\text{C}$						$T_A=125^\circ\text{C}$						μA	
Typical reverse recovery time (NOTE 1)	t_{rr}	2.0													μs
Typical junction capacitance (NOTE 2)	C_J	8.0			7.0			5.0			pF				
Typical thermal resistance (NOTE 3)	$R_{\theta JA}$	55.0													$^\circ\text{C}/\text{W}$
Operating junction and storage temperature range	T_J, T_{STG}	-65 to +175						-65 to +150						$^\circ\text{C}$	

NOTES:

- (1) Reverse recovery test condition: $I_F=0.5\text{A}$, $I_R=1.0\text{A}$, $I_{rr}=0.25\text{A}$
- (2) Measured at 1.0 MHz and applied reverse voltage of 4.0 Volts
- (3) Thermal resistance from junction to ambient at $0.375"$ (9.5mm) lead lengths, P.C.B. mounted

RATINGS AND CHARACTERISTIC CURVES GP10A THRU GP10Y




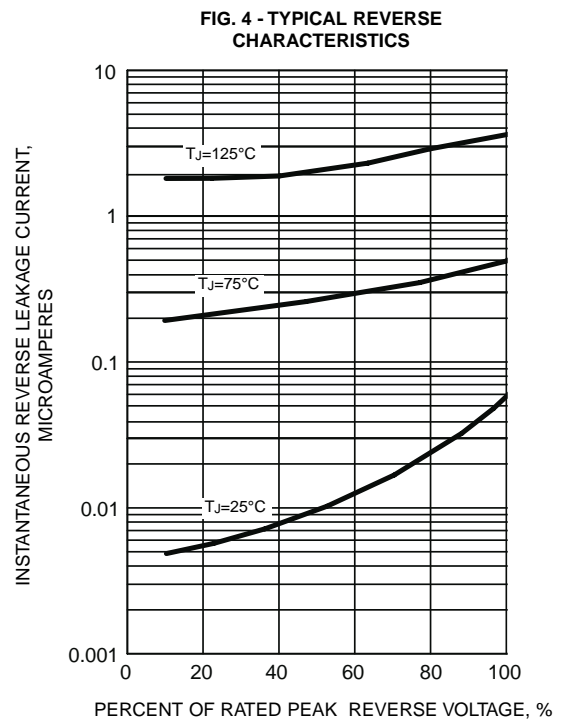


FIG. 5 - MAXIMUM REPETITIVE PEAK REVERSE VOLTAGE, V_{RRM}

GP10A50V
GP10B100V
GP10D200V
GP10G400V
GP10J600V
GP10K800V
GP10M	1000V
GP10N	1100V
GP10Q	1200V
GP10T	1300V
GP10V	1400V
GP10W	1500V
GP10Y	1600V

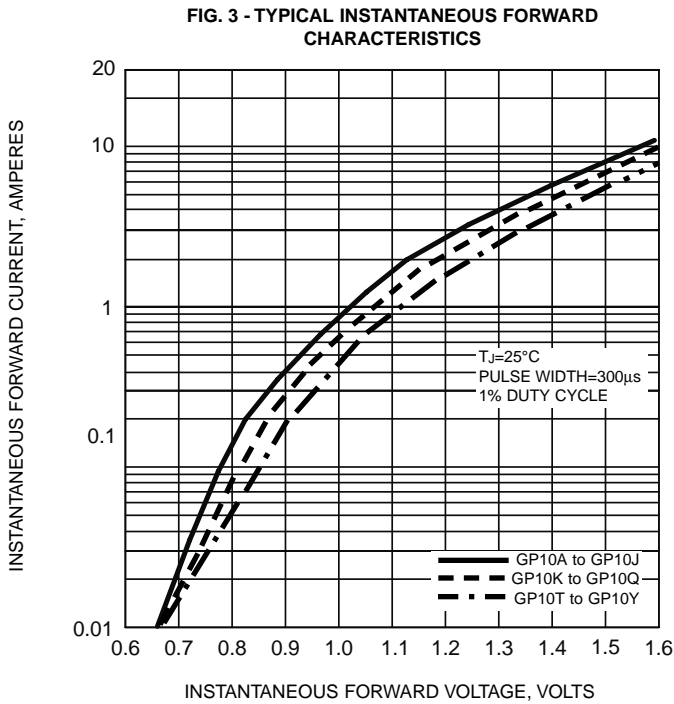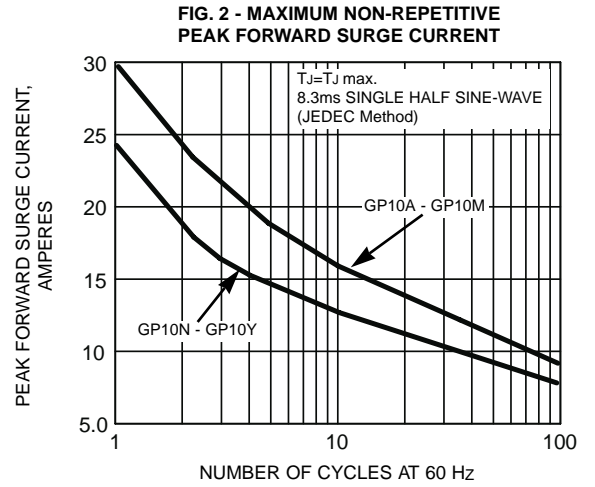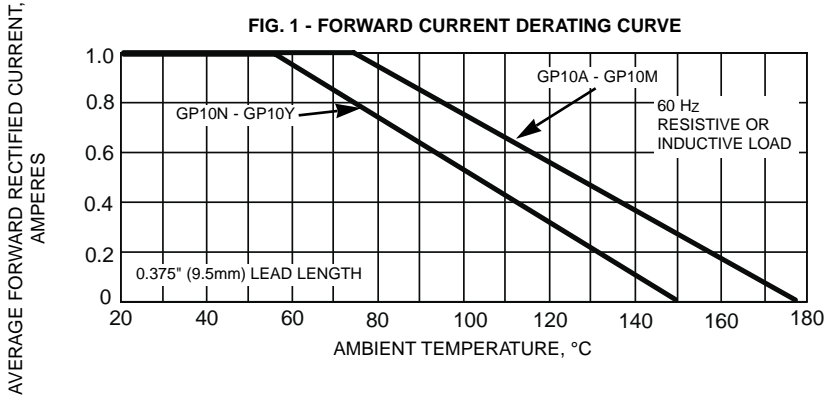