

# GP1A35R OPIC Photointerrupter with Encoder Functions


## ■ Features

1. 2-phase (A, B) digital output
2. High sensing accuracy  
(Disk slit pitch: 0.22mm, Moiré stripe application)
3. TTL compatible output
4. Compact and light

## ■ Applications

1. Electronic typewriters, printers
2. Robots, X-Y plotter
3. Numerical control machines

## ■ Outline Dimensions (Unit : mm)

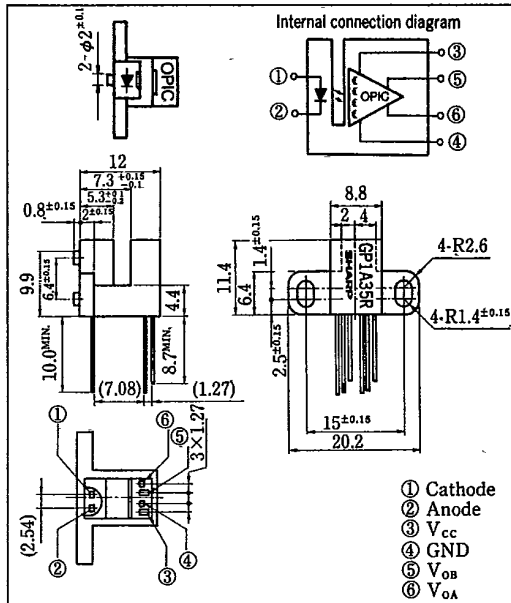

※OPIC is a registered trademark of Sharp and stands for Optical IC. It has a light detecting element and signal processing circuitry integrated onto a single chip.



## ■ Absolute Maximum Ratings

(T<sub>a</sub> = 25°C)

Parameter	Symbol	Rating	Unit
Forward current	I <sub>F</sub>	65	mA
*1 Peak forward current	I <sub>FM</sub>	1	A
Reverse voltage	V <sub>R</sub>	6	V
Power dissipation	P	100	mW
Supply voltage	V <sub>CC</sub>	7	V
Low level output current	I <sub>OL</sub>	20	mA
Power dissipation	P <sub>O</sub>	250	mW
Operating temperature	T <sub>opr</sub>	0 ~ +70	°C
Storage temperature	T <sub>stg</sub>	-40 ~ +80	°C
*2 Soldering temperature	T <sub>sol</sub>	260	°C

\*1 Pulse width ≤ 100 μs, Duty ratio = 0.01 \*2 For 5 seconds

SHARP


Electro-optical Characteristics

(Ta=25°C)

Parameter		Symbol	Conditions	MIN.	TYP.	MAX.	Unit	
Input	Forward voltage	$V_F$	$I_F=30\text{mA}$	—	1.2	1.5	V	
	Reverse current	$I_R$	$V_R=3\text{V}$	—	—	10	$\mu\text{A}$	
Output	Output voltage	Phase A	High level	$V_{AH}$	$V_{CC}=5\text{V}, I_F=30\text{mA}$	2.4	4.9	—
			Low level	$V_{AL}$	$I_{OL}=8\text{mA}, I_F=30\text{mA}, V_{CC}=5\text{V}$	—	0.1	0.4
		Phase B	High level	$V_{BH}$	$V_{CC}=5\text{V}, I_F=30\text{mA}$	2.4	4.9	—
			Low level	$V_{BL}$	$I_{OL}=8\text{mA}, I_F=30\text{mA}, V_{CC}=5\text{V}$	—	0.1	0.4
	Dissipation current		$I_{CC}$	$V_{CC}=5\text{V}, I_F=30\text{mA}$ Both phases A and B at low level	—	—	20	mA
	Transfer characteristics	Duty ratio *1	$D_A$	$I_F=30\text{mA}$ $f=12\text{kHz}$ $V_{CC}=5\text{V}$	30	50	70	%
$D_B$			50		90	130	degree	
Phase difference *1		$\theta_{AB}$	—	1.0	2.0	$\mu\text{sec}$		
		Response speed *1	$t_r$	$I_F=30\text{mA}, V_{CC}=5\text{V}$	—	1.0	2.0	$\mu\text{sec}$

Note: It is recommended that the GP1A35R be used under the condition of  $I_F=30\text{mA}$  Typ. for which it is designed.  
\*1 Duty ratio, phase difference: Average disk rotation time per turn.

Output Waveforms

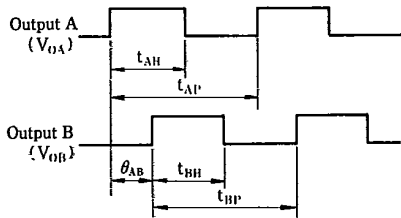

$$D_A = \frac{t_{AH}}{t_{AP}} \times 100$$

$$D_B = \frac{t_{BH}}{t_{BP}} \times 100$$

Rotational direction: Counterclockwise when seen from OPIC light detector

Fig. 1 Forward Current vs. Ambient Temperature

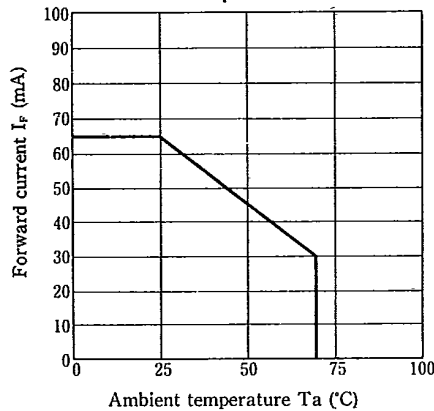


Fig. 2 Output Power Dissipation vs. Ambient Temperature

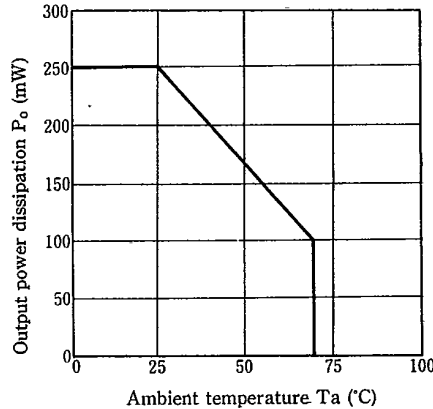


Fig. 3 Duty Ratio vs. Frequency

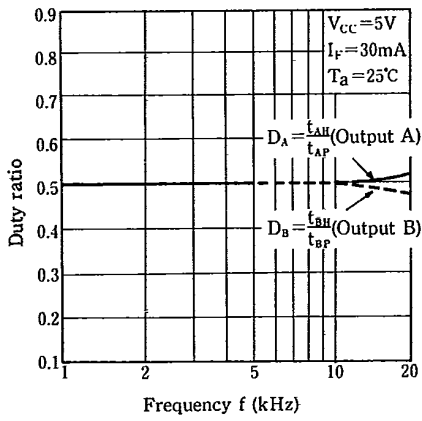


Fig. 4 Phase Difference vs. Frequency

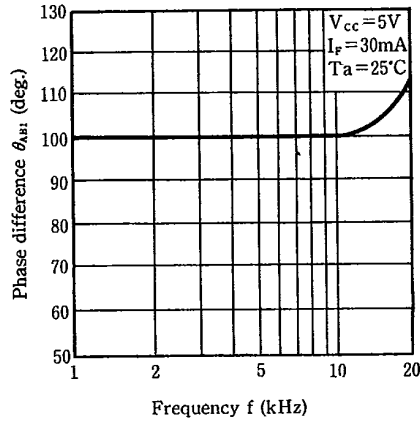


Fig. 5 Duty Ratio vs. Ambient Temperature


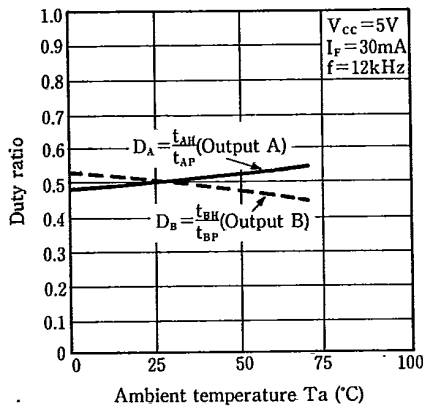


Fig. 6 Phase Difference vs. Ambient Temperature

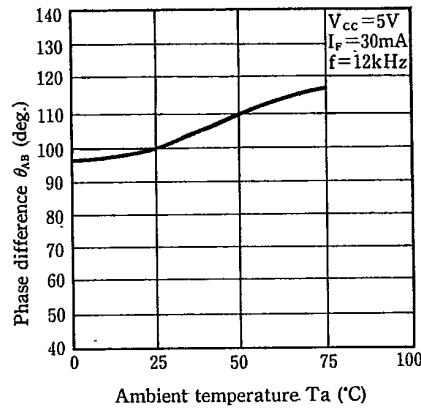

7

Fig. 7 Duty Ratio vs. Distance (X direction)



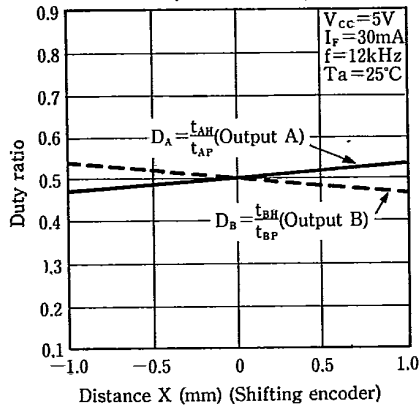


Fig. 8 Phase Difference vs. Distance (X direction)

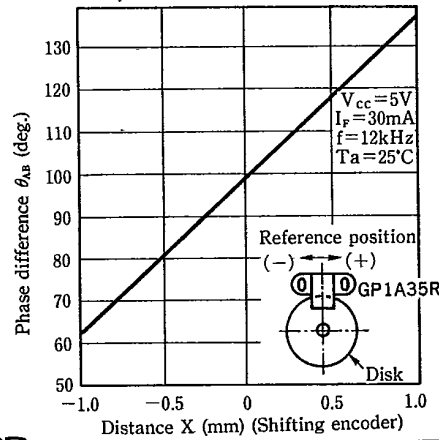


T-41-73


**Fig. 9 Duty Ratio vs. Distance (Y direction)**

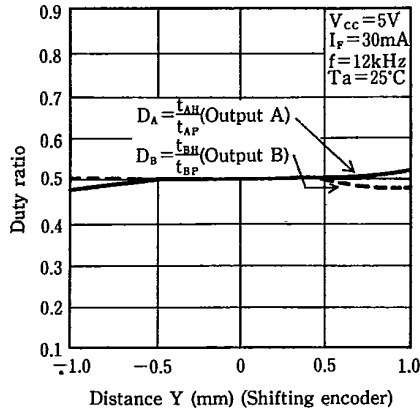


**Fig. 10 Phase Difference vs. Distance (Y direction)**

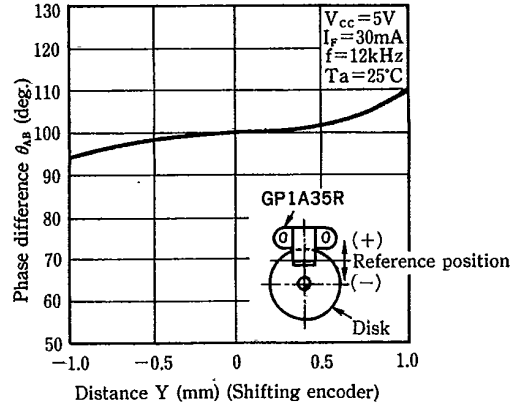

**Fig. 11 Duty Ratio vs. Distance (Z direction)**

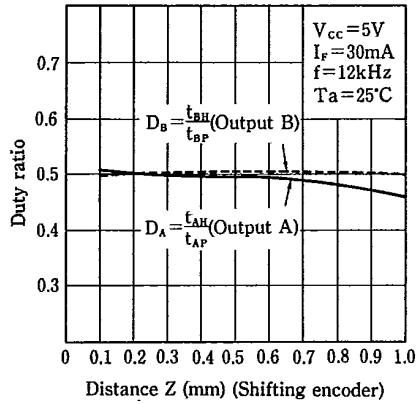


**Fig. 12 Phase Difference vs. Distance (Z direction)**

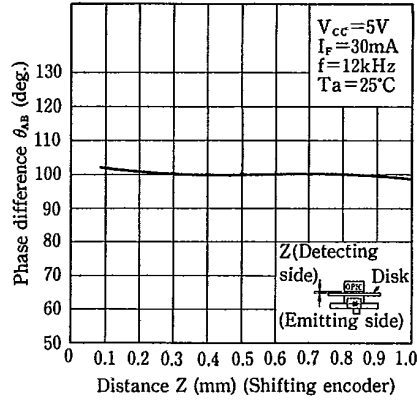

T-41-73

<Measurement conditions>

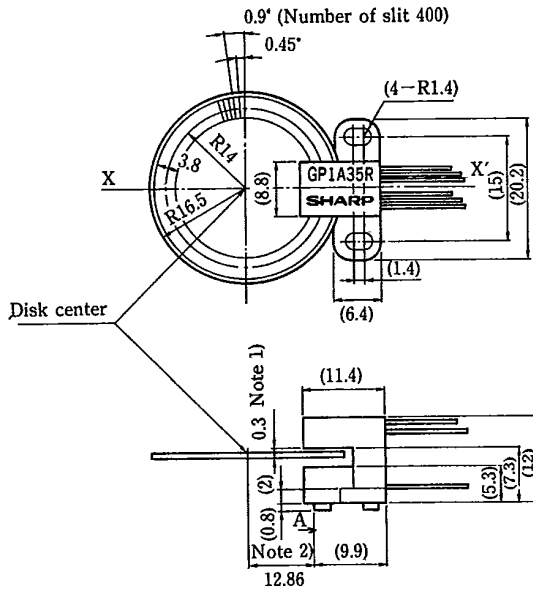

- Note 1) Distance between disk surface and case surface in the detector side is 0.3mm.  
 Note 2) Encoder positioning pin is positioned on X-X' axis.  
 Distance between center of disk and portion A of positioning pin is 12.86mm.  
 Note 3) Center of disk slit is R14.0.

(Precautions for Use)

- Note 1) In order to stabilize power supply line, connect a by-pass capacitor of more than  $0.01\mu\text{F}$  between  $V_{CC}$  and GND near the device.  
 Note 2) This module is designed to be operated at  $I_F=30\text{mA}$  TYP.

