

# GP1S05

## Wide Gap, High Sensing Accuracy Type Photointerrupter

### ■ Features


1. High sensing accuracy (Slit width : 0.5mm)
2. Gap between LED and detector : 5mm
3. High speed response ( $t_r$  : TYP.  $3\mu s$  at  $R_L=100\Omega$ )
4. PWB direct mounting type package

### ■ Applications

1. Copiers, printers, facsimiles
2. VCRs, cassette decks
3. Optoelectronic switches, optoelectronic counters

### ■ Outline Dimensions

(Unit : mm)

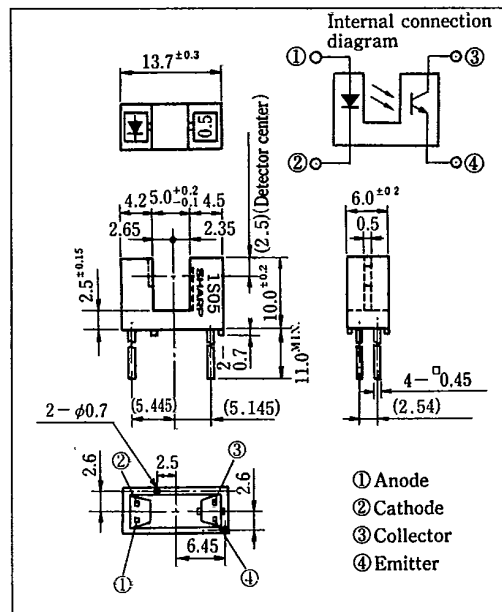

7

### ■ Absolute Maximum Ratings

(Ta=25°C)

	Parameter	Symbol	Rating	Unit
Input	Forward current	$I_F$	50	mA
	*1 Peak forward current	$I_{FM}$	1	A
	Reverse voltage	$V_R$	6	V
	Power dissipation	$P$	75	mW
Output	Collector-emitter voltage	$V_{CEO}$	35	V
	Emitter-collector voltage	$V_{ECO}$	6	V
	Collector current	$I_C$	20	mA
	Collector power dissipation	$P_C$	75	mW
	Operating temperature	$T_{opr}$	-25 ~ +85	°C
	Storage temperature	$T_{stg}$	-40 ~ +100	°C
	*2 Soldering temperature	$T_{sol}$	260	°C

\*1 Pulse width  $\leq 100\mu s$ , Duty ratio = 0.01

\*2 For 5 seconds

Electro-optical Characteristics

Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Input	Forward voltage	$I_F = 20\text{mA}$	—	1.2	1.4	V
	Peak forward voltage	$I_{FM} = 0.5\text{A}$	—	3.0	4.0	V
	Reverse current	$V_R = 3\text{V}$	—	—	10	$\mu\text{A}$
Output	Collector dark current	$V_{CE} = 20\text{V}$	—	$10^{-9}$	$10^{-7}$	A
	Current transfer ratio	$I_F = 20\text{mA}, V_{CE} = 5\text{V}$	2.5	—	75	%
Transfer characteristics	Collector-emitter saturation voltage	$I_F = 40\text{mA}, I_C = 0.2\text{mA}$	—	—	0.4	V
	Response time (Rise)	$I_C = 2\text{mA}, V_{CE} = 2\text{V}, R_L = 100\Omega$	—	3	15	$\mu\text{s}$
	Response time (Fall)		—	4	20	$\mu\text{s}$

Fig. 1 Forward Current vs. Ambient Temperature

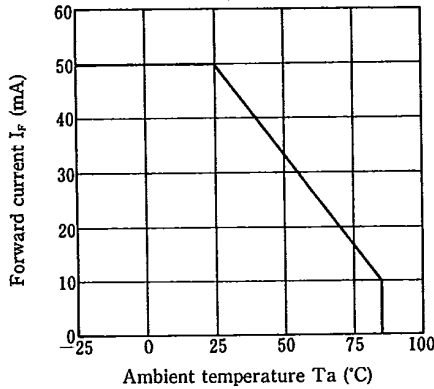


Fig. 2 Collector Power Dissipation vs. Ambient Temperature

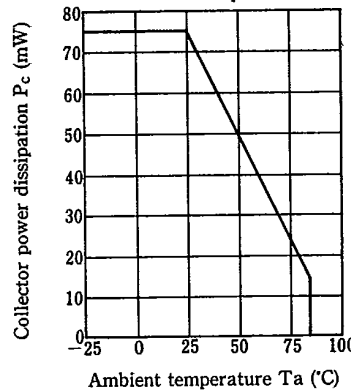


Fig. 3 Peak Forward Current vs. Duty Ratio



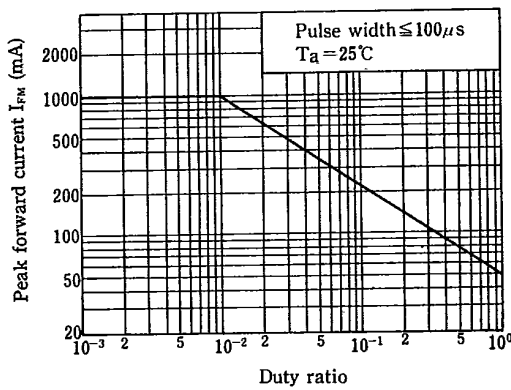



Fig. 4 Forward Current vs. Forward Voltage

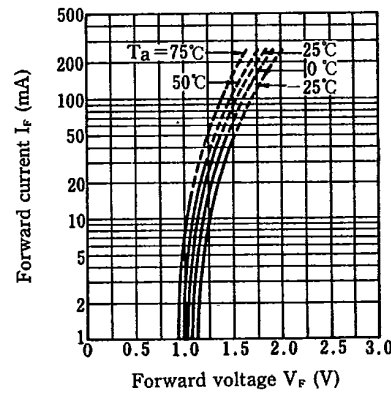


**Fig. 5 Collector Current vs. Forward Current**

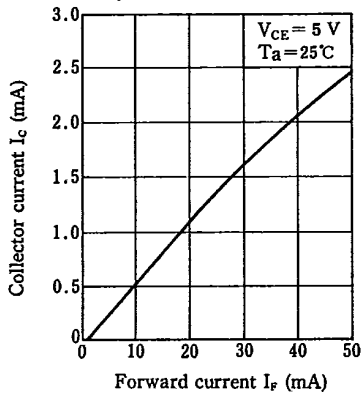


**Fig. 6 Collector Current vs. Collector-emitter Voltage**

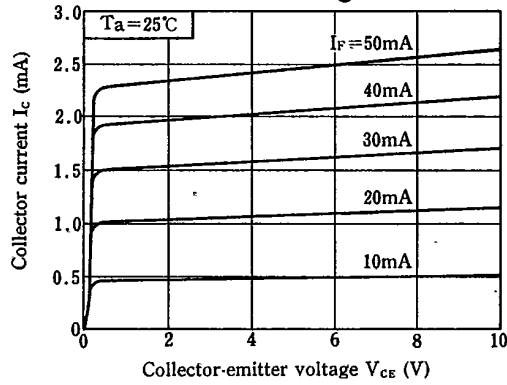


**Fig. 7 Collector Current vs. Ambient Temperature**

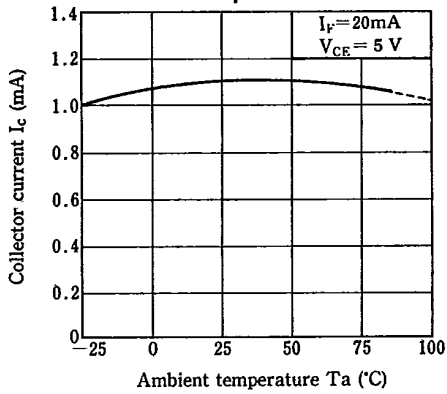

**Fig. 8 Collector-emitter Saturation Voltage vs. Ambient Temperature**

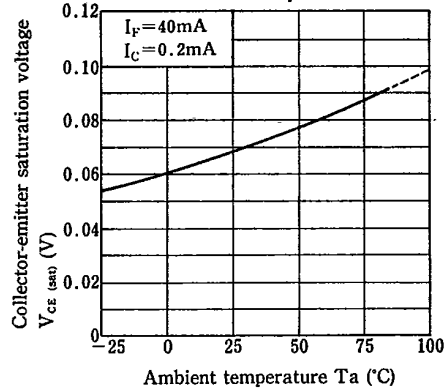

**Fig. 9 Response Time vs. Load Resistance**

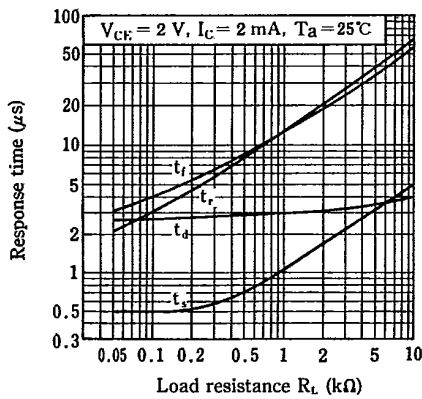

**Test Circuit for Response Time**

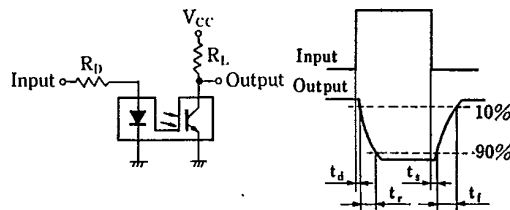


Fig. 10 Frequency Response

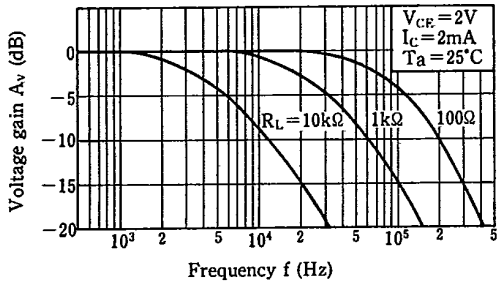


Fig. 11 Collector Dark Current vs. Ambient Temperature

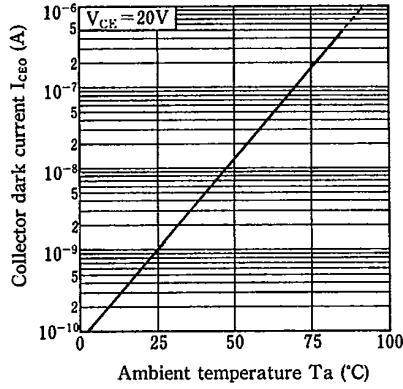


Fig. 12 Relative Collector Current vs. Shield Distance (1)

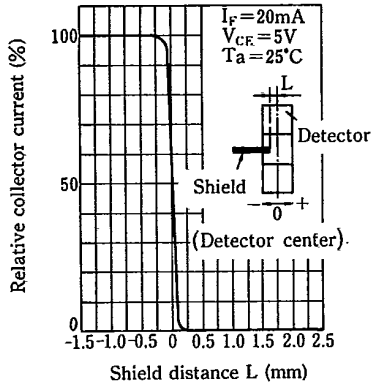


Fig. 13 Relative Collector Current vs. Shield Distance (2)

