

# GP1S07 Subminiature PhotoInterrupter

## ■ Features


1. Ultra-compact (Capacity: 0.06cc) and light
2. PWB mounting type package
3. High sensing accuracy (Slit width: 0.8mm)

## ■ Applications

1. Still camera
2. Miniprinter
3. Microfloppy disk
4. Compact equipment

## ■ Outline Dimensions

(Unit: mm)

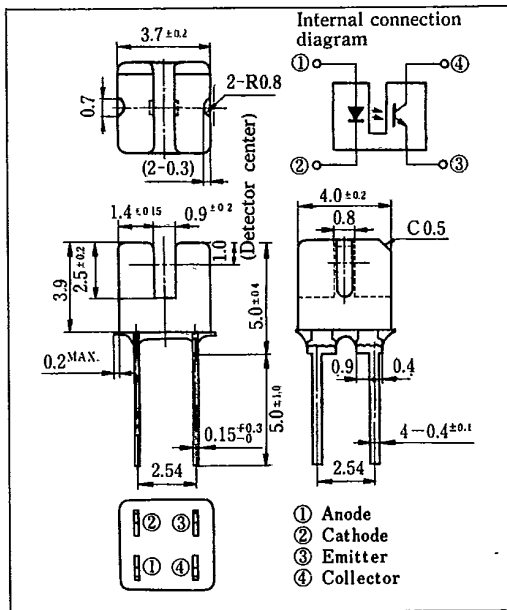

## ■ Absolute Maximum Ratings

( $T_a = 25^\circ\text{C}$ )

| Parameter                | Symbol                      | Rating          | Unit             |
|--------------------------|-----------------------------|-----------------|------------------|
| Input                    | Forward current             | $I_F$           | 50 mA            |
|                          | Reverse voltage             | $V_R$           | 6 V              |
|                          | Power dissipation           | $P$             | 75 mW            |
| Output                   | Collector-emitter voltage   | $V_{CEO}$       | 35 V             |
|                          | Emitter-collector voltage   | $V_{ECO}$       | 6 V              |
|                          | Collector current           | $I_C$           | 20 mA            |
|                          | Collector power dissipation | $P_C$           | 75 mW            |
| Total power dissipation  | $P_{tot}$                   | 100 mW          |                  |
| Operating temperature    | $T_{opr}$                   | $-25 \sim +85$  | $^\circ\text{C}$ |
| Storage temperature      | $T_{stg}$                   | $-40 \sim +100$ | $^\circ\text{C}$ |
| *1 Soldering temperature | $T_{sol}$                   | 260             | $^\circ\text{C}$ |

\*1 For 3 seconds

SHARP

■ Electro-optical Characteristics

(Ta=25°C)

|                          | Parameter                            | Symbol        | Conditions                                       | MIN.        | TYP. | MAX.      | Unit          |
|--------------------------|--------------------------------------|---------------|--|-------------|------|-----------|---------------|
| Input                    | Forward voltage                      | $V_F$         | $I_F=20\text{mA}$                                | —           | 1.2  | 1.4       | V             |
|                          | Reverse current                      | $I_R$         | $V_R=3\text{V}$                                  | —           | —    | 10        | $\mu\text{A}$ |
| Output                   | Collector dark current               | $I_{CE0}$     | $V_{CE}=20\text{V}$                              | —           | —    | $10^{-7}$ | A             |
| Transfer characteristics | Current transfer ratio               | CTR           | $I_F=1.5\text{mA}$ , $V_{CE}=5\text{V}$          | 4.3         | 7.3  | 13.3      | %             |
|                          | Collector-emitter saturation voltage | $V_{CE(sat)}$ | $I_F=3\text{mA}$ , $I_C=30\mu\text{A}$           | —           | 0.08 | 0.4       | V             |
|                          | Response time (Rise)                 | $t_r$         | $I_C=0.1\text{mA}$ , $V_{CE}=5\text{V}$ , $R_L=$ | —           | 50   | 150       | $\mu\text{s}$ |
|                          | Response time (Fall)                 | $t_f$         |  | 1k $\Omega$ | —    | 50        | 150           |

Fig. 1 Forward Current vs. Ambient Temperature

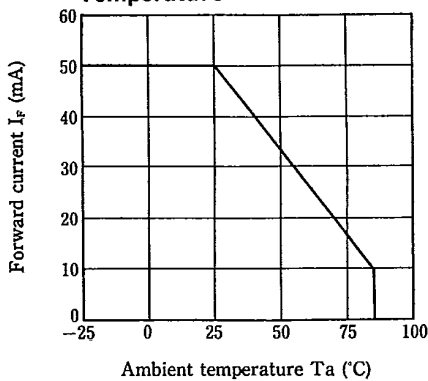


Fig. 2 Power Dissipation vs. Ambient Temperature

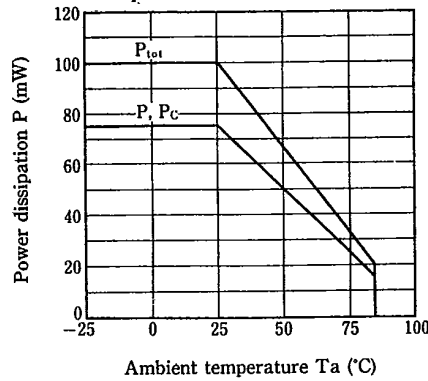


Fig. 3 Forward Current vs. Forward Voltage



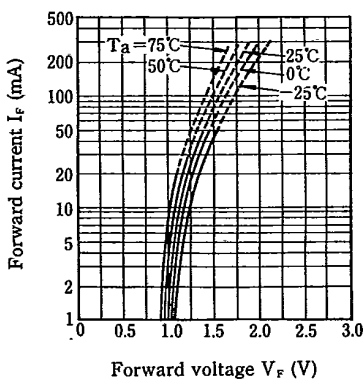



Fig. 4 Collector Current vs. Forward Current

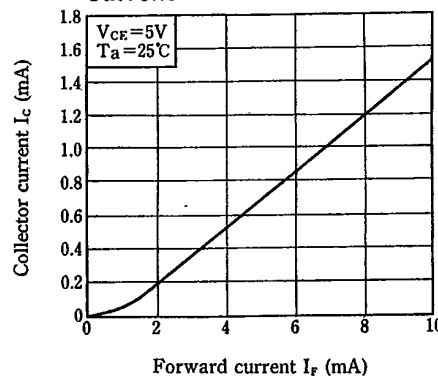


**Fig. 5 Collector Current vs. Collector-emitter Voltage**

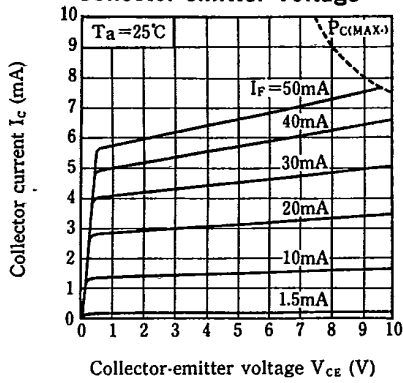


**Fig. 6 Collector Current vs. Ambient Temperature**

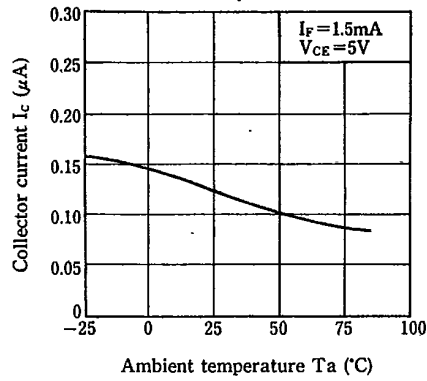


**Fig. 7 Collector-emitter Saturation Voltage vs. Ambient Temperature**

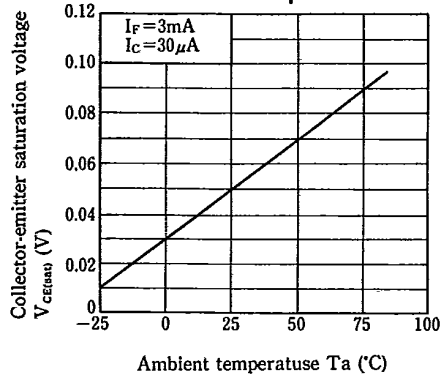


**Fig. 8 Collector Dark Current vs. Ambient Temperature**

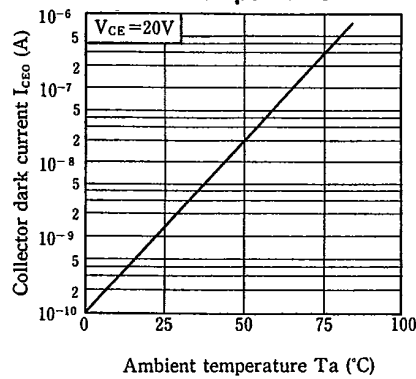


**Fig. 9 Response Time vs. Load Resistance**

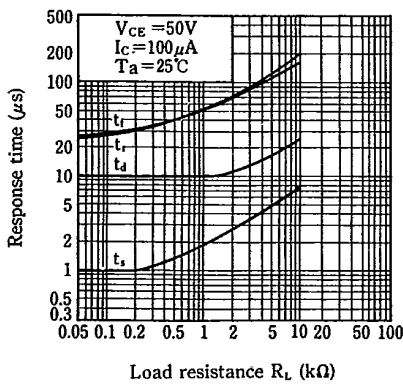

**Test Circuit for Response Time**

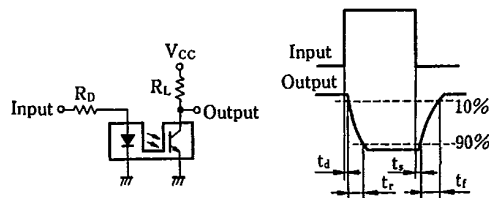

**Fig. 10 Relative Collector Current vs. Shield Distance (1)**

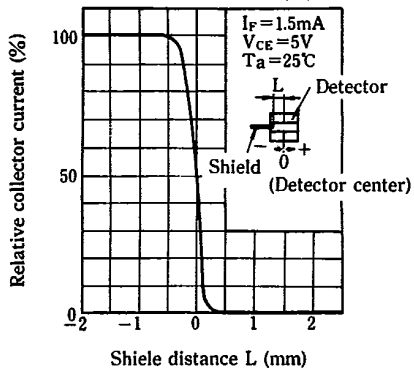

**Fig. 11 Relative Collector Current vs. Shield Distance (2)**

