

# GP1S29

## Subminiature Photointerrupter

### ■ Features

1. Ultra-compact type
2. Thin detection portion  
(Thickness of detection portion: 3.2mm)


### ■ Applications

1. Cameras
2. Floppy disk drives

Note) Please use carefully not to receive external disturbing light because the back face of detector element is not covered with case.

### ■ Outline Dimensions


(Unit : mm)

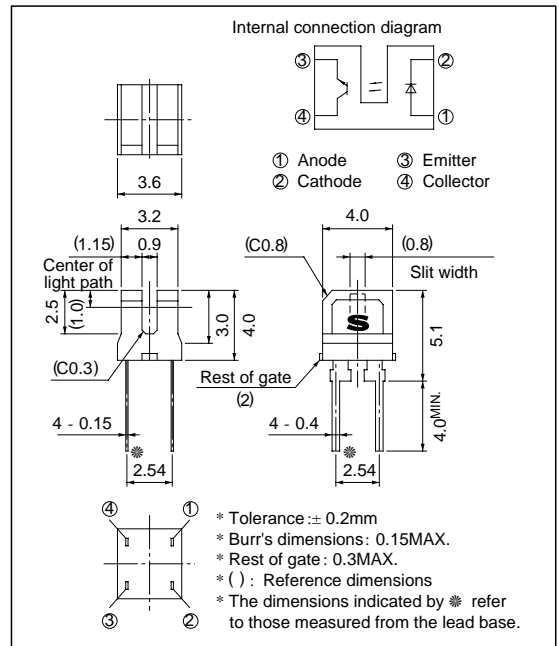

### ■ Absolute Maximum Ratings

(Ta = 25°C)

Parameter	Symbol	Rating	Unit
Input	Forward current	I <sub>F</sub>	50 mA
	Reverse voltage	V <sub>R</sub>	6 V
	Power dissipation	P	75 mW
Output	Collector-emitter voltage	V <sub>CEO</sub>	35 V
	Emitter-collector voltage	V <sub>ECO</sub>	6 V
	Collector current	I <sub>C</sub>	20 mA
	Collector power dissipation	P <sub>C</sub>	75 mW
Total power dissipation	P <sub>tot</sub>	100 mW	
Operating temperature	T <sub>opr</sub>	- 25 to + 85	°C
Storage temperature	T <sub>stg</sub>	- 40 to + 100	°C
*1 Soldering temperature	T <sub>sol</sub>	260	°C



\*1 For 5 seconds


www.DataSheet4U.com

**Electro-optical Characteristics**


( $T_a = 25^\circ\text{C}$ )

Parameter		Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Input	Forward voltage	$V_F$	$I_F = 20\text{mA}$	-	1.2	1.4	V
	Reverse current	$I_R$	$V_R = 3\text{V}$	-	-	10	$\mu\text{A}$
Output	Collector dark current	$I_{CEO}$	$V_{CE} = 20\text{V}$	-	-	$1 \times 10^{-7}$	A
Transfer-characteristics	Collector Current	$I_c$	$I_F = 1.5\text{mA}, V_{CE} = 5\text{V}$	40	-	240	$\mu\text{A}$
	Collector-emitter saturation voltage	$V_{CE}(\text{sat})$	$I_F = 3\text{mA}, I_C = 30 \mu\text{A}$	-	-	0.4	V
	Response time	Rise time	$t_r$	$V_{CE} = 5\text{V}, R_L = 1\text{k}\Omega$ $I_C = 100 \mu\text{A}$	-	50	150
Fall time		$t_f$	-		50	150	$\mu\text{s}$


**Fig. 1 Forward Current vs. Ambient Temperature**

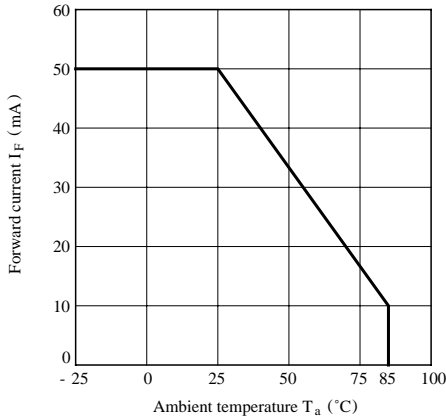


**Fig. 2 Power Dissipation vs. Ambient Temperature**

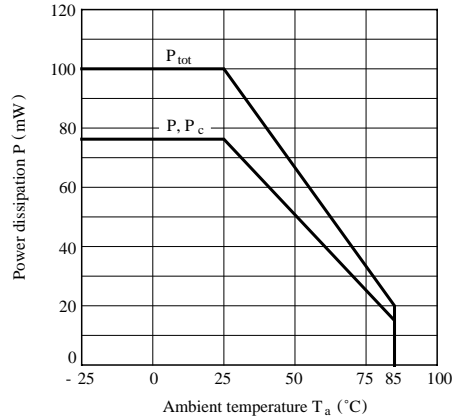


**Fig. 3 Forward Current vs. Forward Voltage**

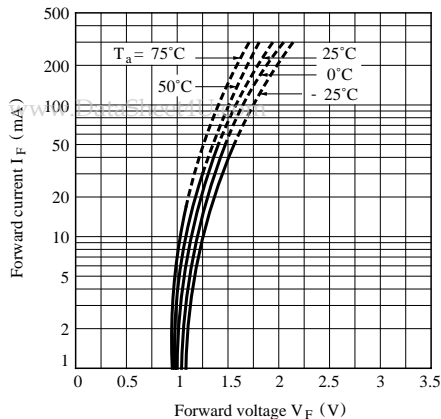


**Fig. 4 Collector Current vs. Forward Current**

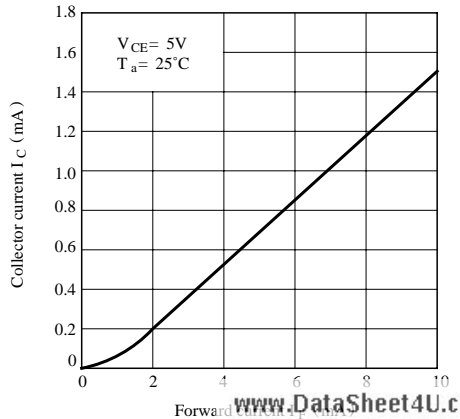


**Fig. 5 Collector Current vs. Collector-emitter Voltage**

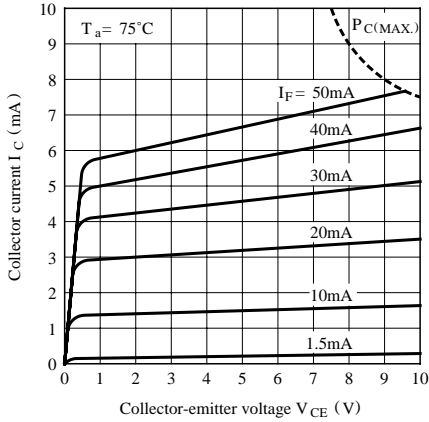


**Fig. 6 Collector Current vs. Ambient Temperature**

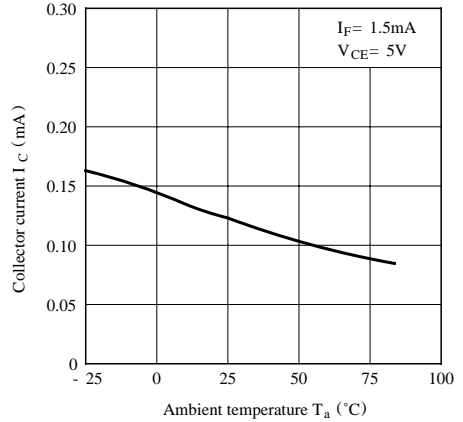


**Fig. 7 Collector-emitter Saturation Voltage vs. Ambient Temperature**

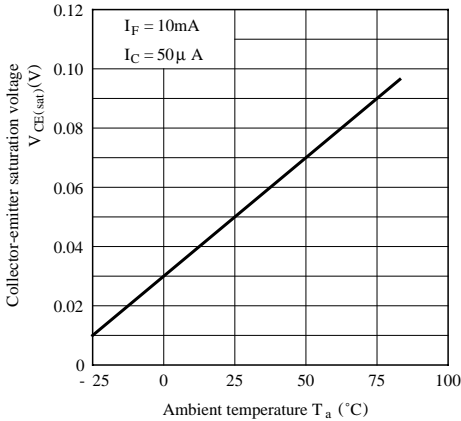


**Fig. 8 Collector Dark Current vs. Ambient Temperature**

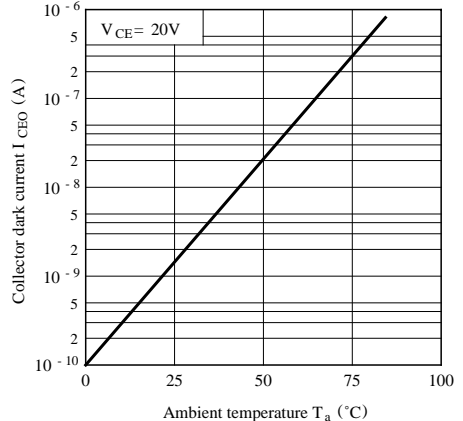


**Fig. 9 Response Time vs. Load Resistance**

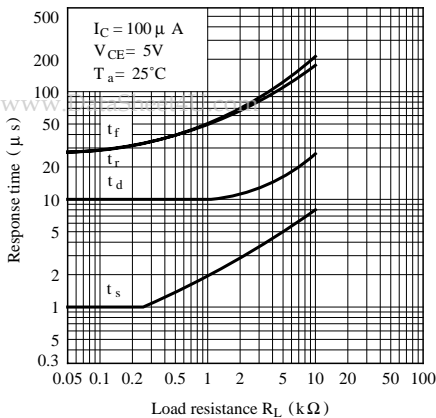


**Test Circuit for Response Time**

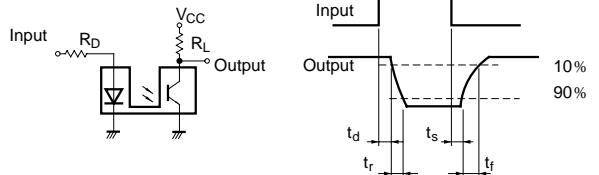

**Fig.10 Relative Collector Current vs. Shield Distance (1)**

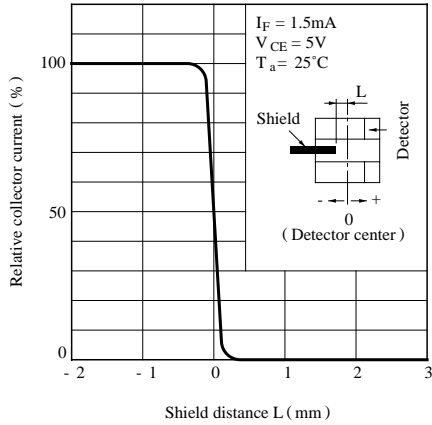

**Fig.11 Relative Collector Current vs. Shield Distance (2)**

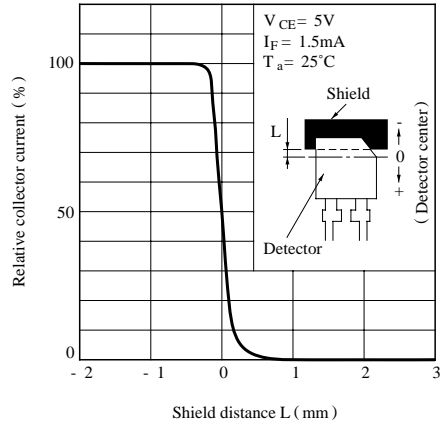

- Please refer to the chapter “Precautions for Use”.