





# 1.0 Amp Glass Passivated Sintered Rectifiers

**GPZ10A . . . 10Q Series**

## Description



## Mechanical Dimensions

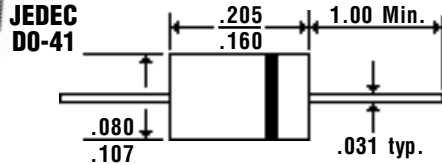

### Features


- **LOWEST COST FOR GLASS SINTERED CONSTRUCTION**
- **LOWEST  $V_F$  FOR GLASS SINTERED CONSTRUCTION**
- **TYPICAL  $I_R < 100$  nAmps**
- **1.0 AMP OPERATION @  $T_A = 55^\circ\text{C}$ , WITH NO THERMAL RUNAWAY**
- **SINTERED GLASS CAVITY-FREE JUNCTION**

Electrical Characteristics @ 25°C.	GPZ10A . . . 10Q Series										Units
Maximum Ratings	10A	10B	10D	10G	10J	10K	10M	10N	10Q		
Peak Repetitive Reverse Voltage... $V_{RRM}$	50	100	200	400	600	800	1000	1100	1200		Volts
RMS Reverse Voltage... $V_{R(rms)}$	35	70	140	280	420	560	700	770	840		Volts
DC Blocking Voltage... $V_{DC}$	50	100	200	400	600	800	1000	1100	1200		Volts
Average Forward Rectified Current... $I_{F(av)}$ Current 3/8" Lead Length @ $T_A = 55^\circ\text{C}$	.....				1.0	.....					Amps
Non-Repetitive Peak Forward Surge Current... $I_{FSM}$ ½ Sine Wave Superimposed on Rated Load	.....				30	.....					Amps
Forward Voltage @ 1.0A... $V_F$	< .....			1.0	> < . 1.1 . >						Volts
Full Load Reverse Current... $I_{R(av)}$ Full Cycle Average @ $T_A = 75^\circ\text{C}$	.....				30	.....					µAmps
DC Reverse Current... $I_{R(max)}$ @ Rated DC Blocking Voltage			$T_A = 25^\circ\text{C}$	.....		5.0	.....			µAmps	
			$T_A = 150^\circ\text{C}$	.....		200	.....			µAmps	
Typical Junction Capacitance... $C_J$ (Note 1)	< .....			8.0	> < .... 7.0 .... >						pF
Typical Thermal Resistance... $R_{\theta JA}$ (Note 2)	.....				45	.....					°C/W
Typical Reverse Recovery Time... $t_{RR}$ (Note 3)	.....				2.0	.....					µS
Operating & Storage Temperature Range... $T_J, T_{STRG}$	..... -65 to 175 .....										°C



# 1.0 Amp Glass Passivated Sintered Rectifiers

**GPZ10A . . . 10Q Series**

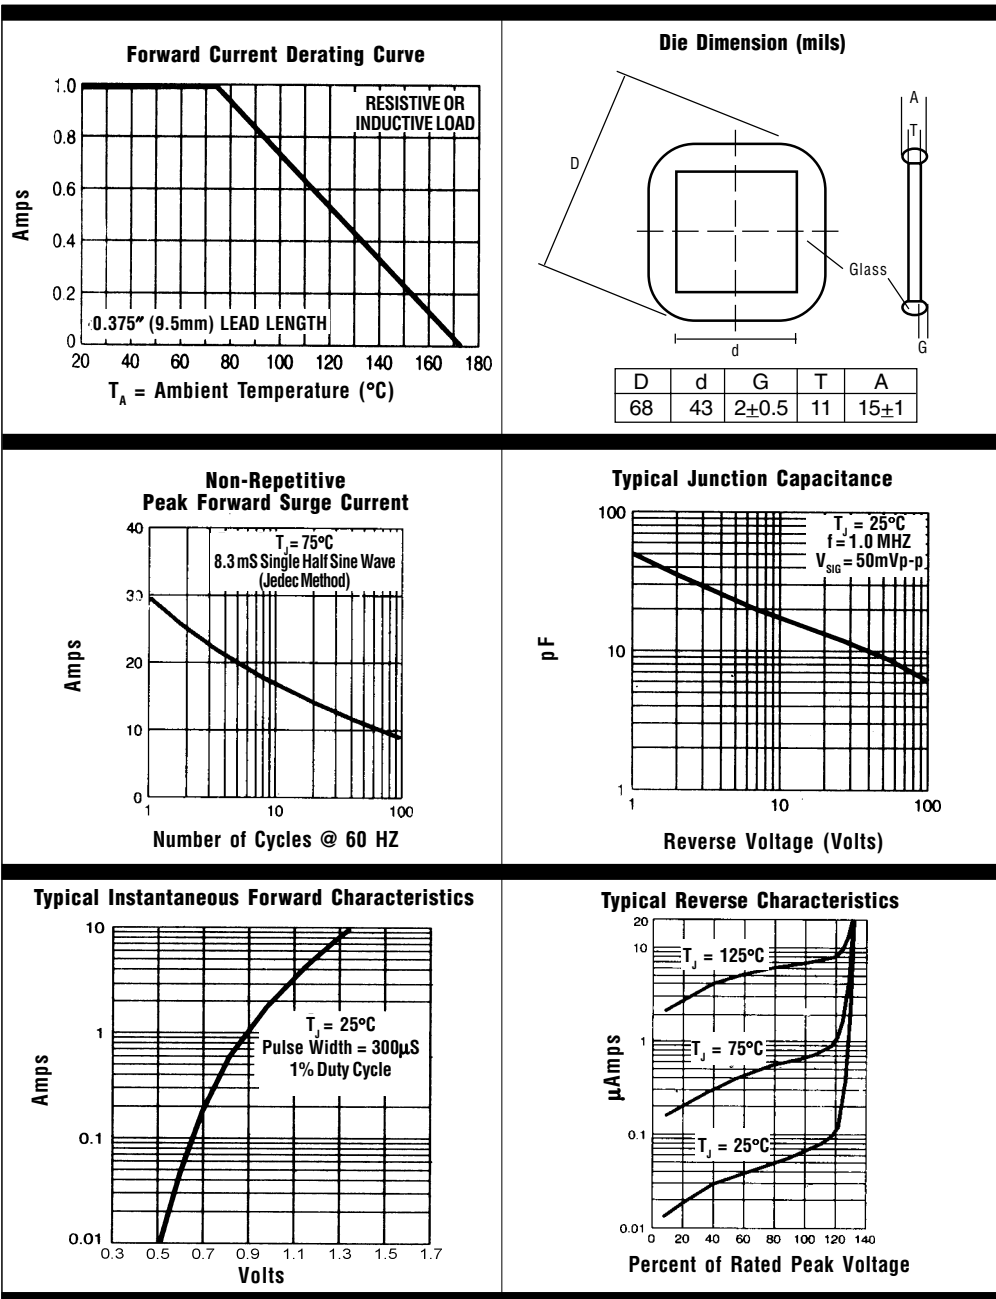

Ratings at 25 Deg. C ambient temperature unless otherwise specified.

Single Phase Half Wave, 60 HZ Resistive or Inductive Load.

For Capacitive Load, Derate Current by 20%.

- NOTES:**
1. Measured @ 1 MHz and applied reverse voltage of 4.0V.
  2. Thermal Resistance from Junction to Ambient at 3/8" Lead Length, P.C. Board Mounted.
  3. Reverse Recovery Condition  $I_F = 0.5\text{A}$ ,  $I_R = 1.0\text{A}$ ,  $I_{RR} = 0.25\text{A}$ .