

## GQ2123

### CMOS Positive Voltage Regulator

#### Description

The GQ2123 series of positive, linear regulators feature low quiescent current (30 $\mu$ A typ.) with low dropout voltage, making them ideal for battery applications.

These rugged devices have both Thermal Shutdown, and Current Fold-back to prevent device failure under the "Worst" of operating conditions.

In applications requiring a low noise, regulated supply, place a 1000pF capacitor between Bypass and Ground. The GQ2123 is stable with an output capacitance of 2.2 $\mu$ F or greater.


#### Features

- Very Low Dropout Voltage
- Guaranteed 300mA output
- Over-Temperature Shutdown
- Current Limiting
- Short Circuit Current Fold-back
- Highly Accurate  $\pm 1.5\%$
- Noise Reduction Bypass Capacitor
- Power-saving Shutdown Mode
- Factor Pre-set Output Voltage


#### Applications

- Battery Powered Widgets
- Instrumentation
- Wireless Devices
- PC Peripherals
- Portable Electronics
- Cordless Phones
- Electronic Scales

#### Package Dimensions

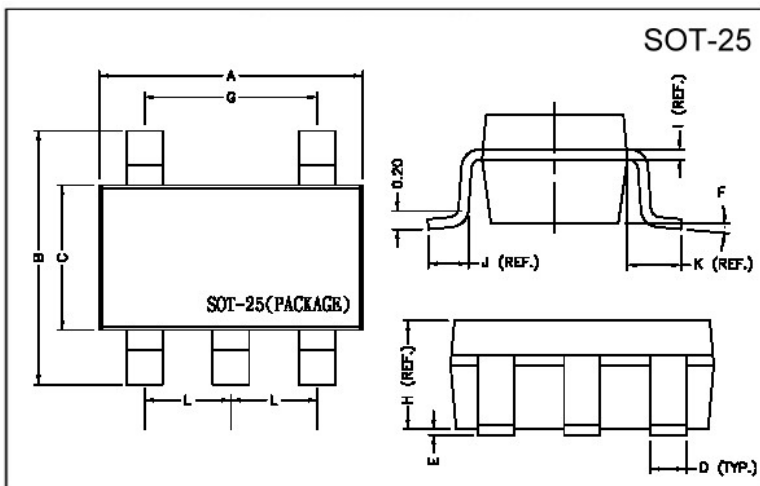


#### Marking :

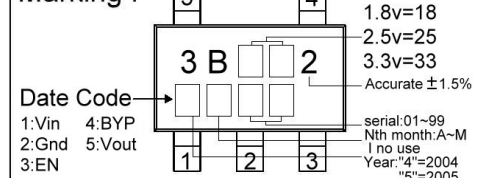

| REF. | Millimeter |      | REF. | Dimensions |  |
|------|------------|------|------|------------|--|
|      | Min.       | Max. |      | Millimeter |  |
| A    | 2.70       | 3.10 | G    | 1.90 REF.  |  |
| B    | 2.60       | 3.00 | H    | 1.20 REF.  |  |
| C    | 1.40       | 1.80 | I    | 0.12 REF.  |  |
| D    | 0.30       | 0.55 | J    | 0.37 REF.  |  |
| E    | 0          | 0.10 | K    | 0.60 REF.  |  |
| F    | 0°         | 10°  | L    | 0.95 REF.  |  |

#### Typical Application Circuit

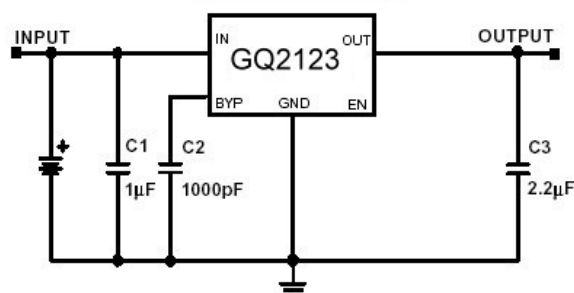

**Absolute Maximum Ratings**

| Parameter                     | Symbol             | Ratings                                              | Unit |
|-------------------------------|--------------------|------------------------------------------------------|------|
| Input Max Voltage             | V <sub>IN</sub>    | 8                                                    | V    |
| Output Current                | I <sub>OUT</sub>   | P <sub>D</sub> /( V <sub>IN</sub> - V <sub>O</sub> ) | mA   |
| Output Voltage                | V <sub>OUT</sub>   | 1.5~5.0                                              | V    |
| Operating Ambient Temperature | T <sub>opr</sub>   | -40 ~ +85                                            | °C   |
| Junction Temperature          | T <sub>j</sub>     | -40 ~ +125                                           | °C   |
| Maximum Junction Temperature  | T <sub>j</sub> Max | 150                                                  | °C   |
| Power Dissipation(ΔT=100°C)   | PD                 | 380                                                  | mW   |
| EDS Classification            |                    | B                                                    |      |

**Electrical Characteristics Ta=25°C unless otherwise noted**

| Parameter                              | Symbol                         | Condition                                                                                   | Min                               | TYP                            | Max             | Unit   |
|----------------------------------------|--------------------------------|---------------------------------------------------------------------------------------------|-----------------------------------|--------------------------------|-----------------|--------|
| Output Voltage                         | V <sub>OUT(E)</sub><br>(Note1) | V <sub>IN</sub> =V <sub>OUT(T)</sub> +2V, I <sub>O</sub> =1mA                               | -1.5%                             | V <sub>OUT(T)</sub><br>(Note2) | 1.5%            | V      |
|                                        |                                | V <sub>IN</sub> =V <sub>OUT(T)</sub> +2V, I <sub>O</sub> =300mA                             | -2.5%                             |                                | 2.5%            | V      |
| Output Current                         | I <sub>O</sub>                 | V <sub>IN</sub> =V <sub>OUT(T)</sub> +2V, V <sub>OUT</sub> ≥ V <sub>OUT(E)</sub> *0.96      | 300                               | -                              | -               | mA     |
| Current Limit                          | I <sub>LM</sub>                | V <sub>IN</sub> =V <sub>OUT(T)</sub> +2V, V <sub>O</sub> >1.2V                              | 300                               | 450                            | -               | mA     |
| Load Regulation                        | REG <sub>LOAD</sub>            | V <sub>IN</sub> =V <sub>OUT(T)</sub> +2V, I <sub>O</sub> =1mA to 300mA                      | -1                                | 0.2                            | 1               | %      |
| Dropout Voltage                        | V <sub>DROPOUT</sub>           | I <sub>O</sub> =300mA<br>V <sub>O</sub> =V <sub>OUT(E)</sub> -2%                            | 1.2V ≤ V <sub>OUT(T)</sub> ≤ 2.0V | -                              | -               | 1300   |
|                                        |                                |                                                                                             | 2.0V < V <sub>OUT(T)</sub> ≤ 2.8V | -                              | -               | 400    |
|                                        |                                |                                                                                             | 2.8V < V <sub>OUT(T)</sub>        | -                              | -               | 300    |
| Quiescent Current                      | I <sub>Q</sub>                 | V <sub>IN</sub> = V <sub>OUT(T)</sub> +1V, I <sub>O</sub> =0mA                              | -                                 | 30                             | 50              | μA     |
| Ground Pin Current                     | I <sub>GND</sub>               | V <sub>IN</sub> = V <sub>OUT(T)</sub> +2V, I <sub>O</sub> =1mA~300mA                        | -                                 | 35                             | -               | μA     |
| Line Regulation                        | REG <sub>LINE</sub>            | I <sub>O</sub> =1mA<br>V <sub>IN</sub> =V <sub>OUT(T)</sub> +1 to<br>V <sub>OUT(T)</sub> +2 | 1.2V ≤ V <sub>OUT(T)</sub> ≤ 1.4V | -0.2                           | -               | 0.2    |
|                                        |                                |                                                                                             | 1.4V < V <sub>OUT(T)</sub> ≤ 2.0V | -0.15                          | -               | 0.15   |
|                                        |                                |                                                                                             | 2.0V < V <sub>OUT(T)</sub> < 4.0V | -0.1                           | 0.02            | 0.1    |
|                                        |                                |                                                                                             | 4.0V ≤ V <sub>OUT(T)</sub>        | -0.4                           | 0.2             | 0.4    |
| Input Voltage                          | V <sub>IN</sub>                |                                                                                             | Note3                             | -                              | 7               | V      |
| Over Temperature Shutdown              | OTS                            |                                                                                             | -                                 | 150                            | -               | °C     |
| Over Temperature Hysteresis            | OTH                            |                                                                                             | -                                 | 30                             | -               | °C     |
| Output Voltage Temperature Coefficient | TC                             |                                                                                             | -                                 | 30                             | -               | ppm/°C |
| Short Circuit Current(Note4)           | I <sub>SC</sub>                | V <sub>IN</sub> =V <sub>OUT(T)</sub> +1V, V <sub>OUT</sub> <0.8V                            | -                                 | 150                            | 300             | mA     |
| Power Supply Rejection                 | PSRR                           | I <sub>O</sub> =100mA<br>C <sub>O</sub> =2.2μF                                              | f=100Hz                           | -                              | 60              | -      |
|                                        |                                |                                                                                             | f=1kHz                            | -                              | 50              | -      |
|                                        |                                |                                                                                             | f=10kHz                           | -                              | 20              | -      |
| Output Voltage Noise                   | e <sub>N</sub>                 | f=10Hz~100kHz<br>I <sub>O</sub> =10mA                                                       | C <sub>O</sub> =2.2μF             | -                              | 30              | -      |
| EN Input Threshold                     | V <sub>EH</sub>                | V <sub>IN</sub> =2.7V to 7V                                                                 | 2.0                               | -                              | V <sub>IN</sub> | V      |
|                                        | V <sub>EL</sub>                | V <sub>IN</sub> =2.7V to 7V                                                                 | 0                                 | -                              | 0.4             | V      |
| EN Input Bias Current                  | I <sub>EH</sub>                | V <sub>EN</sub> =V <sub>IN</sub> , V <sub>IN</sub> =2.7V to 7V                              | -                                 | -                              | 0.1             | μA     |
|                                        | I <sub>EL</sub>                | V <sub>EN</sub> = 0V, V <sub>IN</sub> =2.7V to 7V                                           | -                                 | -                              | 0.5             | μA     |
| Shutdown Supply Current                | I <sub>SD</sub>                | V <sub>IN</sub> =5V, V <sub>O</sub> =0V, V <sub>EN</sub> <V <sub>EL</sub>                   | -                                 | 0.5                            | 1               | μA     |
| Shutdown Output Voltage                | V <sub>O,SD</sub>              | I <sub>O</sub> =0.4mA, V <sub>EN</sub> <V <sub>EL</sub>                                     | 0                                 | -                              | 0.4             | V      |

Note 1: V<sub>OUT(E)</sub> =Effective Output Voltage (i.e. the output voltage when "V<sub>OUT(T)</sub> + 2.0V" is provided at the V<sub>IN</sub> pin while maintaining a certain I<sub>OUT</sub> value).

2: V<sub>OUT(T)</sub> =Specified Output Voltage





3: V<sub>IN(MIN)</sub> =V<sub>OUT</sub>+V<sub>DROPOUT</sub>







4: To prevent the Short Circuit Current protection feature from being prematurely activated, the input voltage must be applied before a current source load is applied.







## Ordering Information ( contd. )







| Part Number | Marking       | Output Voltage | Part Number | Marking       | Output Voltage |
|-------------|---------------|----------------|-------------|---------------|----------------|
| GQ2123-15   | 3B152<br>XXXX | 1.5V           | GQ2123-18   | 3B182<br>XXXX | 1.8V           |
| GQ2123-25   | 3B252<br>XXXX | 2.5V           | GQ2123-27   | 3B272<br>XXXX | 2.7V           |
| GQ2123-28   | 3B282<br>XXXX | 2.8V           | GQ2123-29   | 3B292<br>XXXX | 2.9V           |
| GQ2123-30   | 3B302<br>XXXX | 3.0V           | GQ2123-31   | 3B312<br>XXXX | 3.1V           |
| GQ2123-33   | 3B332<br>XXXX | 3.3V           | GQ2123-34   | 3B342<br>XXXX | 3.4V           |
| GQ2123-35   | 3B352<br>XXXX | 3.5V           | GQ2123-36   | 3B362<br>XXXX | 3.6V           |
| GQ2123-37   | 3B372<br>XXXX | 3.7V           | GQ2123-38   | 3B382<br>XXXX | 3.8V           |
| GQ2123-50   | 3B502<br>XXXX | 5.0V           | GQ2123-2H   | 3B2H2<br>XXXX | 2.85V          |



## Characteristics Curve

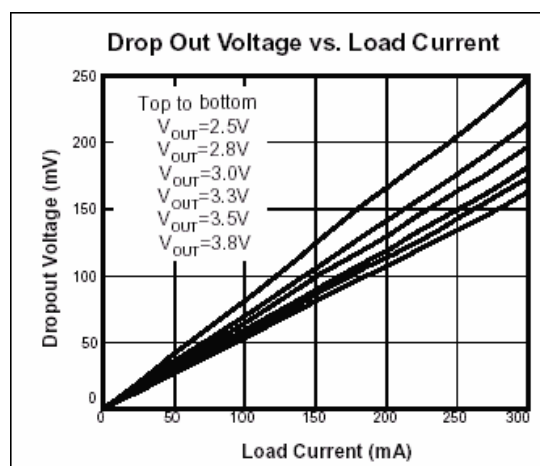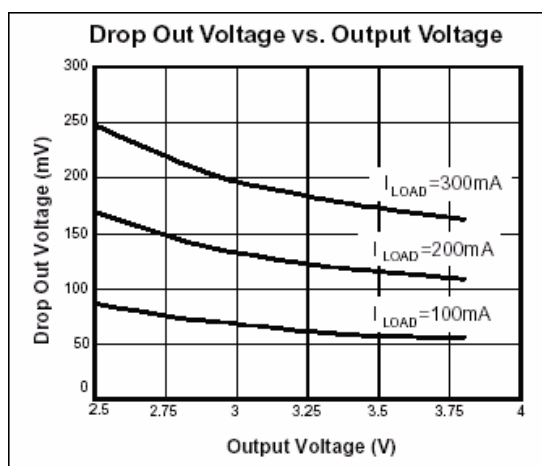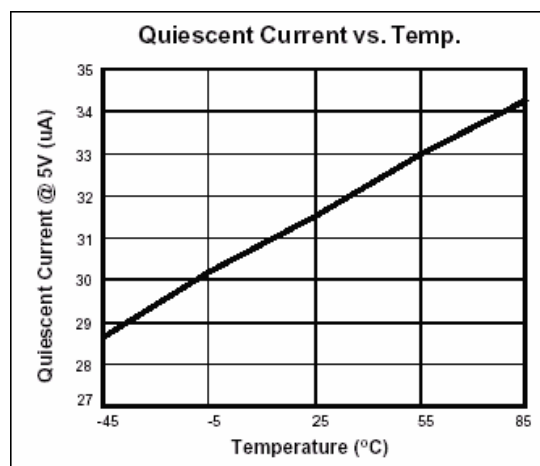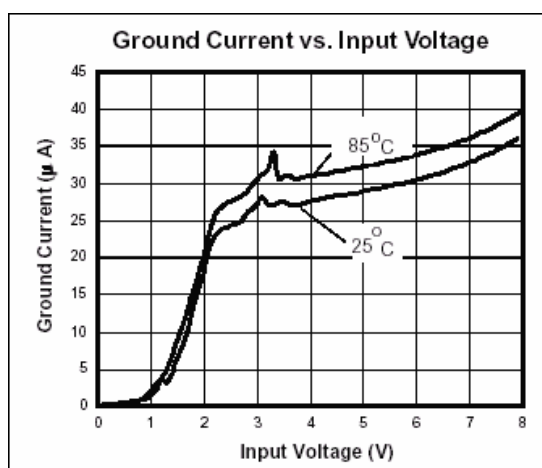

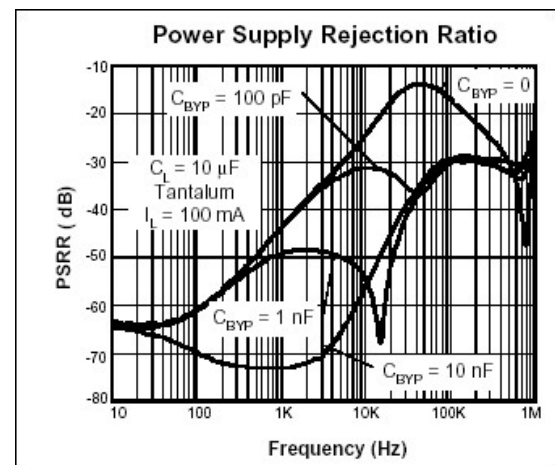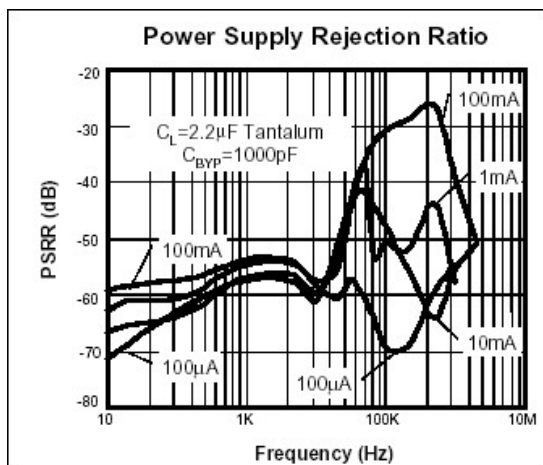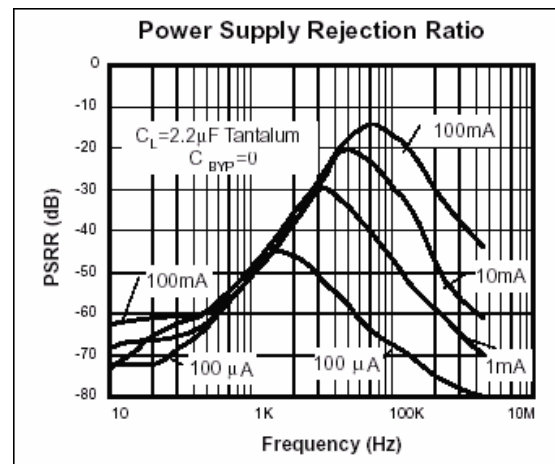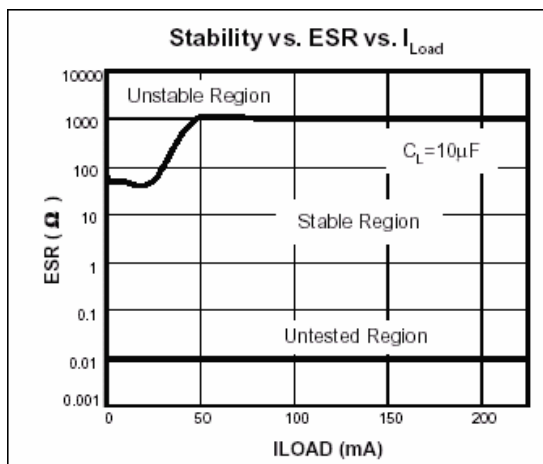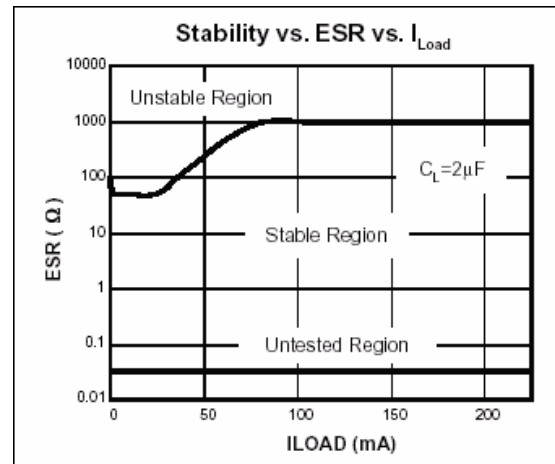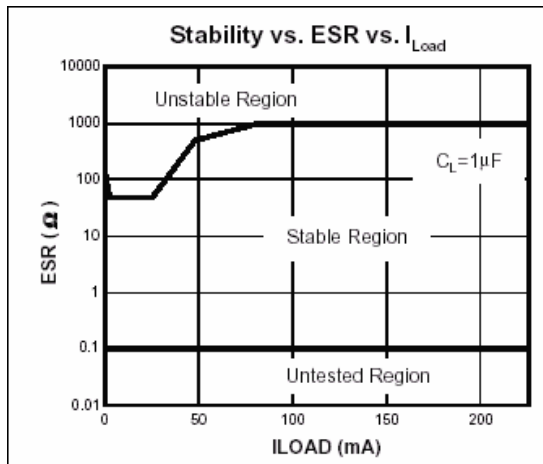

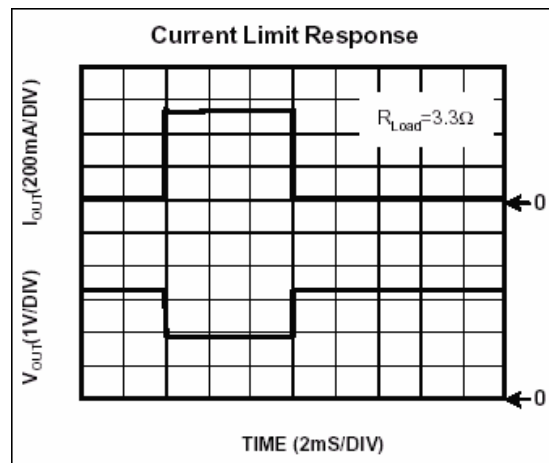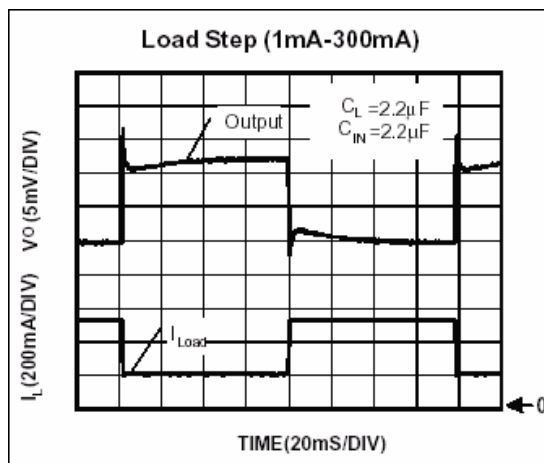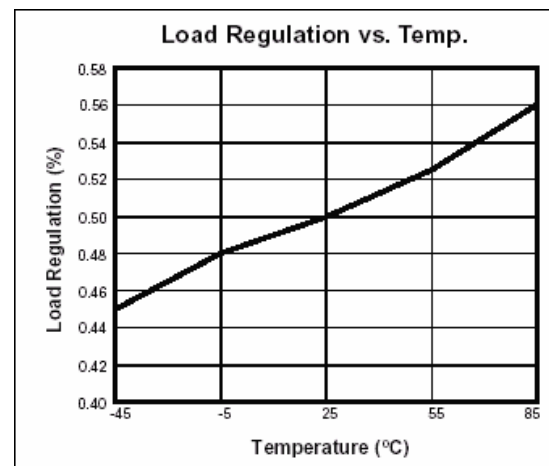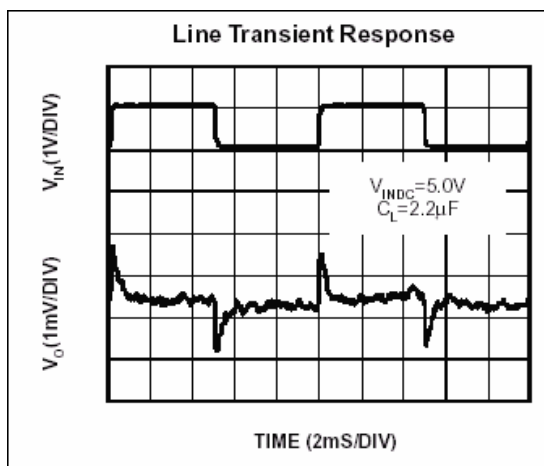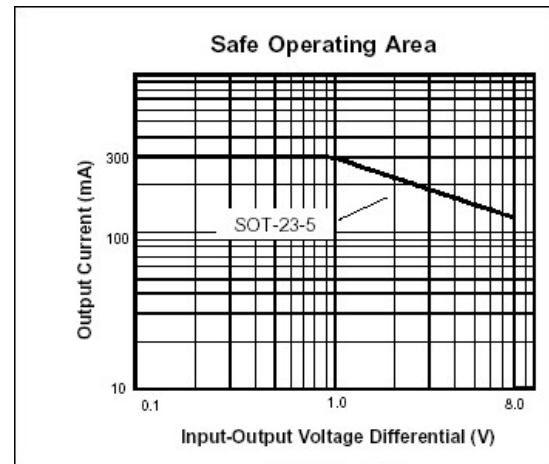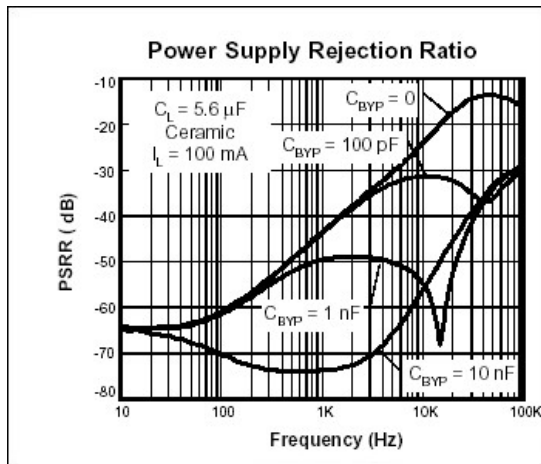

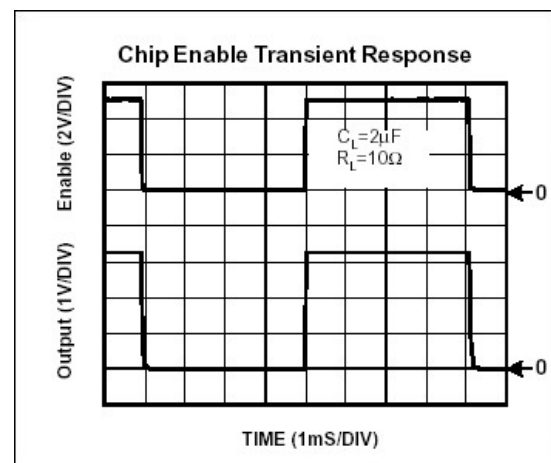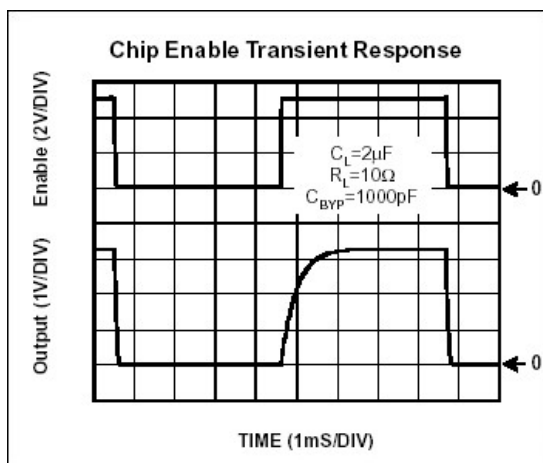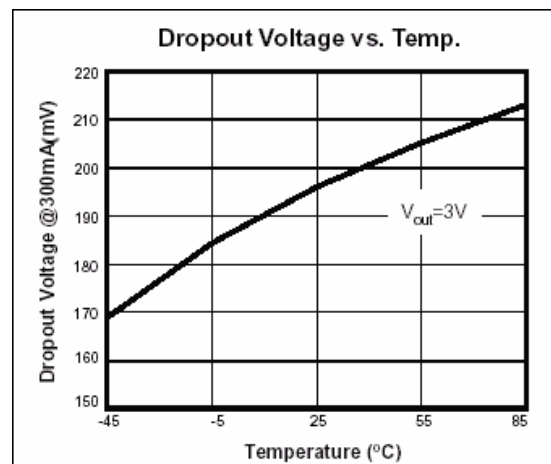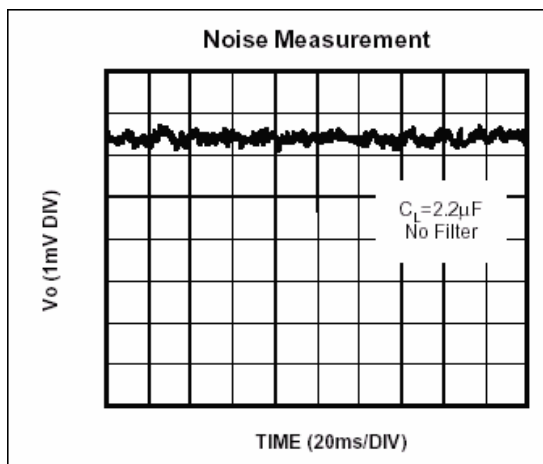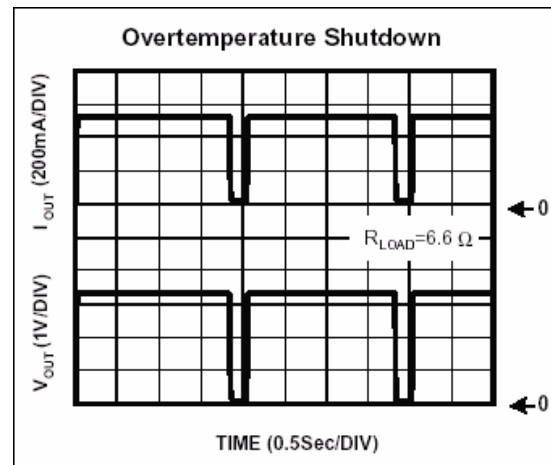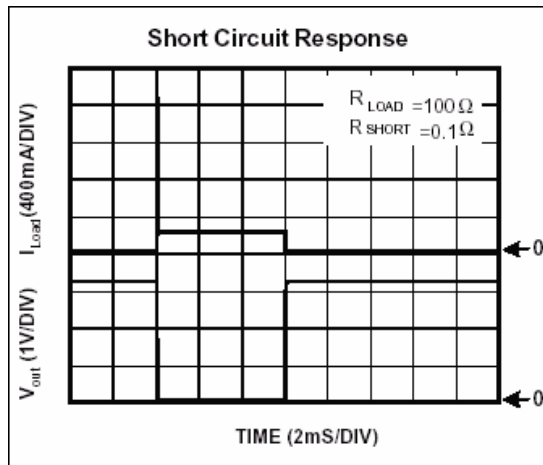

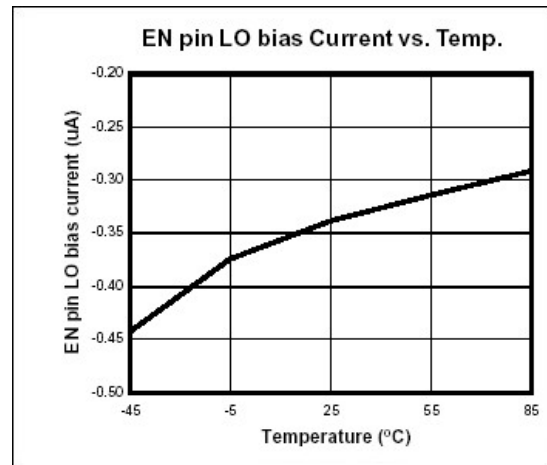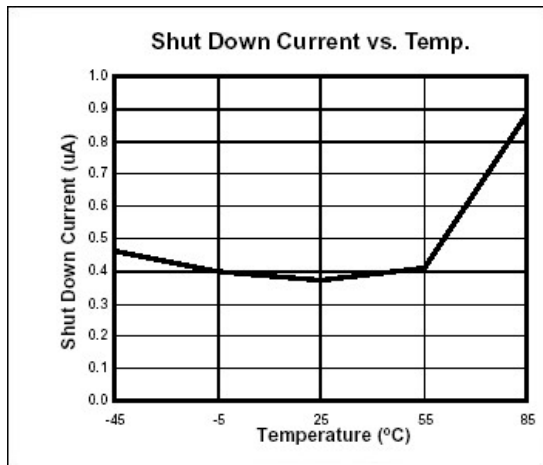

## Detailed Description

The GQ2123 series of COMS regulators contain a PMOS pass transistor, voltage reference, error amplifier, over-current protection, and thermal shutdown.

The P-channel pass transistor receives data from the error amplifier, over-current shutdown, and thermal protection circuits. During normal operation, the error amplifier compares the output voltage to a precision reference. Over-current and Thermal shutdown circuits become active when the junction temperature exceeds 150°C, or the current exceeds 300mA. During thermal shutdown, the output voltage remains low. Normal operation is restored when the junction temperature drops below 120°C.

The GQ2123 switches from voltage mode to current mode when the load exceeds the rated output current. This prevents over-stress. The GQ2123 also incorporates current fold-back to reduce power dissipation when the output is short circuited. This feature becomes active when the output drops below 0.8 volts, and reduces the current flow by 65%. Full current is restored when the voltage exceeds 0.8 volts.

## External Capacitors

The GQ2123 is stable with an output capacitance to ground of 2.2μF or greater. Ceramic capacitors have the lowest ESR, and will offer the best AC performance. Conversely, Aluminum Electrolytic capacitors exhibit the highest ESR, resulting in the poorest AC response. Unfortunately, large value ceramic capacitors are comparatively expensive. One option is to parallel a 0.1μF ceramic capacitor with a 10μF Aluminum Electrolytic. The benefit is low ESR, high capacitance, and low overall cost.

A second capacitor is recommended between the input and ground to stabilize Vin. The input capacitor should be at least 0.1μF to have a beneficial effect.

A third capacitor can be connected between the BY-PASS pin and GND. This capacitor can be a low cost Polyester Film variety between the value of 0.001~0.01μF. A large capacitor improves the AC ripple rejection, but also makes the output come up slowly. This "Soft" turn-on is desirable in some applications to limit turn-on surges.

All capacitors should be placed in close proximity to the pins. A "Quiet" ground termination is desirable. This can be achieved with a "Star" connection.

## Enable

The Enable pin normally floats high. When actively, pulled low, the PMOS pass transistor shuts off, and all internal circuits are powered down. In this state, the quiescent current is less than 1μA. This pin behaves much like an electronic switch.

### Important Notice:

- All rights are reserved. Reproduction in whole or in part is prohibited without the prior written approval of GTM.
- GTM reserves the right to make changes to its products without notice.
- GTM semiconductor products are not warranted to be suitable for use in life-support Applications, or systems.
- GTM assumes no liability for any consequence of customer product design, infringement of patents, or application assistance.

### Head Office And Factory:

- **Taiwan:** No. 17-1 Tatung Rd. Fu Kou Hsin-Chu Industrial Park, Hsin-Chu, Taiwan, R. O. C.  
TEL: 886-3-597-7061 FAX: 886-3-597-9220, 597-0785
- **China:** (201203) No.255, Jang-Jiang Tsai-Lueng RD. , Pu-Dung-Hsin District, Shang-Hai City, China  
TEL: 86-21-5895-7671 ~ 4 FAX: 86-21-38950165