

Silicon Rectifier

1A 50~1KV DO-214AC (SMA)

GS1A-GS1M

MERITEK

FEATURES

- Peak Surge Overload Rating: 30A
- Low profile package
- Low forward voltage drop
- Glass passivated Die construction
- Terminals: Solder plated, solderable per MIL-STD-750
- UL Flammability Classification 94V-O




ELECTRICAL CHARACTERISTICS

Parameter		Symbol	GS1A	GS1B	GS1D	GS1G	GS1J	GS1K	GS1M	Unit
Maximum Recurrent Peak Reverse Voltage		V _{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS Voltage		V _{RMS}	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage		V _{DC}	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current at T _L =100°C		I _(AV)	1.0							A
Peak Forward Surge Current, 8.3ms single half-sine-wave superimposed on rated load (JEDEC method)		I _{FSM}	30							A
Maximum Forward Voltage at 1.0A		V _F	1.1							V
Maximum Reverse Current at Rated DC Blocking Voltage	T _A =25°C	I _R	5.0							μA
	T _A =125°C		100							
Typical Junction Capacitance		C _J	12							pF
Typical Thermal Resistance- Junction to Ambient		R _{θJA}	50							°C/W
Maximum Reverse Recovery Time		T _{RR}	2.5							μs
Operating Junction Temperature Range		T _J	-65 to +150							°C
Storage Temperature Range		T _{STG}	-65 to +175							°C

- Note
1. Ratings at 25°C ambient temperature unless otherwise specified.
 2. Single phase, half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%.
 3. Measured at 1 MHz and applied reverse voltage of 4.0 VDC.
 4. Thermal resistance from junction to lead mounted on P.C.B. with $0.3 \times 0.3"$ (8.0 x 8.0mm) copper pad areas
 5. Reverse Recovery Test Conditions: $I_F=.5\text{A}$, $I_R=1\text{A}$, $I_{RR}=.25\text{A}$.

DIMENSIONS

Item	DO-214AC (SMA)	
	Min. (mm)	Max. (mm)
A	2.180	2.900
B	4.000	4.600
C	1.230	1.700
D	0.152	0.305
E	4.700	5.310
G	0.000	0.203
H	0.760	1.520
J	1.700	2.440

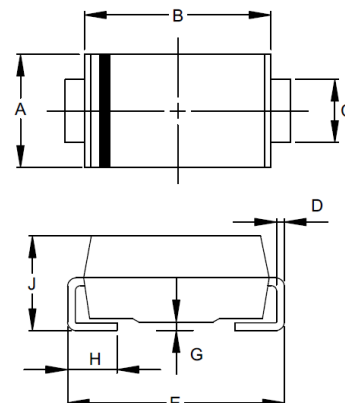

Silicon Rectifier

1A 50~1KV DO-214AC (SMA)

GS1A-GS1M	MERITEK
-----------	---------

CHARACTERISTIC CURVES

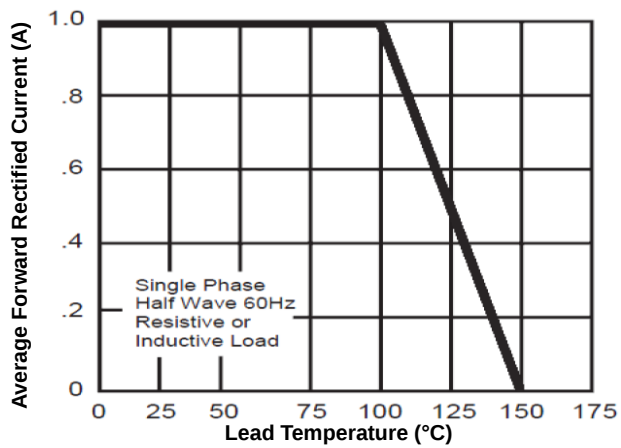


Fig1. Typical Forward Current Derating Curve

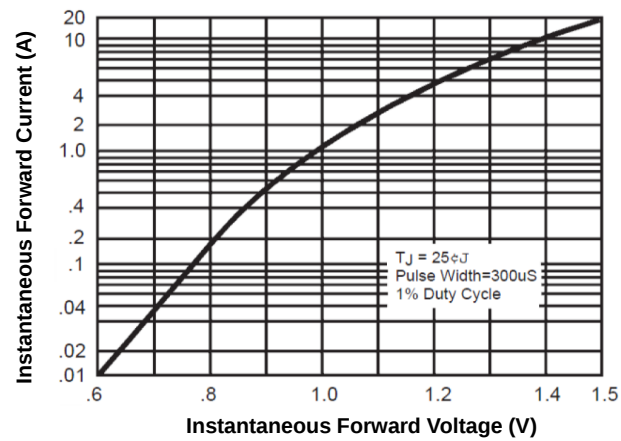


Fig2. Typical Instantaneous Forward Characteristics

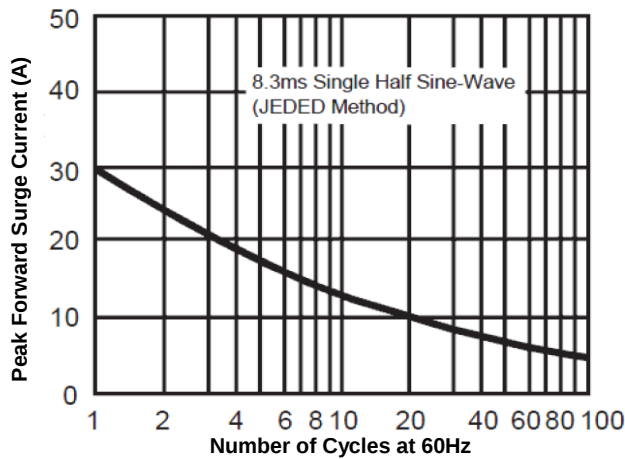


Fig3. Maximum Non-Repetitive Forward Surge Current

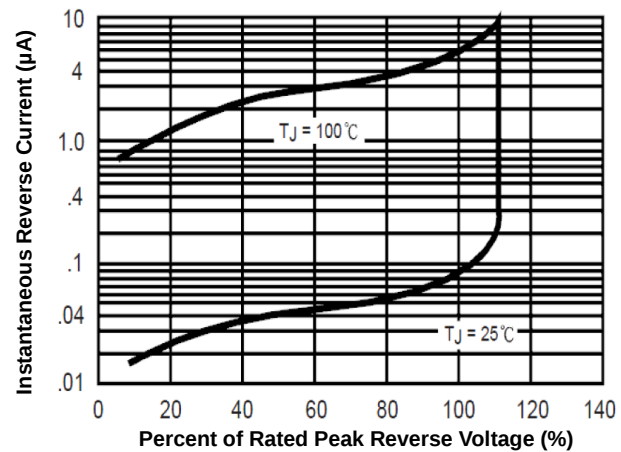


Fig4. Typical Reverse Characteristics

*Specifications subject to change without notice