



## Features

- High speed
- Suitable for high packing density layout
- High reliability



SOT-523



Schematic Diagram





## Absolute Maximum Ratings ( $T_A=25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Value	Unit
Non-Repetitive Peak Reverse Voltage	$V_{RM}$	80	V
DC Blocking Voltage	$V_R$	80	V
Forward Continuous Current	$I_{FM}$	300	mA
Non-Repetitive Peak Forward Surge Current @ $t=8.3\text{ms}$	$I_{FSM}$	2.0	A
Average Rectified Output Current	$I_o$	100	mA
Power Dissipation	$P_D$	150	mW
Thermal Resistance From Junction to Ambient	$R_{\theta JA}$	833	°C/W
Junction Temperature	$T_J$	150	°C
Storage Temperature Range	$T_{STG}$	-55 to +150	°C


## Electrical Characteristics ( $T_A=25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Test conditions	Min	Max	Unit
Reverse Breakdown Voltage	$V_{(BR)}$	$I_R=100\mu\text{A}$	80	-	V
Reverse Voltage Leakage Current	$I_R$	$V_R=70\text{V}$	-	0.1	$\mu\text{A}$
Forward Voltage	$V_F$	$I_F=100\text{mA}$	-	1.2	V
Diode Capacitance	$C_D$	$V_R=0, f=1\text{MHz}$	-	3.5	pF
Reverse Recovery Time	$t_{rr}$	$V_R=6\text{V}, I_F=I_R=5\text{mA}$	-	4	ns

## Typical Characteristics Curves

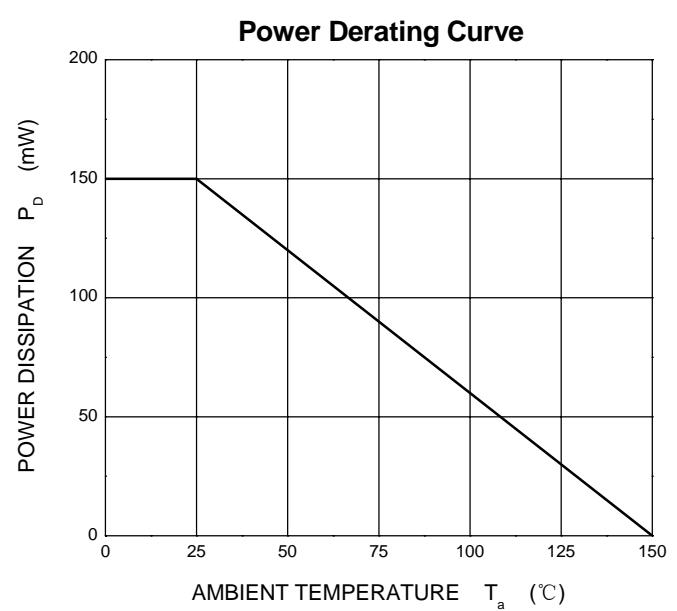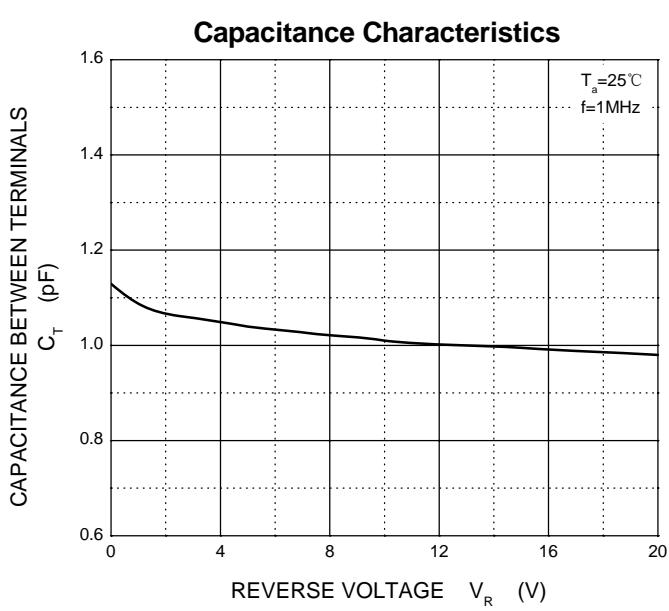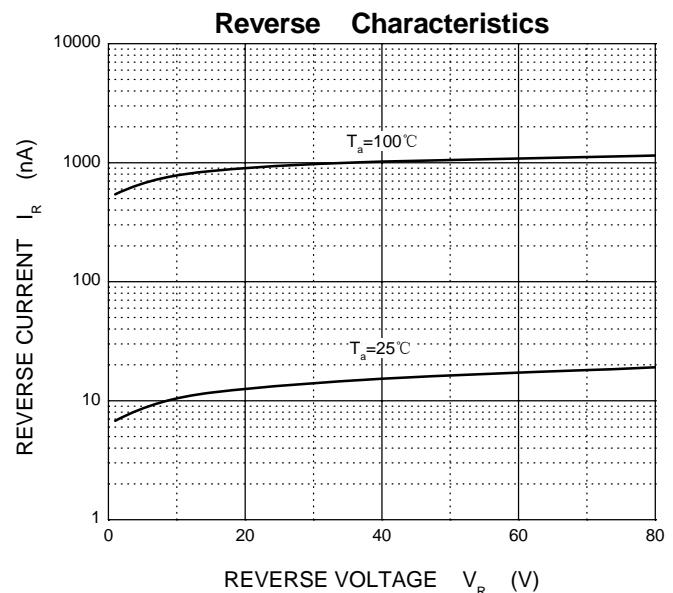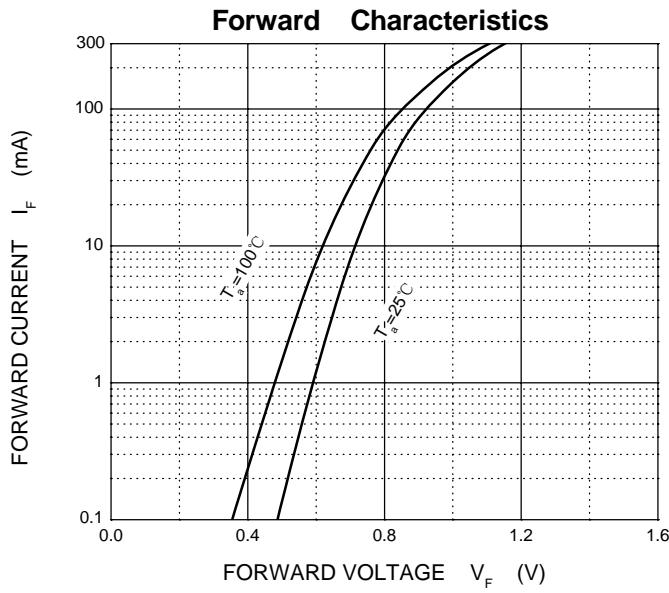


## Package Outline Dimensions SOT-523

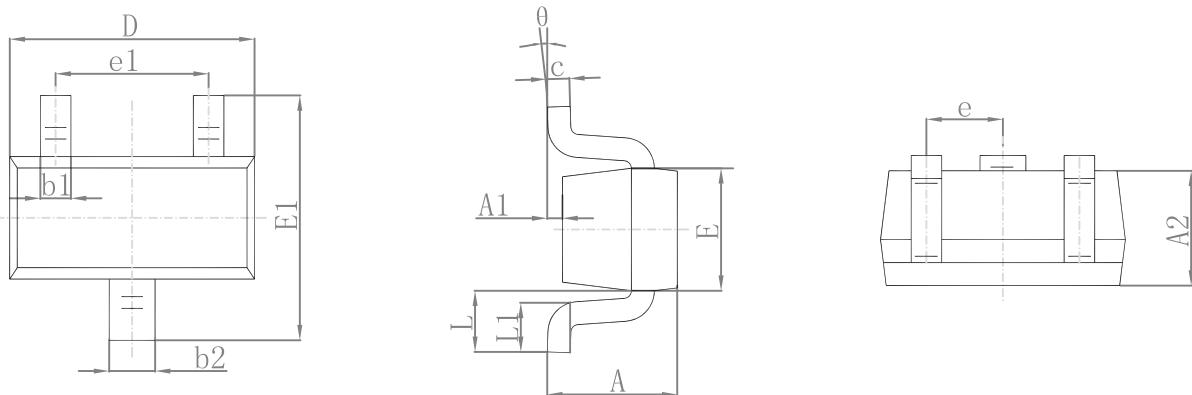

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	0.700	0.900	0.028	0.035
A1	0.000	0.100	0.000	0.004
A2	0.700	0.800	0.028	0.031
b1	0.150	0.250	0.006	0.010
b2	0.250	0.350	0.010	0.014
c	0.100	0.200	0.004	0.008
D	1.500	1.700	0.059	0.067
E	0.700	0.900	0.028	0.035
E1	1.450	1.750	0.057	0.069
e	0.500 TYP.		0.020 TYP.	
e1	0.900	1.100	0.035	0.043
L	0.400 REF.		0.016 REF.	
L1	0.260	0.460	0.010	0.018
θ	0°	8°	0°	8°

## Suggested Pad Layout



### Note:

1. Controlling dimension: in millimeters.
2. General tolerance:  $\pm 0.05$ mm.
3. The pad layout is for reference purposes only.

## Order Information

Device	Package	Marking	Carrier	Quantity	HSF Status
GSDAN222	SOT-523	N	Tape & Reel	3000pcs / Reel	RoHS compliant