

GSDBAV70

Monolithic Dual Switching Diode Common Anode


Product Description

Switching Diode 200mA / 75V

Features

- Low forward voltage
- For high-speed switching applications
- Halogen-free parts


Packages



Marking Information

Part Number	Package	Part Marking
GSDBAV70F	SOT- 23	A4

Ordering Information

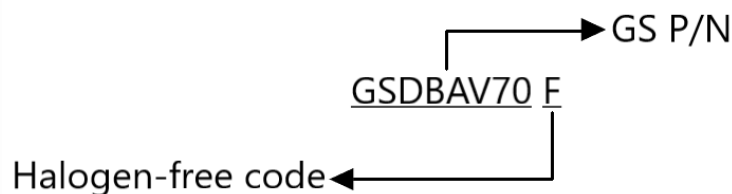

Part Number	Package	Quantity
GSDBAV70F	SOT- 23	3000 PCS

Maximum Ratings

(T_A=25°C Unless otherwise noted)





Symbol	Conditions	Value	Unit
V _{RRM}	Repetitive Peak Reverse Voltage	100	V
V _R	Reverse Voltage	75	V
I _F	Forward Current	200	mA
I _{FSM}	Peak Forward Surge Current, t = 1s t = 1μs	1 2	A
P _D	Total Power Dissipation(Note1)	350	mW
T _J	Junction Temperature	150	°C
T _{STG}	Storage Temperature Range	-55 to +150	°C

Electrical Characteristics


(T_A=25°C Unless otherwise noted)

Symbol	Conditions	Max	Unit
V _F	Forward Voltage (I _F =1.0mA)	715	mV
	(I _F =10mA)	855	
	(I _F =50mA)	1000	
	(I _F =150mA)	1250	
I _R	Reverse Current , V _R =25V	30	nA
	Reverse Current , V _R =75V	2.5	μA
	Reverse Current , (V _R =25V, T _J =150°C)	60	
	Reverse Current , (V _R =75V, T _J =150°C)	100	
C _d	Diode Capacitance (V _R =0V, f=1.0MHz),	2	pF
T _{rr}	Reverse Recovery Time I _F =10mA, V _R =6V , I _{rr} =1mA, R _L =100Ω	4	ns

Typical Characteristics

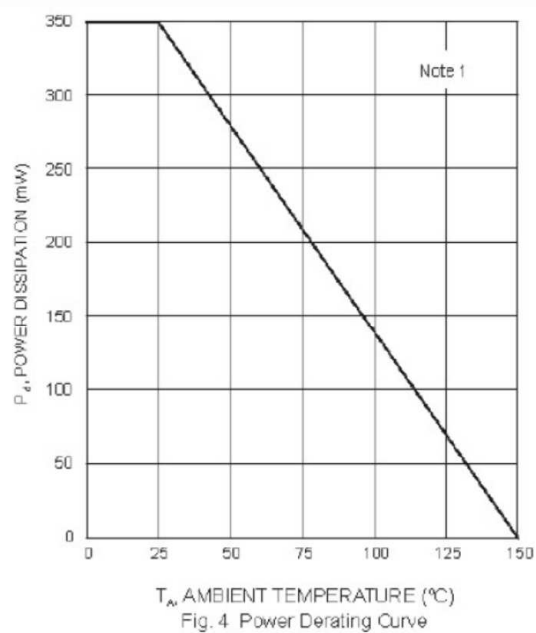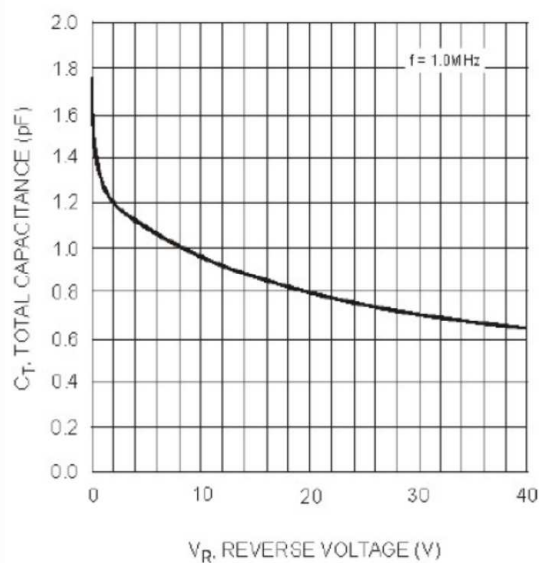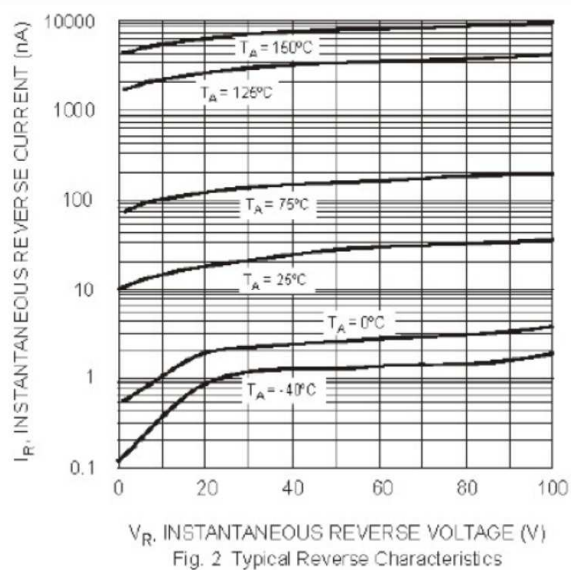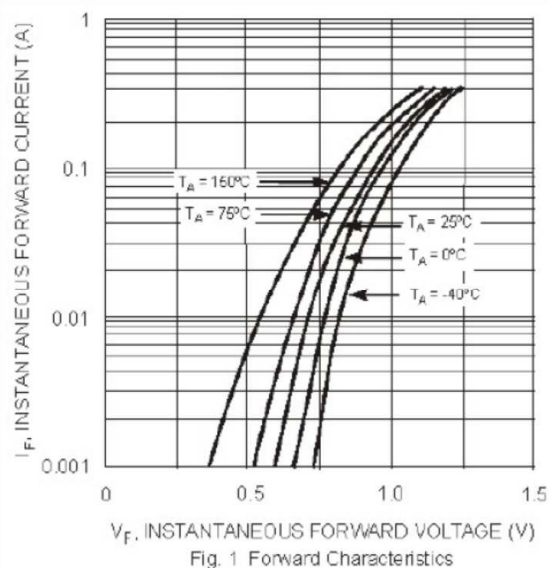

Package Dimension

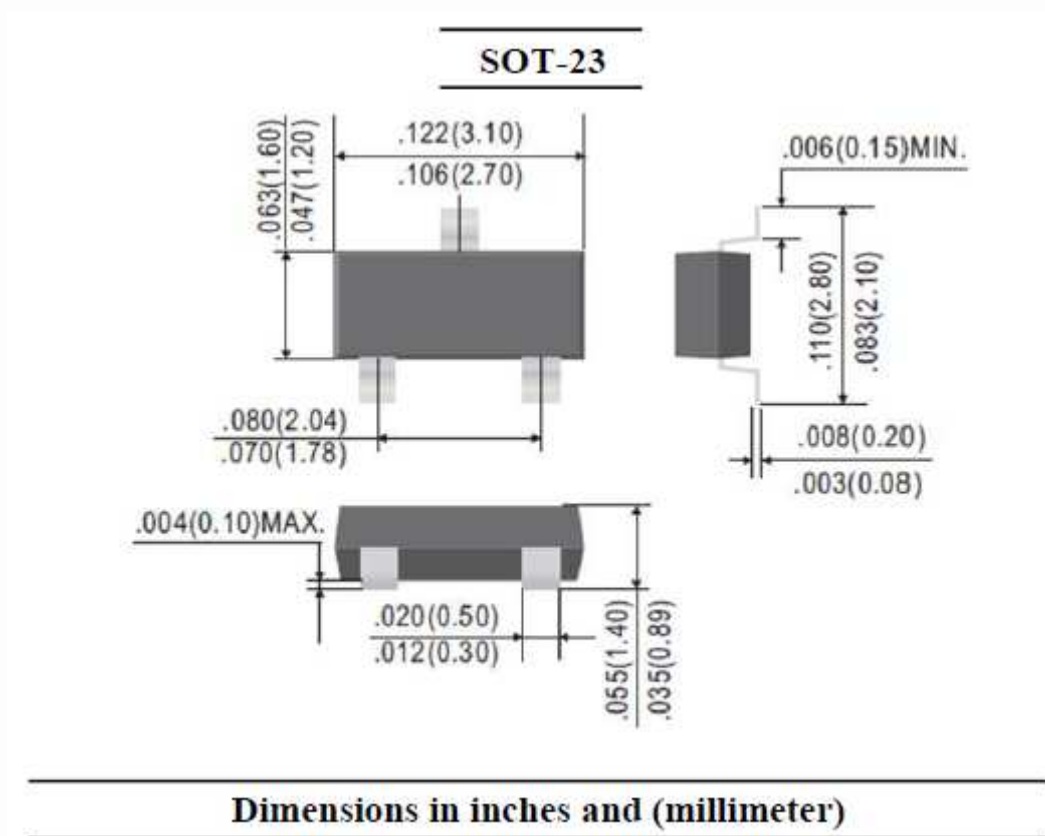

NOTICE

Information furnished is believed to be accurate and reliable. However Globaltech Semiconductor assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties, which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Globaltech Semiconductor. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information without express written approval of Globaltech Semiconductor.

CONTACT US

GS Headquarter	
	4F.,No.43-1,Lane11,Sec.6,Minquan E.Rd Neihs District Taipei City 114, Taiwan (R.O.C)
	886-2-2657-9980
	886-2-2657-3630
	sales_twn@gs-power.com

RD Division	
	824 Bolton Drive Milpitas. CA. 95035
	1-408-457-0587