

GSM3385ZF

30V P-Channel MOSFETs

Product Description

These P-Channel enhancement mode power field effect transistors are using trench DMOS technology. This advanced technology has been especially tailored to minimize on-state resistance, provide superior switching performance, and withstand high energy pulse in the avalanche and commutation mode.

These devices are well suited for high efficiency fast switching applications.


Features


- -30V, -40A, $R_{DS(ON)} < 8.5m\Omega @ V_{GS} = -10V$
- Fast switching
- Suit for -4.5V Gate Drive Applications
- Green Device Available
- DFN3X3-8L package design

Applications


- MB / VGA / Vcore
- POL Applications
- Load Switch
- LED Application

Packages & Pin Assignments

GSM3385ZF (DFN3X3-8L)	
 <p>Top View</p>	
Pin	Description
1	Source
2	Source
3	Source
4	Gate
5	Drain
6	Drain
7	Drain
8	Drain

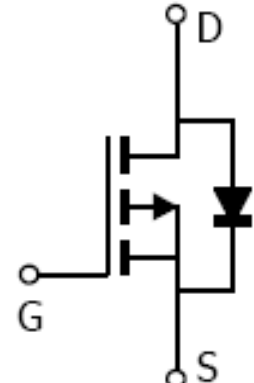


Ordering Information

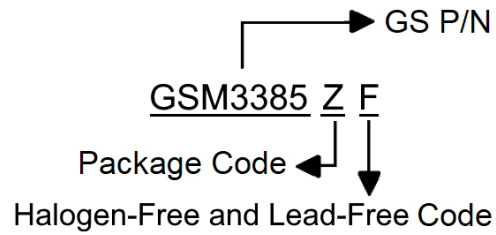

Part Number	Package	Quantity Reel
GSM3385ZF	DFN3X3-8L	5000 PCS

Marking Information

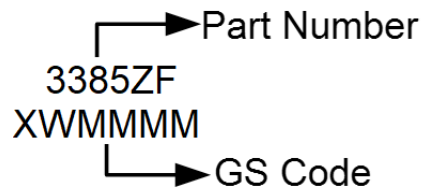

Absolute Maximum Ratings

$T_C=25^{\circ}\text{C}$ Unless otherwise noted

Symbol	Parameter	Typical	Unit
V_{DS}	Drain-Source Voltage	-30	V
V_{GS}	Gate-Source Voltage	± 25	V
I_D	Continuous Drain Current	$T_C=25^{\circ}\text{C}$	-40
		$T_C=100^{\circ}\text{C}$	-25
I_{DM}	Pulsed Drain Current ¹	-128	A
P_D	Power Dissipation	$T_C=25^{\circ}\text{C}$	21
		$T_C=100^{\circ}\text{C}$	8.3
T_J	Operating Junction Temperature Range	-55 to +150	$^{\circ}\text{C}$
T_{STG}	Storage Temperature Range	-55 to +150	$^{\circ}\text{C}$
$R_{\theta JC}$	Thermal Resistance-Junction to Case	6	$^{\circ}\text{C}/\text{W}$

Electrical Characteristics

T_J=25°C Unless otherwise noted

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
Static characteristics						
V _{(BR)DSS}	Drain-Source Breakdown Voltage	V _{GS} =0V, I _D =-250uA	-30			V
V _{GS(th)}	Gate Threshold Voltage	V _{DS} =V _{GS} , I _D =-250uA	-1.2	-1.6	-2.5	V
I _{GSS}	Gate Leakage Current	V _{DS} =0V, V _{GS} =±25V			±100	nA
I _{DSS}	Drain-Source Leakage Current	V _{DS} =-30V, V _{GS} =0V			-1	uA
V _{SD}	Diode Forward Voltage ³	V _{GS} =0V, I _S =-1A			-1	V
R _{DS(on)}	Drain-Source On-Resistance ³	V _{GS} =-10V, I _D =-10A		7.1	8.5	mΩ
		V _{GS} =-4.5V, I _D =-6A		11.3	14	
Gate charge characteristics						
Q _g	Total Gate Charge ^{3,4}	V _{DD} =-15V, V _{GS} =-4.5V, I _D =-15A		30		nC
Q _{gs}	Gate-Source Charge ^{3,4}			10		
Q _{gd}	Gate-Drain Charge ^{3,4}			10.4		
Dynamic characteristics						
C _{iss}	Input Capacitance	V _{DS} =-15V, V _{GS} =0V, f=1.0MHz		4319		pF
C _{oss}	Output Capacitance			439		
C _{rss}	Reverse Transfer Capacitance			299		
t _{d(on)}	Turn-On Time	V _{DD} =-15V, V _{GS} =-10V, R _G =3.3Ω, I _D =-15A		9.4		ns
t _r	Rise Time			10.2		
t _{d(off)}	Turn-Off Time			117		
t _f	Fall Time			24		

Typical Performance Characteristics

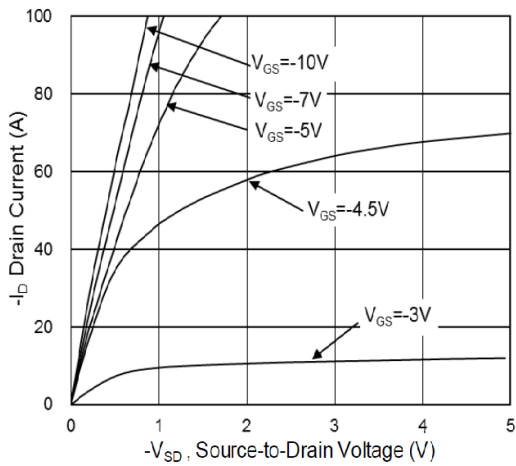


Figure 1. Output Characteristics

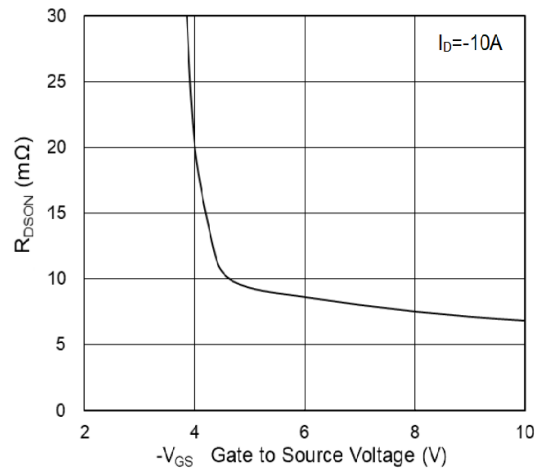


Figure 2. On-Resistance Variation with V_{GS}

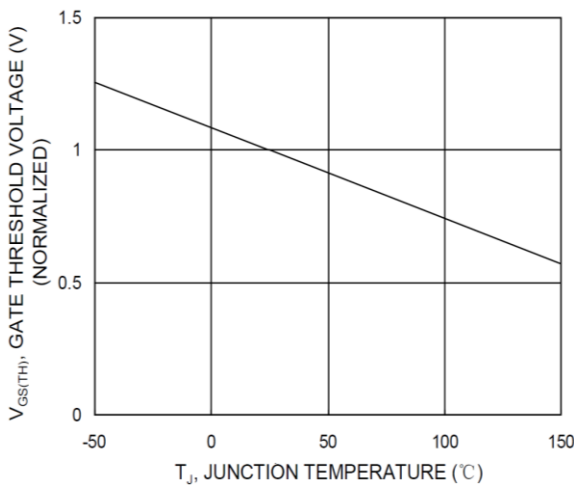


Figure 3. Normalized $V_{GS(th)}$ vs. T_J

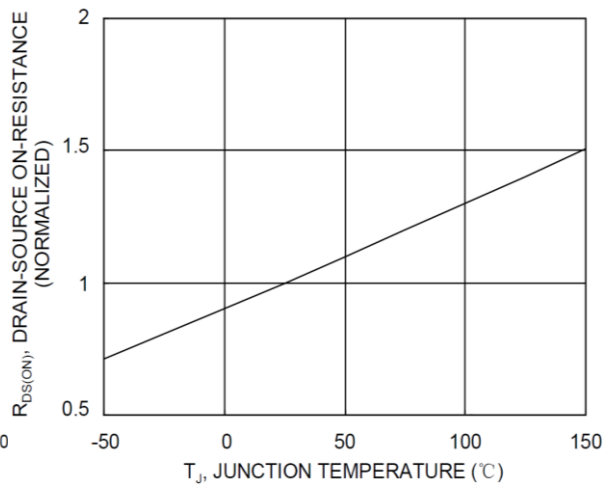


Figure 4. Normalized $R_{DS(ON)}$ vs. T_J

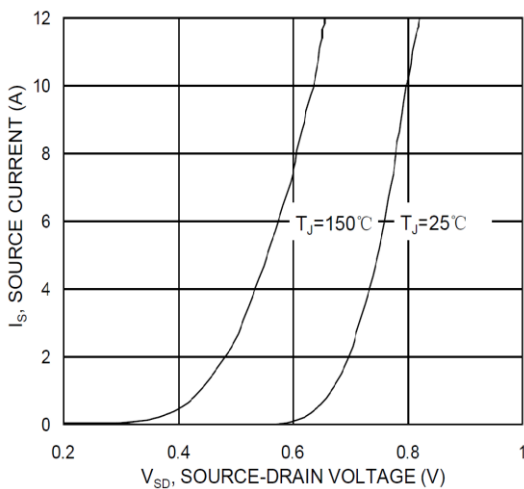


Figure 5. Diode Forward Voltage vs. Current

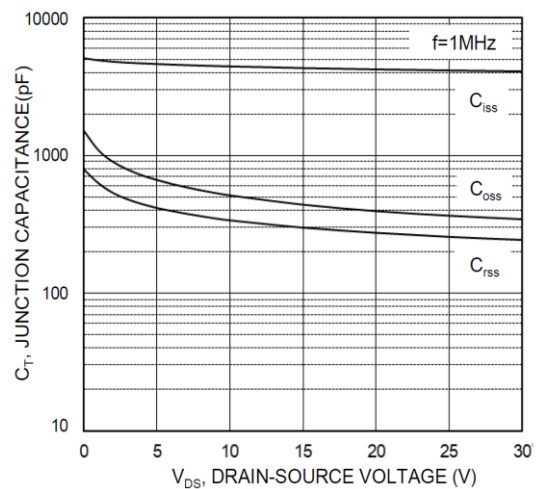


Figure 6. Capacitance

Typical Performance Characteristics (Continue)

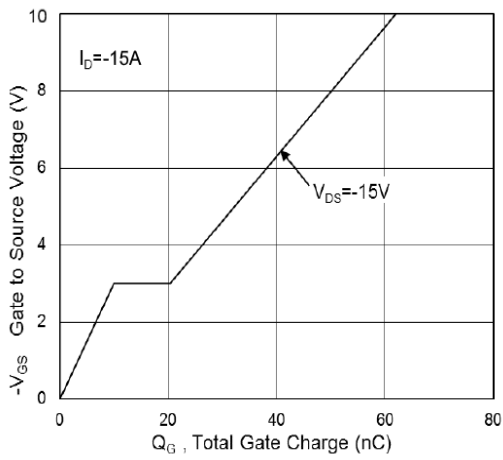


Figure 7. Gate Charge Waveform

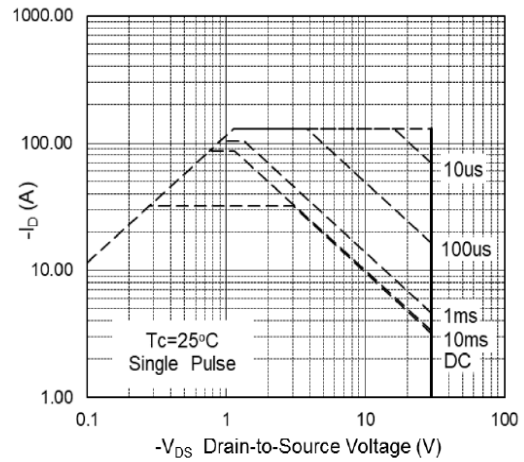


Figure 8. Maximum Safe Operating Area


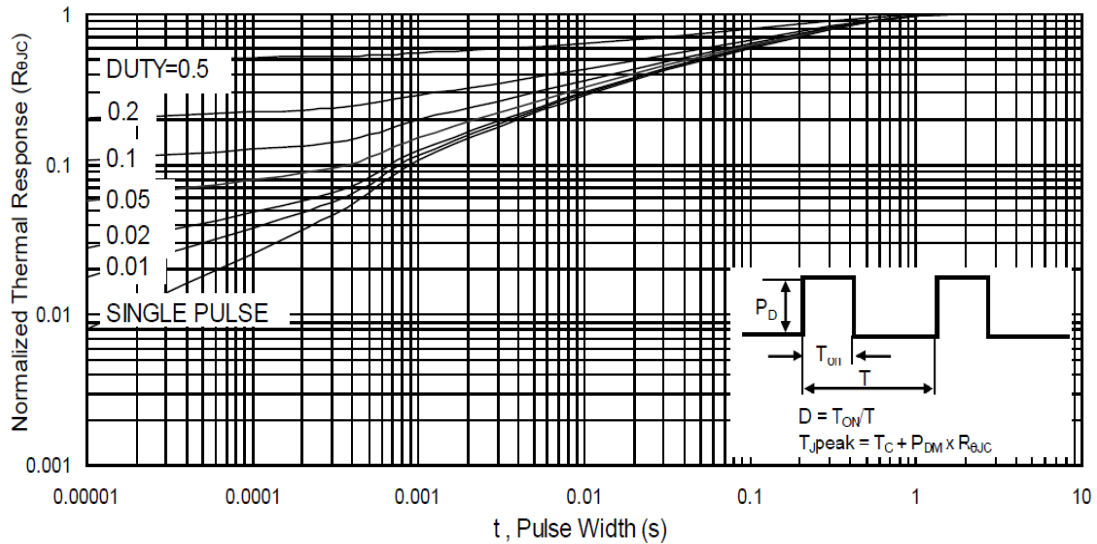


Figure 9. Normalized Transient Thermal Resistance

Package Dimension

DFN3X3-8L

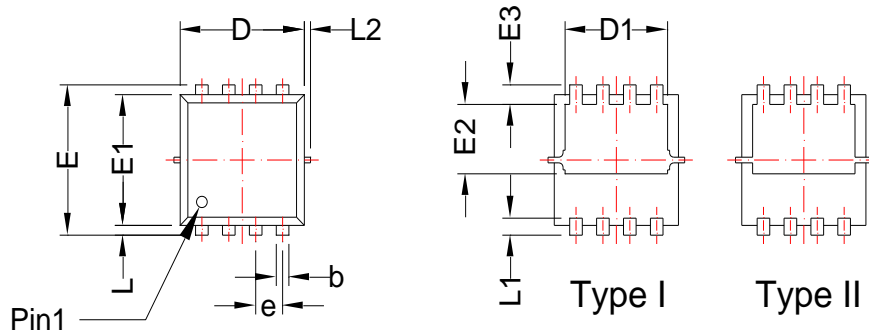

BACKSIDE VIEW



DIMENSION D AND E1 DOES NOT INCLUDE MOLD FLASH, PROTRUSIONS OR GATE BURRS. MOLD FLASH, PROTRUSIONS OR GATE BURRS SHALL NOT EXCEED 0.5mm PER INTERLEAD FLASH OR PROTRUSION SHALL NOT EXCEED 0.5mm PER SIDE.

Dimensions				
SYMBOL	Millimeters		Inches	
	MIN	MAX	MIN	MAX
A	0.70	0.90	0.028	0.035
A1	0.00	0.05	0.000	0.002
b	0.24	0.37	0.009	0.015
c	0.10	0.25	0.004	0.010
D	2.90	3.25	0.114	0.128
D1	2.35	2.60	0.093	0.102
E	3.05	3.45	0.120	0.136
E1	2.90	3.20	0.114	0.126
E2	1.35	2.00	0.053	0.079
E3	0.30	0.60	0.012	0.024
e	0.65 BSC		0.026 BSC	
L	0.02	0.2	0.001	0.008
L1	0.28	0.5	0.011	0.020
L2	---	0.15	---	0.006





NOTICE



- Globaltech Semiconductor assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all Globaltech Semiconductor products described or contained herein. Globaltech Semiconductor products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner.

- Applications shown on the herein document are examples of standard use and operation. Customers are responsible in comprehending the suitable use in particular applications. Globaltech Semiconductor makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

- Information furnished is believed to be accurate and reliable. However Globaltech Semiconductor assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties, which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Globaltech Semiconductor. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information without express written approval of Globaltech Semiconductor.

CONTACT US

GS Headquarter	
	4F.,No.43-1,Lane11,Sec.6,Minquan E.Rd Neihsu District Taipei City 114, Taiwan (R.O.C)
	886-2-2657-9980
	886-2-2657-3630
	sales_twn@gs-power.com

RD Division	
	824 Bolton Drive Milpitas. CA. 95035
	1-408-457-0587