

GSMBT5401 PNP EPITAXIAL PLANAR TRANSISTOR


Description

The GSMBT5401 is designed for general purpose applications requiring high breakdown voltage.

Features

- High Collector-Emitter Breakdown Voltage ($BV_{CEO} = -150V$ @ $I_C = -1mA$)
- Complementary to GSMBT5551

Package Dimensions

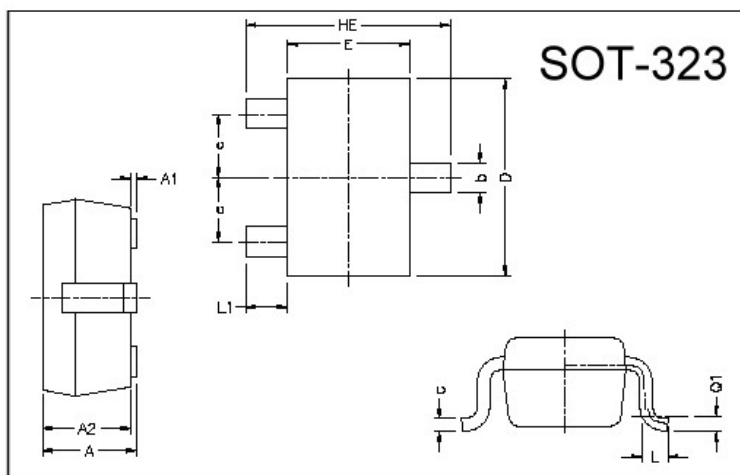

Marking :



REF.	Millimeter		REF.	Millimeter	
	Min.	Max.		Min.	Max.
A	0.80	1.10	L1	0.42 REF.	
A1	0	0.10	L	0.15	0.35
A2	0.80	1.00	b	0.25	0.40
D	1.80	2.20	c	0.10	0.25
E	1.15	1.35	e	0.65 REF.	
HE	1.80	2.40	Q1	0.15 BSC.	

Absolute Maximum Ratings at $T_a = 25^\circ C$






Parameter	Symbol	Ratings	Unit
Junction Temperature	T_J	+150	$^\circ C$
Storage Temperature	T_{stg}	-55~+150	$^\circ C$
Collector to Base Voltage	V_{CBO}	-160	V
Collector to Emitter Voltage	V_{CEO}	-150	V
Emitter to Base Voltage	V_{EBO}	-5	V
Collector Current	I_C	-600	mA
Total Power Dissipation	P_D	225	mW

Electrical Characteristics ($T_a = 25^\circ C$)

Symbol	Min.	Typ.	Max.	Unit	Test Conditions
BV_{CBO}	-160	-	-	V	$I_C = -100\mu A$, $I_E = 0$
BV_{CEO}	-150	-	-	V	$I_C = -1mA$, $I_B = 0$
BV_{EBO}	-5	-	-	V	$I_E = -10\mu A$, $I_C = 0$
I_{CBO}	-	-	-50	nA	$V_{CB} = -120V$, $I_E = 0$
* $V_{CE(sat)1}$	-	-	-200	mV	$I_C = -10mA$, $I_B = -1mA$
* $V_{CE(sat)2}$	-	-	-500	mV	$I_C = -50mA$, $I_B = -5mA$
* $V_{BE(sat)1}$	-	-	-1	V	$I_C = -10mA$, $I_B = -1mA$
* $V_{BE(sat)2}$	-	-	-1	V	$I_C = -50mA$, $I_B = -5mA$
* h_{FE1}	50	-	-		$V_{CE} = -5V$, $I_C = -1mA$
* h_{FE2}	60	-	240		$V_{CE} = -5V$, $I_C = -10mA$
* h_{FE3}	50	-	-		$V_{CE} = -5V$, $I_C = -50mA$
fT	100	-	300	MHz	$V_{CE} = -10V$, $I_C = -10mA$, $f = 100MHz$
Cob	-	-	6	pF	$V_{CB} = -10V$, $I_E = 0$, $f = 1MHz$

* Pulse Test: Pulse Width $\leq 380\mu s$, Duty Cycle $\leq 2\%$

Characteristics Curve

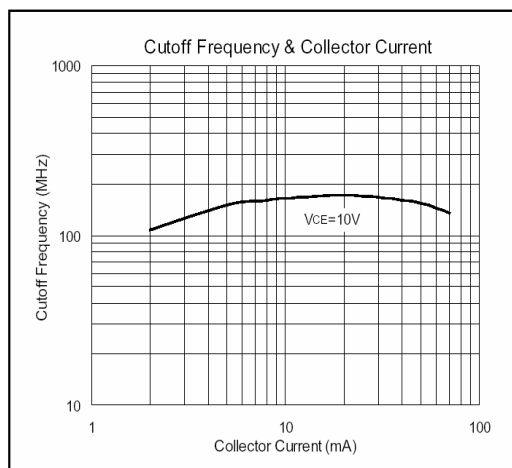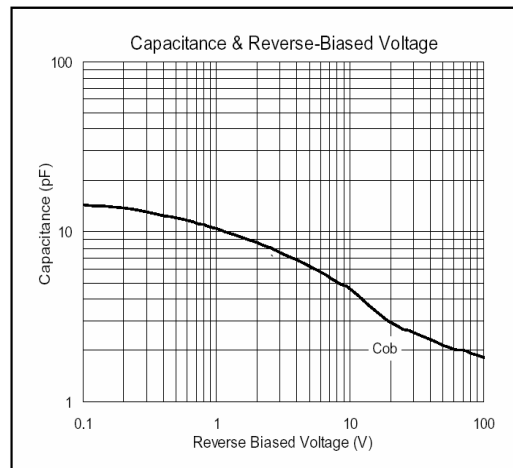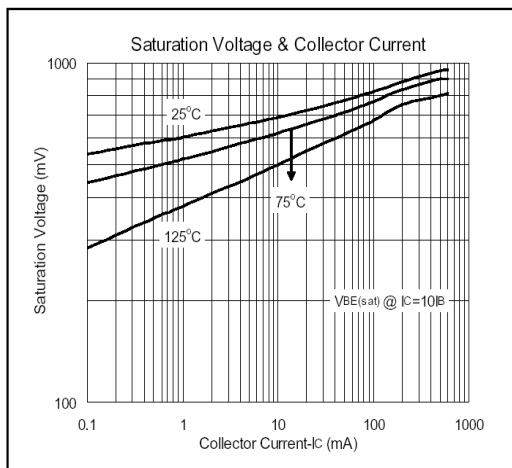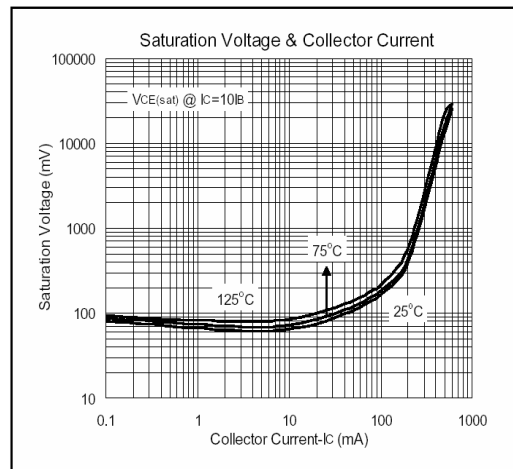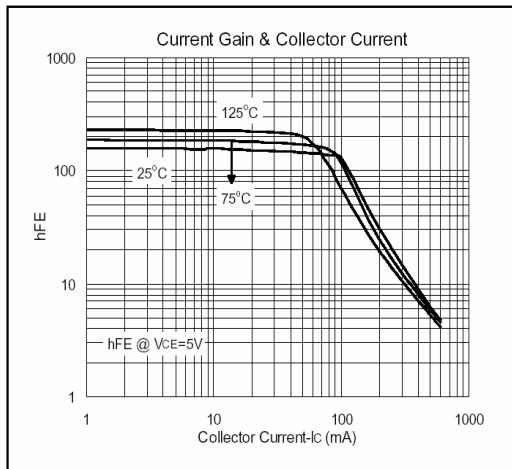

Important Notice:

- All rights are reserved. Reproduction in whole or in part is prohibited without the prior written approval of GTM.
- GTM reserves the right to make changes to its products without notice.
- GTM semiconductor products are not warranted to be suitable for use in life-support Applications, or systems.
- GTM assumes no liability for any consequence of customer product design, infringement of patents, or application assistance.

Head Office And Factory:

- **Taiwan:** No. 17-1 Tatung Rd. Fu Kou Hsin-Chu Industrial Park, Hsin-Chu, Taiwan, R. O. C.
TEL : 886-3-597-7061 FAX : 886-3-597-9220, 597-0785
- **China:** (201203) No.255, Jang-Jiang Tsai-Lueng RD. , Pu-Dung-Hsin District, Shang-Hai City, China
TEL : 86-21-5895-7671 ~ 4 FAX : 86-21-38950165