

GTVS05

FM<-->TV Separator

[Inquire](#)

Applocation

for Spurious reduction

Characteristics


GTVS05	
Zin/Zout	75 ohm Nominal
Pass Band	Low 76 up to 108MHz
	High 175 up to 222MHz
Insertion Loss	Low 3.0dB max (76 up to 108MHz)
	High 3.0dB max (175 up to 222MHz)
Attenuation	Low 10dB min (175 up to 222MHz)
	Low 5dB min (0 up to 20MHz)
	High 10dB min (76 up to 108MHz)
	High 15dB min (350 up to 500MHz)

Number of ordered pieces

1000pcs/Reel

Dimensions

Dimension (Unit : mm)

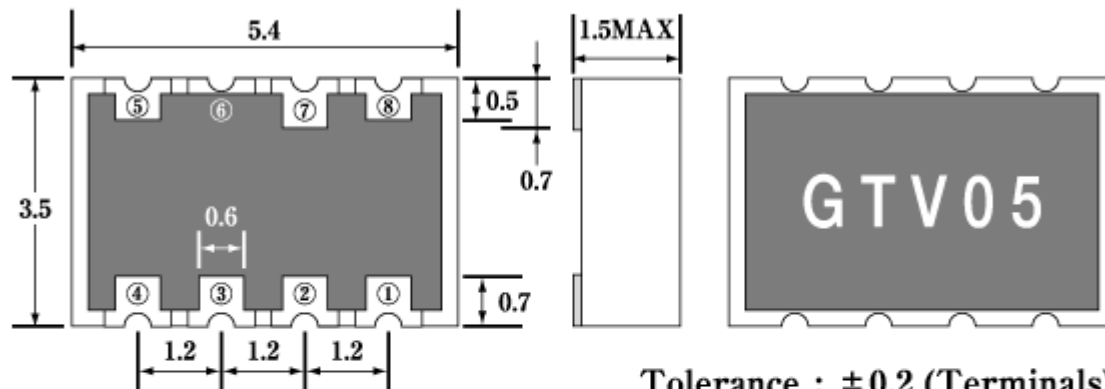


Tolerance : ± 0.2 (Terminals)
: ± 0.3 (Outward)

Terminal			
①	Low	⑤	Fixed
②	GND(Low)	⑦	Common
③	GND(High)	⑧	Fixed
④	High		

Note

Do not connect any wiring (inclusive of grounding) to terminals No.5,6 and No.8. They are provided solely for internal connections.

Frequency Data

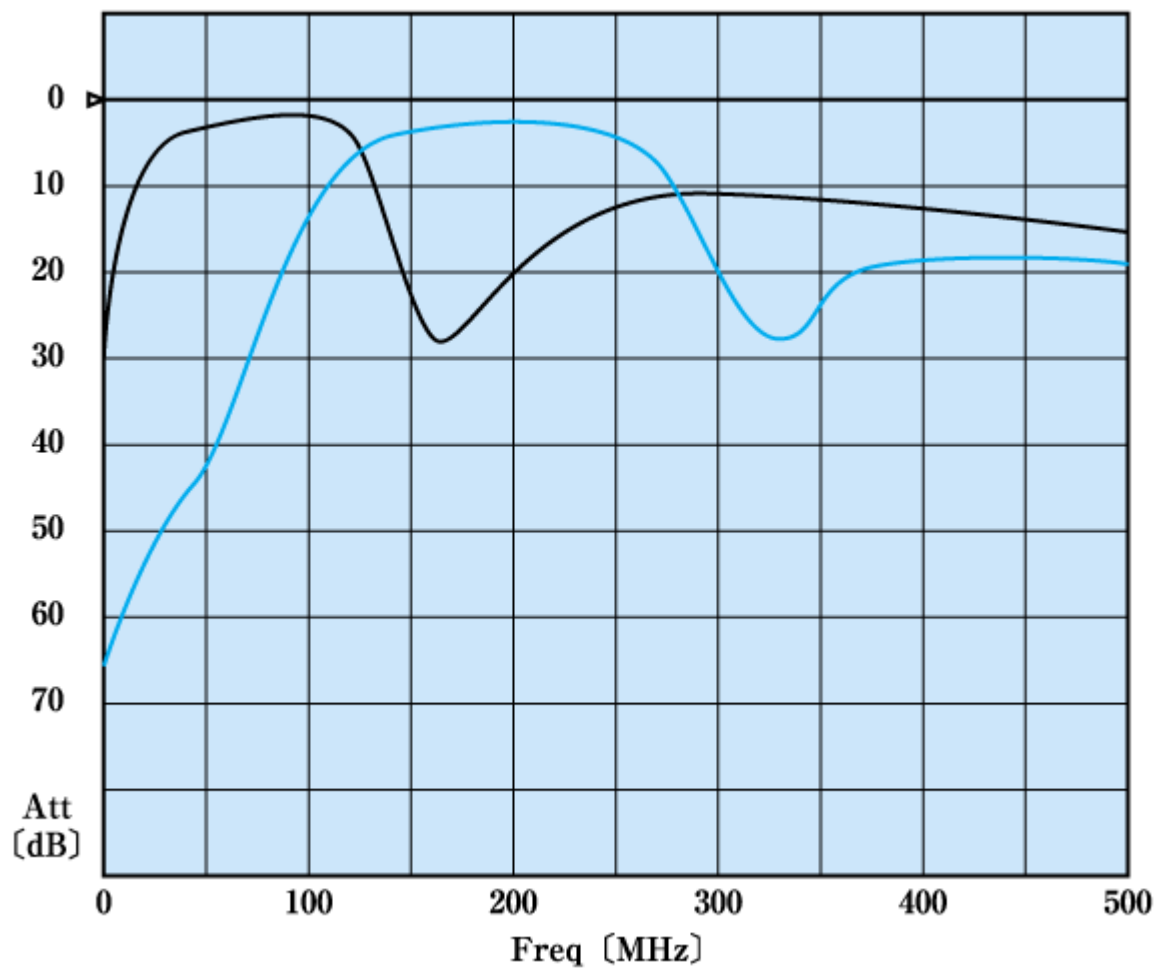

► Products li