


# GU140X32F-7064B

## SIMPLIFIED DATASHEET

### Features

4 line simultaneous display capable wide screen VFD module. This item is narrow PWB and side mounting hole type model.

### Physical dimension

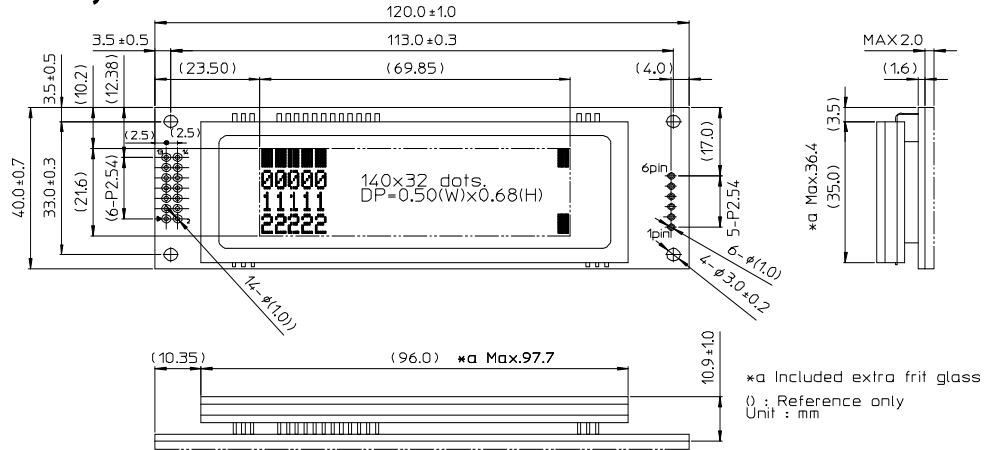

### Get full specification



Click here to go to request form.

### Specifications

#### Electrical Ratings

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Power supply voltage	VCC	4.75	5.00	5.25	VDC	-

#### Electrical Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
'L' Logic Input Current SIN, SCK, /CS, /RESET	IIL	-	-	-0.6	mA	VIN=0V
'H' Logic Input Current SIN, SCK, /CS, /RESET	IIH	-	-	1.0	μADC	VIN=5V
Logic Input Voltage	VIH	0.8VCC	-	VCC	VDC	-
Logic Input Voltage	VIL	0	-	0.2VCC	VDC	-
Logic Output Voltage	VOH	3.8	-	VCC	VDC	IOH=-1.5mA
Logic Output Voltage	VOL	0	-	0.6	VDC	IOL=1.6mA
Power Supply Current 1	ICC-1	-	370	480	mADC	All dots ON
Power Supply Current 2	ICC-2	-	310	400	mADC	All dots OFF
Power Supply Current 3	ICC-3	-	18	30	mADC	Display power OFF
Power Consumption		-	1.85	2.40	W	All dots ON

#### Optical Specifications

Parameter	
Luminance	350 cd/m <sup>2</sup> Min. (700 cd/m <sup>2</sup> Typ.)
Color of illumination	Green (Blue-Green)

#### Environmental Specifications

Parameter	
Operating Temperature	-40 ~ +85 degrees celsius
Storage Temperature	-60 ~ +85 degrees (Under 168 hours)/-40 ~ +85 degrees (Or more)
Operating Humidity	20 ~ 80% R.H. (non-condensing)
Storage Humidity	20 ~ 80% R.H. (non-condensing)
Vibration (non-operating)	10-55-10Hz, all amplitude 1mm, 30 minutes, X-Y-Z
Shock (non-operating)	392m/s <sup>2</sup> (40G) 9ms X-Y-Z, 3 times each direction

#### Physical Specifications

Parameter	
Number of Dots	4,480 (140 x 32)
Display Area	69.85 mm x 21.60 mm
Dot Size (X x Y)	0.35 mm x 0.53 mm
Dot Pitch (X x Y)	0.50 mm x 0.68 mm
Weight	About 57 g

#### Interface

Sync/Asynchronous Serial, SPI(CMOS)

#### Pin Assignment (Parallel)

(Synchronous)		(SPI)
Pin No.	Signal	Pin No. Signal
1	VCC	1 VCC
2	SIN	2 SIN
3	GND	3 GND
4	SBUSY	4 SBUSY
5	SCK	5 SCK
6	/RESET	6 /RESET
7	NC	7 /CS

#### (Asynchronous)

Pin No.	Signal	Baud Rate Setting
1	VCC	9600bps
2	SIN	19200bps
3	GND	38400bps*
4	SBUSY	115200bps
5	NC	(*:Default setting)
6	/RESET	
7	NC	

#### Selectable Font

Parameter		*ANK(Alphabet, Numeric, Kana)
Character font type	5 x 7	ANK, International
Character width	Fixed/Proportional character format 1&2	
Character numbers	20 x 4 by 5 x 7 dot ASCII	
	23 x 4 by 5 x 7 dot Proportional	

#### Functions

Parameter	
Control command	
Scroll display action	
Proportional Font function	
User-Windows function	
AND/OR/XOR Mixture display	
Reverse display	
Dot unit real-time bit image display	
Download character function	
Font Magnification function	
etc.	