

GUVS02

VHF<-->UHF Separator

[Inquire](#)**Application**

for Spurious reduction

Characteristics


GUVS02	
Zin/Zout	75 ohm Nominal
Pass Band	Low 40 up to 300MHz
	High 470 up to 890MHz
Insertion Loss	Low 1.0dB max (40 up to 300MHz)
	High 1.5dB max (470 up to 890MHz)
V.S.W.R	Low 1.5 max (40 up to 300MHz)
	High 2.5 max (470 up to 890MHz)
Attenuation	Low 20dB min (470 up to 890MHz)
	High 40dB min (40 up to 230MHz)

Number of ordered pieces

2000pcs/Box

Dimensions

Dimension (Unit : mm)

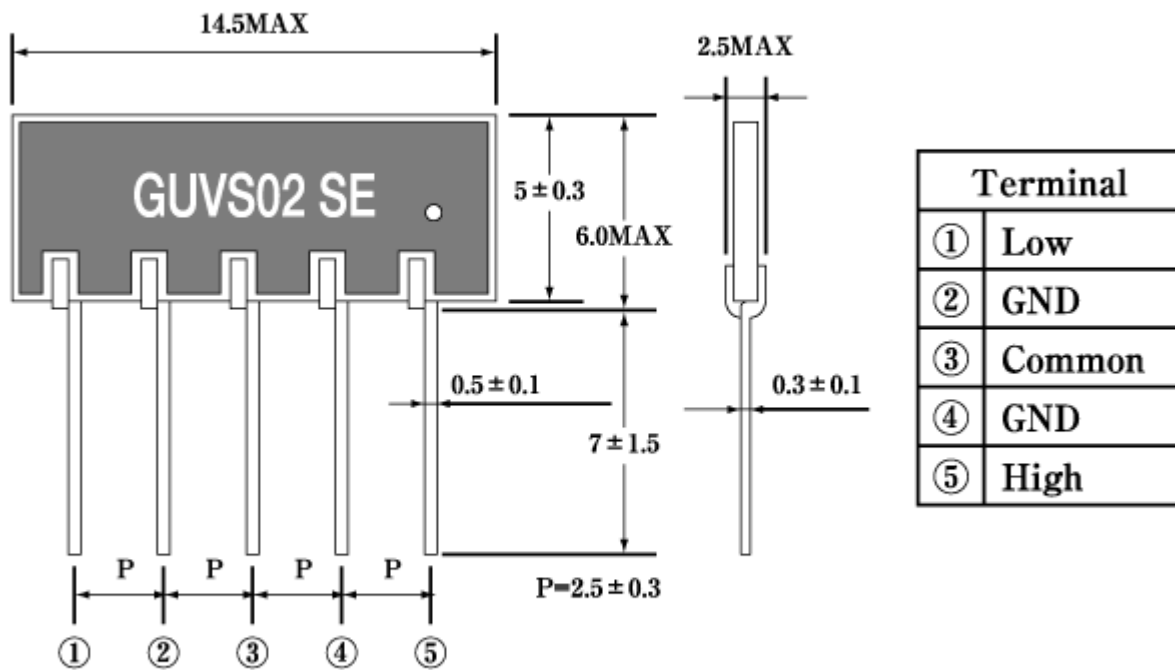

Frequency Data

