

GUVS04

VHF<-->UHF Separator

Inquir

Applocation

for Spurious reduction

Characteristics


GUVS04	
Zin/Zout	75 ohm Nominal
Pass Band	Low 40 up to 230MHz High 470 up to 890MHz
Insertion Loss	Low 1.0dB max (40 up to 230MHz) High 1.2dB max (470 up to 770MHz) High 1.5dB max (770 up to 890MHz)
V.S.W.R	Low 1.5 max (40 up to 230MHz) High 2.2 max (470 up to 770MHz) High 2.5 max (770 up to 890MHz)
Attenuation	Low 25dB min (470 up to 890MHz) High 25dB min (40 up to 230MHz)

Number of ordered pieces

2000pcs/Reel

Dimensions

Dimension (Unit : mm)

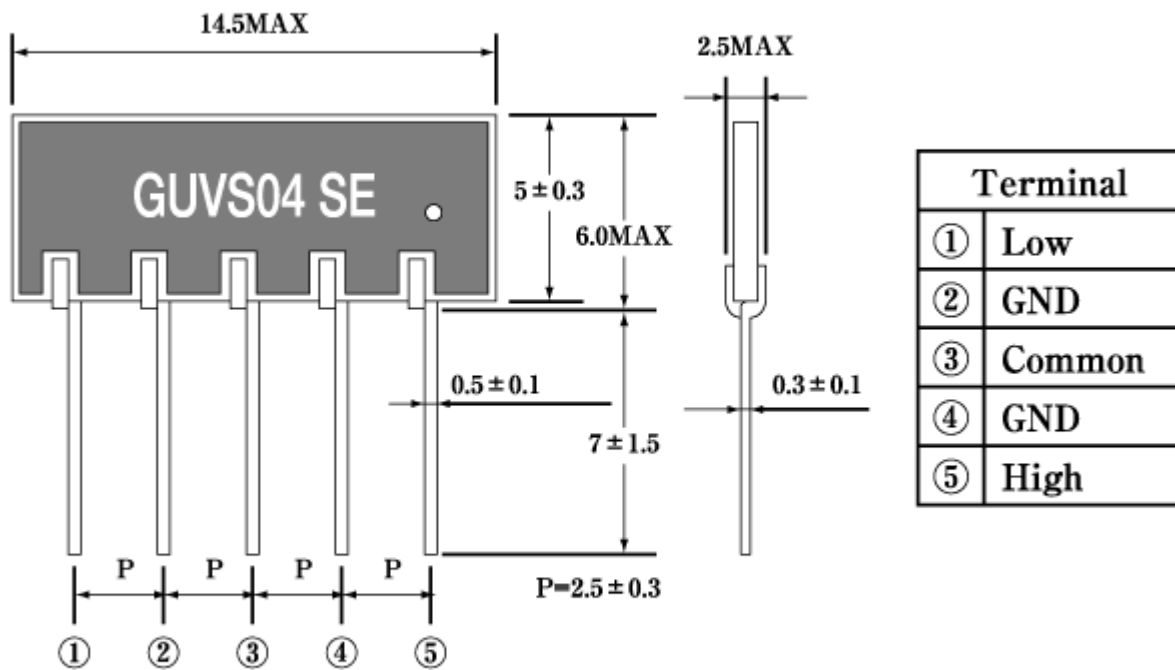

Frequency Data

