



+5 VOLT SURFACE MOUNT


# Monolithic Amplifier

## GVA-82+

50Ω DC to 7 GHz

### THE BIG DEAL

- Gain, 15 dB typ. at 100 MHz
- High  $P_{OUT}$ , P1dB 20 dBm typ.
- High IP3, +40 dBm typ. at 100 MHz
- Ruggedized design
- Fixed +5V operation
- Unconditionally stable
- Excellent ESD Protection
- Transient protected, US patent 6,943,629



Generic photo used for illustration purposes only

CASE STYLE: DF782

### +RoHS Compliant

The +Suffix identifies RoHS Compliance. See our website for methodologies and qualifications

**LTE Performance**



### APPLICATIONS

- Base station infrastructure
- Portable Wireless
- CATV & DBS
- MMDS & Wireless LAN
- LTE

### PRODUCT OVERVIEW

GVA-82+ (RoHS compliant) is a wideband amplifier offering high dynamic range. Lead finish is SnAgNi. It has repeatable performance from lot to lot and is enclosed in a SOT-89 package. It uses patented Transient Protected Darlington configuration and is fabricated using InGaP HBT technology.

### SIMPLIFIED SCHEMATIC AND PIN DESCRIPTION

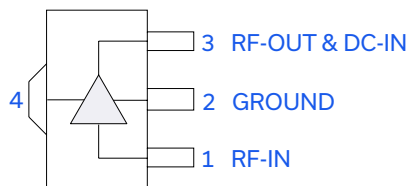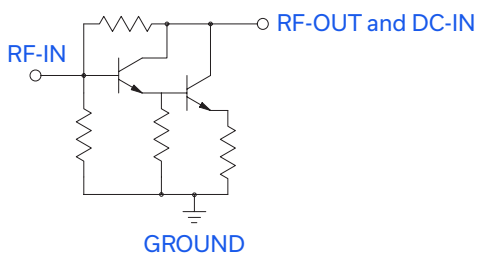

Function	Pin Number	Description
RF-IN	1	RF input pin. This pin requires the use of an external DC blocking capacitor chosen for the frequency of operation.
RF-OUT and DC-IN	3	RF output and bias pin. DC voltage is present on this pin; therefore a DC blocking capacitor is necessary for proper operation. An RF choke is needed to feed DC bias without loss of RF signal due to the bias connection, as shown in "Recommended Application Circuit", Fig. 2
GND	2,4	Connections to ground. Use via holes as shown in "Suggested Layout for PCB Design" to reduce ground path inductance for best performance.

REV. B  
ECO-010563  
GVA-82+  
MCL NY  
240801





+5 VOLT SURFACE MOUNT

# Monolithic Amplifier

## GVA-82+

50Ω DC to 7 GHz

### ELECTRICAL SPECIFICATIONS<sup>1</sup> AT +25°C AND +5V, UNLESS NOTED OTHERWISE

Parameter	Condition (GHz)	Min.	Typ.	Max.	Units
Frequency Range <sup>2</sup>		DC		7	GHz
Gain	0.1	13.7	15.3	16.8	dB
	1.0	—	14.9	—	
	2.0	12.2	13.8	15.2	
	3.0	—	12.5	—	
	4.0	9.8	11.7	13.0	
	6.0	—	10.6	—	
	7.0	—	9.9	—	
Magnitude of Gain Variation versus Temperature <sup>3</sup> (values are negative)	0.1	—	0.0002	—	dB/°C
	1.0	—	0.0012	—	
	2.0	—	0.0020	0.005	
	3.0	—	0.0027	—	
	4.0	—	0.0037	—	
	6.0	—	0.0062	—	
	7.0	—	0.0108	—	
Input Return Loss	0.1	—	35.0	—	dB
	1.0	—	24.0	—	
	2.0	14.0	18.5	—	
	3.0	—	15.9	—	
	4.0	—	15.8	—	
	6.0	—	19.7	—	
	7.0	—	14.4	—	
Output Return Loss	0.1	—	17.7	—	dB
	1.0	—	15.7	—	
	2.0	9.0	12.3	—	
	3.0	—	10.8	—	
	4.0	—	10.0	—	
	6.0	—	10.9	—	
	7.0	—	10.5	—	
Reverse Isolation	2.0		23.6		dB
Output Power @1 dB compression	0.1	+18.0	+20.1	—	dBm
	1.0	+18.0	+20.1	—	
	2.0	+18.0	+20.6	—	
	3.0	—	+20.6	—	
	4.0	—	+20.2	—	
	6.0	—	+18.2	—	
	7.0	—	+18.2	—	
Output IP3	0.1	—	+40.3	—	dBm
	1.0	—	+38.0	—	
	2.0	+34.0	+36.0	—	
	3.0	—	+34.3	—	
	4.0	—	+32.7	—	
	6.0	—	+31.0	—	
	7.0	—	+30.9	—	
Noise Figure	0.1	—	6.5	8.0	dB
	1.0	—	6.6	—	
	2.0	—	6.6	8.2	
	3.0	—	6.8	—	
	4.0	—	6.9	—	
	6.0	—	7.5	—	
	7.0	—	8.2	—	
Group Delay	2.0		100		psec
Device Operating Voltage		+4.8	+5.0	+5.2	V
Device Operating Current		90	106	120	mA
Device Current Variation vs. Temperature			70.5		μA/°C
Device Current Variation vs Voltage			0.038		mA/mV
Thermal Resistance, junction-to-ground lead			68		°C/W

1. Measured on Mini-Circuits test board TB-313. See Characterization Test Circuit (Fig. 1)

2. Guaranteed specification DC\*-7 GHz. \*Low frequency cut off determined by external coupling capacitors and RF Choke (RFC).

3. (Gain at 85°C, Gain at -45°C)/130





+5 VOLT SURFACE MOUNT

# Monolithic Amplifier

## GVA-82+

50Ω DC to 7 GHz

### ABSOLUTE MAXIMUM RATINGS

Parameter	Ratings
Operating Temperature (ground lead)	-40°C to +85°C
Storage Temperature	-65°C to +150°C
Operating Current at +5V	160 mA
Power Dissipation	0.84 W
Input Power	+20 dBm
DC Voltage on Pin 3	+5.8 V

Permanent damage may occur if any of these limits are exceeded.  
 Electrical maximum ratings are not intended for continuous normal operation.  
 For continuous operation, do not exceed 5.2V device voltage.

### CHARACTERIZATION TEST CIRCUIT

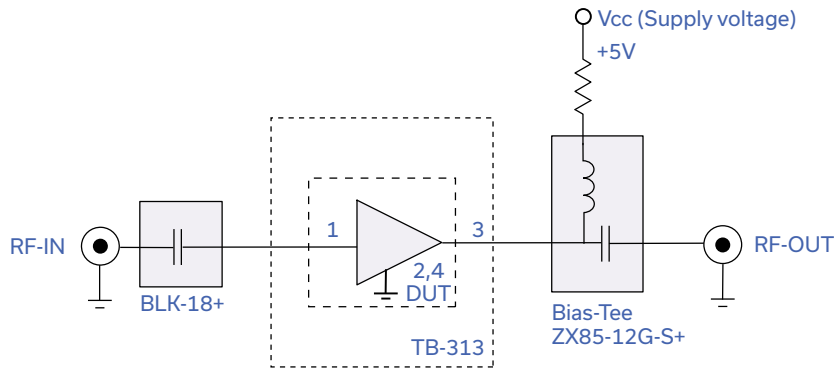


Fig 1. Block Diagram of Test Circuit used for characterization. (DUT soldered on Mini-Circuits Test Board TB-313)

Gain, Output power at 1dB compression (P1 dB) and output IP3 (OIP3) are measured using R&S Network Analyzer ZVA-24. Noise Figure measured using Agilent's N5242A PNA-X microwave network analyzer.

Conditions:

1. Gain and Return loss:  $P_{IN} = -25\text{dBm}$
2. Output IP3 (OIP3): Two tones, spaced 1 MHz apart, 0 dBm/ tone at output.

### RECOMMENDED APPLICATION CIRCUIT


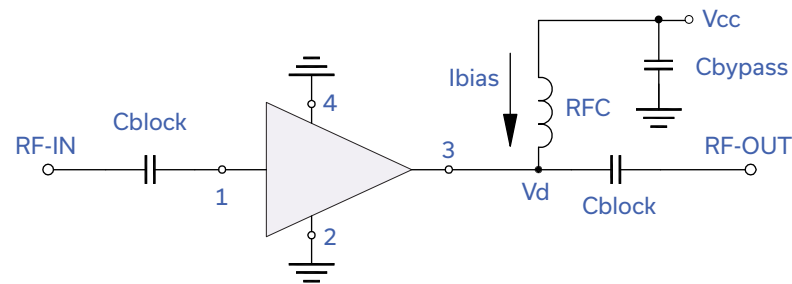


Fig 2. Test Board includes case, connectors, and components soldered to PCB.

### PRODUCT MARKING



Marking may contain other features or characters for internal lot control





+5 VOLT SURFACE MOUNT

# Monolithic Amplifier

## GVA-82+

50Ω DC to 7 GHz

**ADDITIONAL DETAILED TECHNICAL INFORMATION IS AVAILABLE ON OUR DASHBOARD. [CLICK HERE](#)**

<b>Performance Data</b>	Data Table Swept Graphs S-Parameter (S2P Files) Data Set (.zip file)
<b>Case Style</b>	DF782 (SOT 89) Plastic package, exposed paddle lead finish: Matte-tin
<b>Tape &amp; Reel</b> Standard quantities available on reel	F55 7" reels with 20, 50, 100, 200, 500 or 1K devices
<b>Suggested Layout for PCB Design</b>	PL-255
<b>Evaluation Board</b>	TB-410-82+
<b>Environmental Ratings</b>	ENV08T1

### ESD RATING

Human Body Model (HBM): Class 1C (1000v to < 2000v) in accordance with ANSI/ESD STM 5.1 - 2001

Machine Model (MM): Class M2 (100V to < 200V) in accordance with ANSI/ESD STM 5.2 - 1999

### MSL RATING

Moisture Sensitivity: MSL1 in accordance with IPC/JEDECJ-STD-020D

- NOTES**
- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
  - B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
  - C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/terms/viewterm.html](http://www.minicircuits.com/terms/viewterm.html)

