

General UV Sensor Probe

GUV^{x1}-T1XGC-ILA2

(Supply Voltage: 9-24V, Current Output)



Option : x¹ : Select Detection Range

Features

- Air Environment, Single Supply Voltage, 4 ~ 20mA Current Output, Integral cable.

Applications

UV Lamp Monitoring

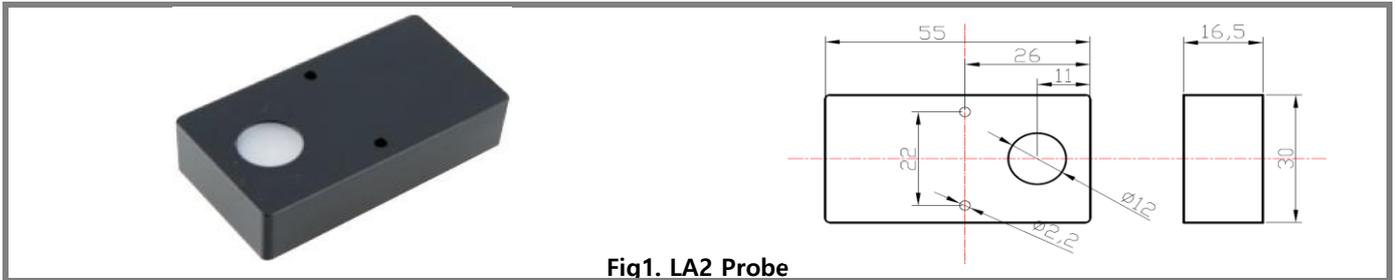


Fig1. LA2 Probe

Case Dimensions

Parameter	Size (mm ³)	Window (mm)	No. of fixed hole	hole to hole (mm)	Weight (g)
Dimensions	55 × 30 × 16	12	2	22	57

Absolute Maximum Ratings

Parameter	Symbol	Value			Unit	Remark
		Min.	Typ.	Max.		
Storage Temperature	T _{st}	-40		90	°C	
Operating Temperature	T _{op}	-30		85	°C	

Detection Range(Option)

Parameter	Product	Symbol	Value	Unit	Remark	
Detection Range	UV	λ	GUVV-T10GC-ILA2	230 ~ 395	nm	10% of Max.
			GUVA-T11GC-ILA2	220 ~ 370		
			GUVB-T11GC-ILA2	220 ~ 320		
			GUVC-T10GC-ILA2	220 ~ 280		
			GUVL-T10GC-ILA2	220 ~ 320		
	Visible		GVBL-T12GC-ILA2	220 ~ 445		
			GVGR-T10GC-ILA2	300 ~ 510		

*Refer to page 2 for responsivity curve


Electro-Optical Characteristics (at 25 °C)

Parameter	Symbol	Value			Unit	Remark
		Min.	Typ.	Max.		
Supply Voltage	V _{cc}	9		24	V	
Offset Current	I _{off}	3.9	4	4.1	mA	
Supply Current	I _Q		0.05		mA	
Output Voltage	V _{out}	4		20	mA	
Detection Power Range	P	0		100	mW/cm ²	*Standard
Response Time	T		10		ms	


X¹ : Detection Range(GUVx-UV, GVxx-Visible)

* Order production available (20, 50, 500mW/cm² etc), Please fill out the detection power range you want when ordering

Responsivity Curve

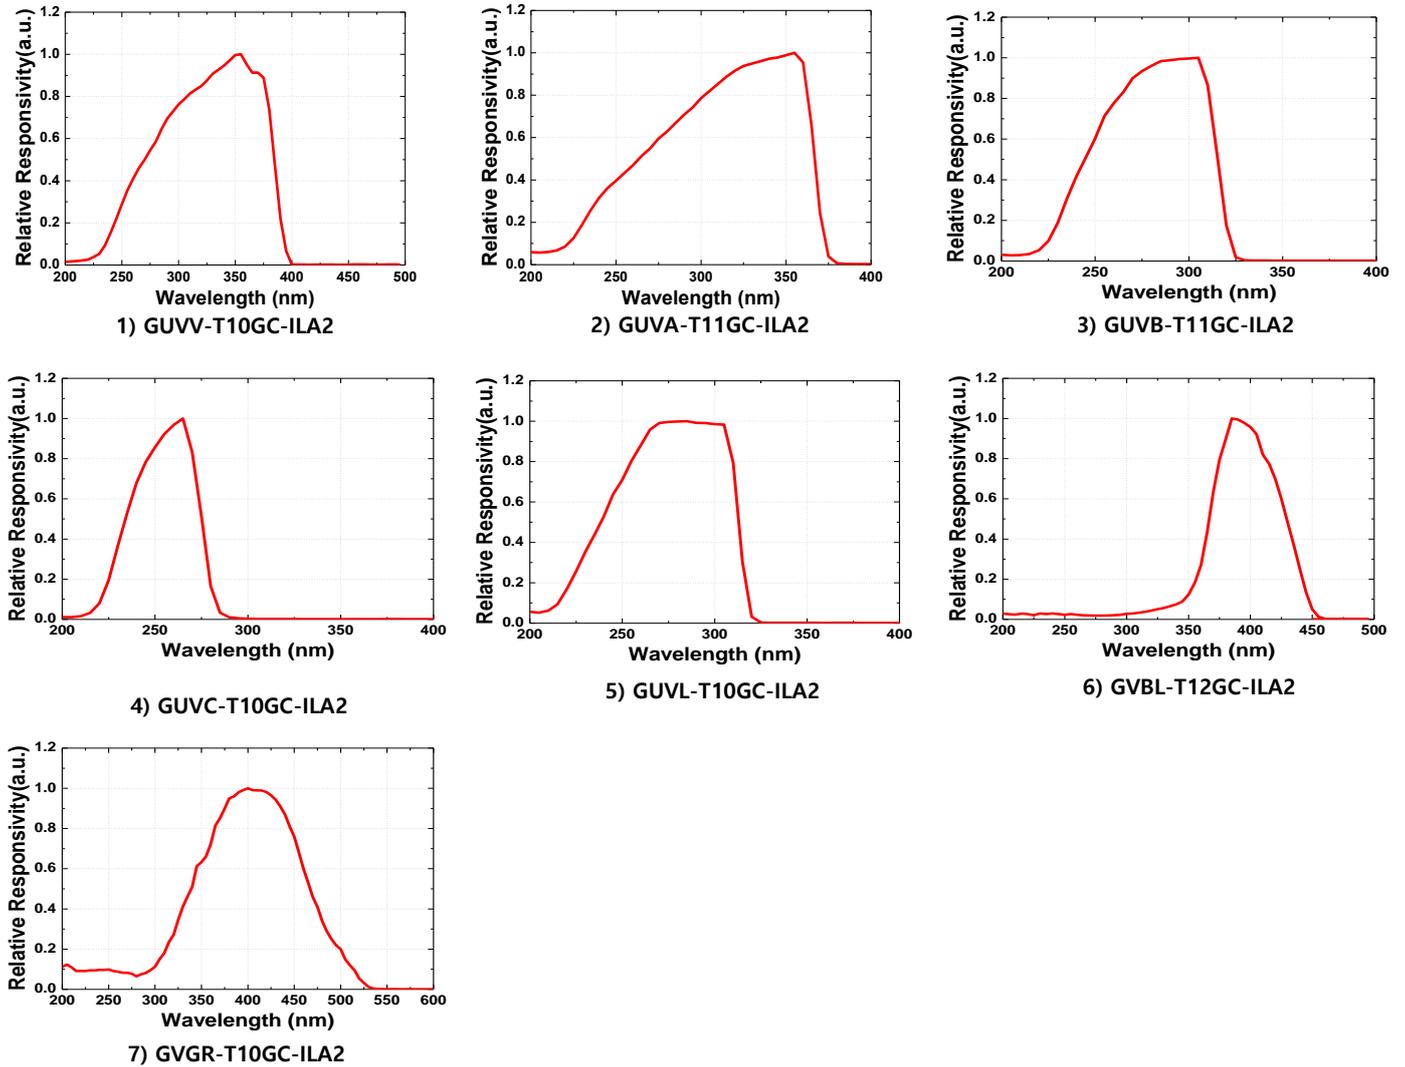

UV Power along Output Current

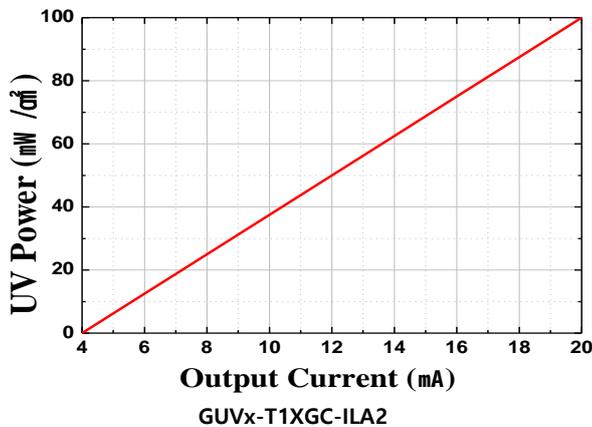

$$\text{UV Power (mW/cm}^2\text{)} = [I_{\text{out}} \text{ (mA)} - 4] \times 6.25$$

Wiring connections



Color	Terminal	Remark
Red	V _{cc}	DC 9 -24V
Black	GND	
Green	I _{out}	4 ~ 20mA
White	GND	

Black and White lines (GND) are connect to the internal Sensor probe.