

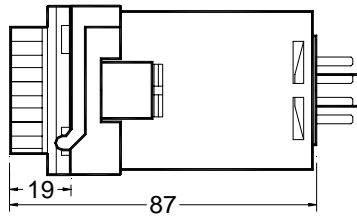


H3CT-A/H3CT-B/H3CT-C



。 DIMENSIONS 规格尺寸

H3CT- + Y-48 Adapter

INSERT HOLE



H3CT-



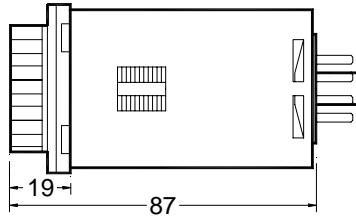



。 OPERATION 操作方式

H3CT-

MODE B

MODE A

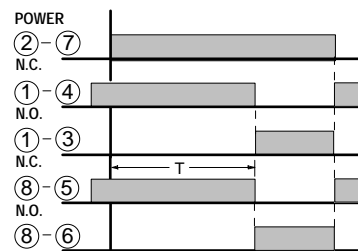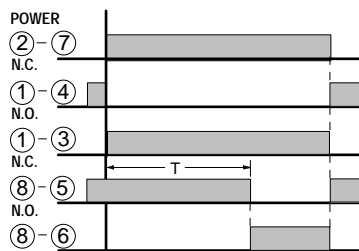

COM. : Common terminal
 N.C. : Normally closed contact
 N.O. : Normally open contact

● ▲ ● : Timed out contact
 ○ ○ : Instantaneous contact

- NOTE:
- 。 Set time should be greater than min. operation time.
 - 。 Once power is cut off or timing operation is completed, power off time is needed to start the operation again.
 - 。 Do not change the set time during operation.
 - 。 When changing set time, cut off power and set the time.