

4-Line TVS Diode Array



**APPLICATION**

- ◆ Peripherals
- ◆ Industrial Equipment
- ◆ Notebook Computers
- ◆ Portable Instrumentation
- ◆ Microprocessor Based Equipment
- ◆ Cell Phone Handsets and Accessories
- ◆ Personal Digital Assistants (PDAs) and Pagers




**IEC COMPATIBILITY**

Package: SOT-363

- ◆ IEC61000-4-2 (ESD) ±30kV (air), ±30kV (contact)
- ◆ IEC61000-4-5 (Lightning)8A (8/20µs)

**FEATURES**

- ◆ Low leakage current
- ◆ Operating voltage: 5V
- ◆ Low clamping voltage



Pin Configuration

**Electrical Characteristics**


Parameter	Symbol	Value	Unit
Peak Pulse Power (tp=8/20µs waveform)	P <sub>ppp</sub>	100	W
Peak Pulse Current (8/20µs)	I <sub>pp</sub>	8	A
ESD per IEC 61000-4-2 (Air)	V <sub>ESD</sub>	±30	kV
ESD per IEC 61000-4-2 (Contact)		±30	
Operating Temperature Range	T <sub>J</sub>	-55 to +125	°C
Storage Temperature Range	T <sub>stg</sub>	-55 to +150	°C

**Electrical Characteristics**

Part Number	VRWM	VBR	IR (max)	Co Max value	Vc @1A Max	Vc @ A Max	Ipp@8/20us	Ppp 8/20us	Delivery Time
	V	V	(uA)	pF	V	V	A max	W	Days
HAN0515S3	5	6	0.2	130	9	15	8	100	7days

## 4-Line TVS Diode Array

### Package Mechanical Data

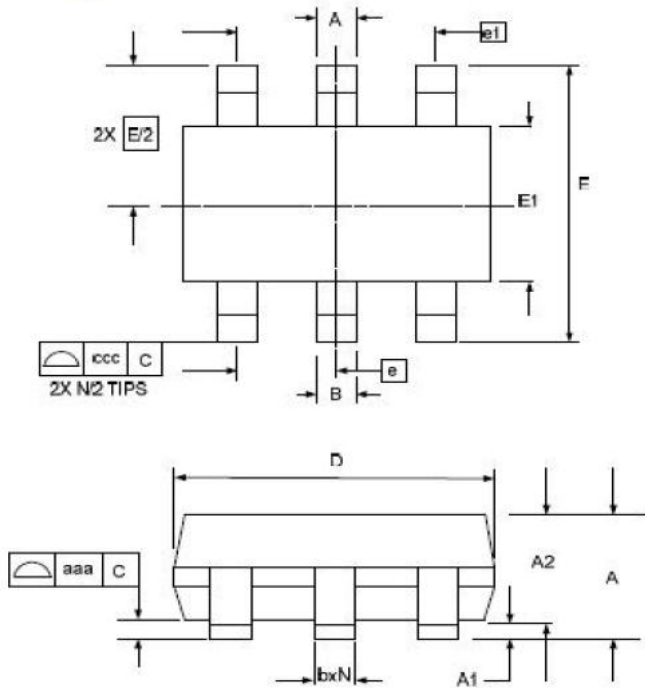

SYM	DIMENSIONS					
	INCHES			MILLIMETERS		
	MIN	NOM	MAX	MIN	NOM	MAX
A	-	-	.043	-	-	1.10
A1	.000	-	.004	0.00	-	0.10
A2	.028	.035	.039	0.70	0.79	1.00
b	.006	-	.012	0.15	-	0.30
c	0.03	-	.009	0.08	-	0.22
D	.075	.079	.087	1.90	2.00	2.20
E1	.045	.049	.053	1.15	1.25	1.35
E	.083BSC			2.10BSC		
e	.026BSC			0.65BSC		
e1	.051BSC			1.30BSC		
L	.010	.014	.018	0.26	0.36	0.46
L1	(.017)			(0.42)		
N	6			6		
θ	0°	-	8°	0°	-	8°

### Ordering Information

Part Number	Qty per Reel	Reel Size	Package	Delivery Time
<b>HAN0515S3</b>	3000pcs	7inch	SOT-363	7days

Specifications are subject to change without notice

2

Tel: +86-755-27465585

HUAAN LIMITED

[www.huaandz.com](http://www.huaandz.com)

Email: [sales@huaandz.com](mailto:sales@huaandz.com)