
HB52RF1289E2-75B

1 GB Registered SDRAM DIMM
128-Mword \times 72-bit, 133 MHz Memory Bus, 2-Bank Module
(36 pcs of 64 M \times 4 Components)
PC133 SDRAM

ELPIDA

E0018H20 (Ver. 2.0)
Aug. 20, 2001 (K)

Description

The HB52RF1289E2 belongs to 8-byte DIMM (Dual In-line Memory Module) family, and has been developed as an optimized main memory solution for 8-byte processor applications. The HB52RF1289E2 is a 64M \times 72 \times 2-bank Synchronous Dynamic RAM Module, mounted 36 pieces of 256-Mbit SDRAM (HM5225405BTB) sealed in TCP package, 1 piece of PLL clock driver, 3 pieces register driver and 1 piece of serial EEPROM (2-kbit) for Presence Detect (PD). An outline of the HB52RF1289E2 is 168-pin socket type package (dual lead out). Therefore, the HB52RF1289E2 makes high density mounting possible without surface mount technology. The HB52RF1289E2 provides common data inputs and outputs. Decoupling capacitors are mounted beside TCP on the module board.

Note: Do not push the cover or drop the modules in order to protect from mechanical defects, which would be electrical defects.

Features

- Fully compatible with : JEDEC standard outline 8-byte DIMM
- 168-pin socket type package (dual lead out)
 - Outline: 133.37 mm (length) \times 38.10 mm (Height) \times 4.80 mm (Thickness)
 - Lead pitch: 1.27 mm
- 3.3 V power supply
- Clock frequency: 133 MHz (max)
- LVTTTL interface
- Data bus width: \times 72ECC
- Single pulsed $\overline{\text{RAS}}$
- 4 Banks can operates simultaneously and independently
- Burst read/write operation and burst read/single write operation capability
- Programmable burst length: 1/2/4/8
- 2 variations of burst sequence

HB52RF1289E2-75B


- Sequential
- Interleave
- Programmable \overline{CE} latency : 4
- Byte control by DQMB
- Refresh cycles: 8192 refresh cycles/64 ms
- 2 variations of refresh
 - Auto refresh
 - Self refresh

Ordering Information

| Type No. | Frequency | \overline{CE} latency | Package | Contact pad |
|------------------|-----------|-------------------------|-----------------------------------|-------------|
| HB52RF1289E2-75B | 133 MHz | 4 | 168-pin dual lead out socket type | Gold |

Note: 1. 100 MHz operation at \overline{CE} latency = 3.

Pin Arrangement

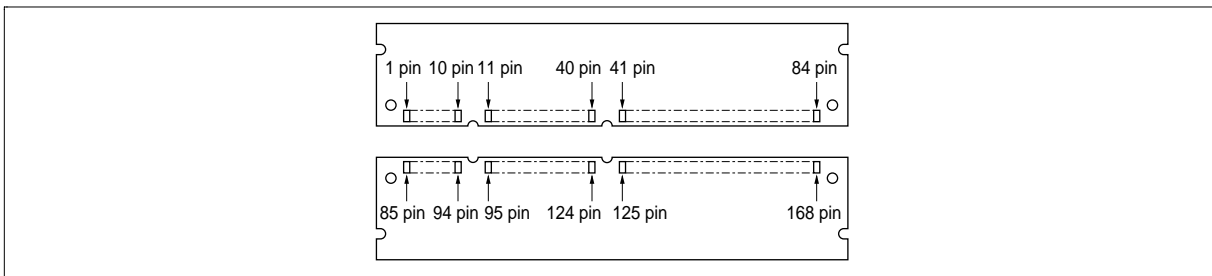

HB52RF1289E2-75B

| Pin No. | Pin name | Pin No. | Pin name | Pin No. | Pin name | Pin No. | Pin name |
|---------|-----------------|---------|-----------------|---------|-----------------|---------|-----------------|
| 1 | V _{SS} | 43 | V _{SS} | 85 | V _{SS} | 127 | V _{SS} |
| 2 | DQ0 | 44 | NC | 86 | DQ32 | 128 | CKE0 |
| 3 | DQ1 | 45 | $\overline{S2}$ | 87 | DQ33 | 129 | $\overline{S3}$ |
| 4 | DQ2 | 46 | DQMB2 | 88 | DQ34 | 130 | DQMB6 |
| 5 | DQ3 | 47 | DQMB3 | 89 | DQ35 | 131 | DQMB7 |
| 6 | V _{CC} | 48 | NC | 90 | V _{CC} | 132 | NC |
| 7 | DQ4 | 49 | V _{CC} | 91 | DQ36 | 133 | V _{CC} |
| 8 | DQ5 | 50 | NC | 92 | DQ37 | 134 | NC |
| 9 | DQ6 | 51 | NC | 93 | DQ38 | 135 | NC |
| 10 | DQ7 | 52 | CB2 | 94 | DQ39 | 136 | CB6 |
| 11 | DQ8 | 53 | CB3 | 95 | DQ40 | 137 | CB7 |
| 12 | V _{SS} | 54 | V _{SS} | 96 | V _{SS} | 138 | V _{SS} |
| 13 | DQ9 | 55 | DQ16 | 97 | DQ41 | 139 | DQ48 |
| 14 | DQ10 | 56 | DQ17 | 98 | DQ42 | 140 | DQ49 |
| 15 | DQ11 | 57 | DQ18 | 99 | DQ43 | 141 | DQ50 |
| 16 | DQ12 | 58 | DQ19 | 100 | DQ44 | 142 | DQ51 |
| 17 | DQ13 | 59 | V _{CC} | 101 | DQ45 | 143 | V _{CC} |
| 18 | V _{CC} | 60 | DQ20 | 102 | V _{CC} | 144 | DQ52 |
| 19 | DQ14 | 61 | NC | 103 | DQ46 | 145 | NC |
| 20 | DQ15 | 62 | NC | 104 | DQ47 | 146 | NC |
| 21 | CB0 | 63 | NC | 105 | CB4 | 147 | REGE |
| 22 | CB1 | 64 | V _{SS} | 106 | CB5 | 148 | V _{SS} |
| 23 | V _{SS} | 65 | DQ21 | 107 | V _{SS} | 149 | DQ53 |
| 24 | NC | 66 | DQ22 | 108 | NC | 150 | DQ54 |
| 25 | NC | 67 | DQ23 | 109 | NC | 151 | DQ55 |
| 26 | V _{CC} | 68 | V _{SS} | 110 | V _{CC} | 152 | V _{SS} |
| 27 | \overline{W} | 69 | DQ24 | 111 | \overline{CE} | 153 | DQ56 |
| 28 | DQMB0 | 70 | DQ25 | 112 | DQMB4 | 154 | DQ57 |
| 29 | DQMB1 | 71 | DQ26 | 113 | DQMB5 | 155 | DQ58 |
| 30 | $\overline{S0}$ | 72 | DQ27 | 114 | $\overline{S1}$ | 156 | DQ59 |
| 31 | NC | 73 | V _{CC} | 115 | \overline{RE} | 157 | V _{CC} |
| 32 | V _{SS} | 74 | DQ28 | 116 | V _{SS} | 158 | DQ60 |
| 33 | A0 | 75 | DQ29 | 117 | A1 | 159 | DQ61 |
| 34 | A2 | 76 | DQ30 | 118 | A3 | 160 | DQ62 |
| 35 | A4 | 77 | DQ31 | 119 | A5 | 161 | DQ63 |

HB52RF1289E2-75B

| Pin No. | Pin name | Pin No. | Pin name | Pin No. | Pin name | Pin No. | Pin name |
|---------|-----------------|---------|-----------------|---------|-----------------|---------|-----------------|
| 36 | A6 | 78 | V _{SS} | 120 | A7 | 162 | V _{SS} |
| 37 | A8 | 79 | CK2 | 121 | A9 | 163 | CK3 |
| 38 | A10 (AP) | 80 | NC | 122 | BA0 | 164 | NC |
| 39 | BA1 | 81 | WP | 123 | A11 | 165 | SA0 |
| 40 | V _{CC} | 82 | SDA | 124 | V _{CC} | 166 | SA1 |
| 41 | V _{CC} | 83 | SCL | 125 | CK1 | 167 | SA2 |
| 42 | CK0 | 84 | V _{CC} | 126 | A12 | 168 | V _{CC} |

Pin Description

| Pin name | Function |
|--------------------|--|
| A0 to A12 | Address input Row address A0 to A12 Column address A0 to A9, A11 |
| BA0/BA1 | Bank select address BA0/BA1 |
| DQ0 to DQ63 | Data input/output |
| CB0 to CB7 | Check bit (Data input/output) |
| S0 to S3 | Chip select input |
| \overline{RE} | Row enable (RAS) input |
| \overline{CE} | Column enable (CAS) input |
| \overline{W} | Write enable input |
| DQMB0 to DQMB7 | Byte data mask |
| CK0 to CK3 | Clock input |
| CKE0 | Clock enable input |
| WP | Write protect for serial PD |
| REGE* ¹ | Register/Buffer enable |
| SDA | Data input/output for serial PD |
| SCL | Clock input for serial PD |
| SA0 to SA2 | Serial address input |
| V _{CC} | Primary positive power supply |
| V _{SS} | Ground |
| NC | No connection |

Note: 1. REGE \geq V_{IH}: Register mode.
REGE \leq V_{IL}: Buffer mode.

Serial PD Matrix*¹

| Byte No. | Function described | Bit7 | Bit6 | Bit5 | Bit4 | Bit3 | Bit2 | Bit1 | Bit0 | Hex value | Comments |
|----------|--|------|------|------|------|------|------|------|------|-----------|---------------------------------------|
| 0 | Number of bytes used by module manufacturer | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 80 | 128 |
| 1 | Total SPD memory size | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 08 | 256 byte |
| 2 | Memory type | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 04 | SDRAM |
| 3 | Number of row addresses bits | 0 | 0 | 0 | 0 | 1 | 1 | 0 | 1 | 0D | 13 |
| 4 | Number of column addresses bits | 0 | 0 | 0 | 0 | 1 | 0 | 1 | 1 | 0B | 11 |
| 5 | Number of banks | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 02 | 2 |
| 6 | Module data width | 0 | 1 | 0 | 0 | 1 | 0 | 0 | 0 | 48 | 72 bit |
| 7 | Module data width (continued) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 00 | 0 (+) |
| 8 | Module interface signal levels | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 01 | LVTTL |
| 9 | SDRAM cycle time (highest CE latency) 7.5 ns | 0 | 1 | 1 | 1 | 0 | 1 | 0 | 1 | 75 | CL = 3 |
| 10 | SDRAM access from Clock (highest CE latency) 5.4 ns | 0 | 1 | 0 | 1 | 0 | 1 | 0 | 0 | 54 | *5 |
| 11 | Module configuration type | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 02 | ECC |
| 12 | Refresh rate/type | 1 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 82 | Normal (7.8125 μs) Self refresh |
| 13 | SDRAM width | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 04 | 64M × 4 |
| 14 | Error checking SDRAM width | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 04 | × 4 |
| 15 | SDRAM device attributes: minimum clock delay for back-to-back random column addresses | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 01 | 1 CLK |
| 16 | SDRAM device attributes: Burst lengths supported | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 0F | 1, 2, 4, 8 |
| 17 | SDRAM device attributes: number of banks on SDRAM device | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 04 | 4 |
| 18 | SDRAM device attributes: CE latency | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 0 | 06 | 2/3 |
| 19 | SDRAM device attributes: S latency | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 01 | 0 |

HB52RF1289E2-75B

| Byte No. | Function described | Bit7 | Bit6 | Bit5 | Bit4 | Bit3 | Bit2 | Bit1 | Bit0 | Hex value | Comments |
|----------|---|------|------|------|------|------|------|------|------|-----------|--------------------------|
| 20 | SDRAM device attributes: W latency | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 01 | 0 |
| 21 | SDRAM device attributes | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 1F | Registered |
| 22 | SDRAM device attributes: General | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 0 | 0E | $V_{CC} \pm 10\%$ |
| 23 | SDRAM cycle time (2nd highest \overline{CE} latency) 10 ns | 1 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | A0 | CL = 2 *5 |
| 24 | SDRAM access from Clock (2nd highest \overline{CE} latency) 6 ns | 0 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 60 | *5 |
| 25 | SDRAM cycle time (3rd highest \overline{CE} latency) Undefined | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 00 | |
| 26 | SDRAM access from Clock (3rd highest \overline{CE} latency) Undefined | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 00 | |
| 27 | Minimum row precharge time | 0 | 0 | 0 | 1 | 0 | 1 | 0 | 0 | 14 | 20 ns |
| 28 | Row active to row active min | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 0F | 15 ns |
| 29 | \overline{RE} to \overline{CE} delay min | 0 | 0 | 0 | 1 | 0 | 1 | 0 | 0 | 14 | 20 ns |
| 30 | Minimum \overline{RE} pulse width | 0 | 0 | 1 | 0 | 1 | 1 | 0 | 1 | 2D | 45 ns |
| 31 | Density of each bank on module | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 80 | 2 bank 512M byte |
| 32 | Address and command signal input setup time | 0 | 0 | 0 | 1 | 0 | 1 | 0 | 1 | 15 | 1.5 ns*5 |
| 33 | Address and command signal input hold time | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 08 | 0.8 ns*5 |
| 34 | Data signal input setup time | 0 | 0 | 0 | 1 | 0 | 1 | 0 | 1 | 15 | 1.5 ns*5 |
| 35 | Data signal input hold time | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 08 | 0.8 ns*5 |
| 36 to 61 | Superset information | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 00 | Future use |
| 62 | SPD data revision code | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 02 | JEDEC2 |
| 63 | Checksum for bytes 0 to 62 | 1 | 0 | 1 | 0 | 1 | 1 | 0 | 1 | AD | 173 |
| 64 | Manufacturer's JEDEC ID code | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 07 | HITACHI |
| 65 to 71 | Manufacturer's JEDEC ID code | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 00 | |
| 72 | Manufacturing location | x | x | x | x | x | x | x | x | xx | *2 (ASCII- 8bit code) |

HB52RF1289E2-75B

| Byte No. | Function described | Bit7 | Bit6 | Bit5 | Bit4 | Bit3 | Bit2 | Bit1 | Bit0 | Hex value | Comments |
|-----------|--|-------------------|------|------|------|------|------|------|------|-----------|-----------------|
| 73 | Manufacturer's part number | 0 | 1 | 0 | 0 | 1 | 0 | 0 | 0 | 48 | H |
| 74 | Manufacturer's part number | 0 | 1 | 0 | 0 | 0 | 0 | 1 | 0 | 42 | B |
| 75 | Manufacturer's part number | 0 | 0 | 1 | 1 | 0 | 1 | 0 | 1 | 35 | 5 |
| 76 | Manufacturer's part number | 0 | 0 | 1 | 1 | 0 | 0 | 1 | 0 | 32 | 2 |
| 77 | Manufacturer's part number | 0 | 1 | 0 | 1 | 0 | 0 | 1 | 0 | 52 | R |
| 78 | Manufacturer's part number | 0 | 1 | 0 | 0 | 0 | 1 | 1 | 0 | 46 | F |
| 79 | Manufacturer's part number | 0 | 0 | 1 | 1 | 0 | 0 | 0 | 1 | 31 | 1 |
| 80 | Manufacturer's part | 0 | 0 | 1 | 1 | 0 | 0 | 1 | 0 | 32 | 2 |
| 81 | Manufacturer's part number | 0 | 0 | 1 | 1 | 1 | 0 | 0 | 0 | 38 | 8 |
| 82 | Manufacturer's part number | 0 | 0 | 1 | 1 | 1 | 0 | 0 | 1 | 39 | 9 |
| 83 | Manufacturer's part number | 0 | 1 | 0 | 0 | 0 | 1 | 0 | 1 | 45 | E |
| 84 | Manufacturer's part number | 0 | 0 | 1 | 1 | 0 | 0 | 1 | 0 | 32 | 2 |
| 85 | Manufacturer's part number | 0 | 0 | 1 | 0 | 1 | 1 | 0 | 1 | 2D | — |
| 86 | Manufacturer's part number | 0 | 0 | 1 | 1 | 0 | 1 | 1 | 1 | 37 | 7 |
| 87 | Manufacturer's part number | 0 | 0 | 1 | 1 | 0 | 1 | 0 | 1 | 35 | 5 |
| 88 | Manufacturer's part number | 0 | 1 | 0 | 0 | 0 | 0 | 1 | 0 | 42 | B |
| 89 | Manufacturer's part number | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 20 | (Space) |
| 90 | Manufacturer's part number | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 20 | (Space) |
| 91 | Revision code | 0 | 0 | 1 | 1 | 0 | 0 | 0 | 0 | 30 | Initial |
| 92 | Revision code | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 20 | (Space) |
| 93 | Manufacturing date | × | × | × | × | × | × | × | × | xx | Year code (BCD) |
| 94 | Manufacturing date | × | × | × | × | × | × | × | × | xx | Week code (BCD) |
| 95 to 98 | Assembly serial number | *3 | | | | | | | | | |
| 99 to 125 | Manufacturer specific data | — — — — — — — — — | | | | | | | | | *4 |
| 126 | Reserved (Intel specification frequency) | 0 | 1 | 1 | 0 | 0 | 1 | 0 | 0 | 64 | |
| 127 | Reserved (Intel specification \overline{CE} # latency support) | 1 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 87 | |

- Notes:
1. All serial PD data are not protected. 0: Serial data, "driven Low", 1: Serial data, "driven High".
 2. Byte72 is manufacturing location code. (ex: In case of Japan, byte72 is 4AH. 4AH shows "J" on ASCII code.)
 3. Bytes 95 through 98 are assembly serial number.
 4. All bits of 99 through 125 are not defined ("1" or "0").
 5. These specifications are defined based on component specification, not module.

Absolute Maximum Ratings

| Parameter | Symbol | Value | Unit | Note |
|---|-----------|---|------|------|
| Voltage on any pin relative to V_{SS} | V_T | -0.5 to $V_{CC} + 0.5$ (≤ 4.6 (max)) | V | 1 |
| Supply voltage relative to V_{SS} | V_{CC} | -0.5 to +4.6 | V | 1 |
| Short circuit output current | I_{out} | 50 | mA | |
| Power dissipation | P_T | 18.0 | W | |
| Operating temperature | T_{opr} | 0 to +55 | °C | |
| Storage temperature | T_{stg} | -50 to +100 | °C | |

Note: 1. Respect to V_{SS}

DC Operating Conditions ($T_a = 0$ to +55°C)

| Parameter | Symbol | Min | Max | Unit | Notes |
|---------------------|----------|-----|----------|------|-------|
| Supply voltage | V_{CC} | 3.0 | 3.6 | V | 1 |
| | V_{SS} | 0 | 0 | V | 3 |
| Input high voltage | V_{IH} | 2.0 | V_{CC} | V | 1, 4 |
| Input low voltage | V_{IL} | 0 | 0.8 | V | 1, 5 |
| Ambient illuminance | — | — | 100 | lx | |

- Notes: 1. All voltage referred to V_{SS}
 2. The supply voltage with all V_{CC} and $V_{CC}Q$ pins must be on the same level.
 3. The supply voltage with all V_{SS} and $V_{SS}Q$ pins must be on the same level.
 4. V_{IH} (max) = $V_{CC} + 2.0$ V for pulse width ≤ 3 ns at V_{CC} .
 5. V_{IL} (min) = $V_{SS} - 2.0$ V for pulse width ≤ 3 ns at V_{SS} .

HB52RF1289E2-75B

DC Characteristics ($T_a = 0$ to 55°C , $V_{CC} = 3.3 \text{ V} \pm 0.3 \text{ V}$, $V_{SS} = 0 \text{ V}$)

| Parameter | Symbol | HB52RF1289E2-75B | | Unit | Test conditions | Notes |
|---|-------------|------------------|------|---------------|---|---------|
| | | Min | Max | | | |
| Operating current | I_{CC1} | — | 3215 | mA | Burst length = 1 $t_{RC} = \text{min}$ | 1, 2, 3 |
| Standby current in power down | I_{CC2P} | — | 803 | mA | $\text{CKE} = V_{IL}$, $t_{CK} = 12 \text{ ns}$ | 6 |
| Standby current in power down (input signal stable) | I_{CC2PS} | — | 767 | mA | $\text{CKE} = V_{IL}$, $t_{CK} = \infty$ | 7 |
| Standby current in non power down | I_{CC2N} | — | 1415 | mA | CKE , $\overline{\text{S}} = V_{IH}$, $t_{CK} = 12 \text{ ns}$ | 4 |
| Active standby current in power down | I_{CC3P} | — | 839 | mA | $\text{CKE} = V_{IL}$, $t_{CK} = 12 \text{ ns}$ | 1, 2, 6 |
| Active standby current in non power down | I_{CC3N} | — | 1775 | mA | CKE , $\overline{\text{S}} = V_{IH}$, $t_{CK} = 12 \text{ ns}$ | 1, 2, 4 |
| Burst operating current | I_{CC4} | — | 3575 | mA | $t_{CK} = \text{min}$, $\text{BL} = 4$ | 1, 2, 5 |
| Refresh current | I_{CC5} | — | 5195 | mA | $t_{RC} = \text{min}$ | 3 |
| Self refresh current | I_{CC6} | — | 803 | mA | $V_{IH} \geq V_{CC} - 0.2 \text{ V}$ $V_{IL} \leq 0.2 \text{ V}$ | 8 |
| Input leakage current | I_{LI} | -10 | 10 | μA | $0 \leq V_{in} \leq V_{CC}$ | |
| Output leakage current | I_{LO} | -10 | 10 | μA | $0 \leq V_{out} \leq V_{CC}$ DQ = disable | |
| Output high voltage | V_{OH} | 2.4 | — | V | $I_{OH} = -4 \text{ mA}$ | |
| Output low voltage | V_{OL} | — | 0.4 | V | $I_{OL} = 4 \text{ mA}$ | |

Notes: 1. I_{CC} depends on output load condition when the device is selected. $I_{CC}(\text{max})$ is specified at the output open condition.

2. One bank operation.
3. Input signals are changed once per one clock.
4. Input signals are changed once per two clocks.
5. Input signals are changed once per four clocks.
6. After power down mode, CK operating current.
7. After power down mode, no CK operating current.
8. After self refresh mode set, self refresh current.

HB52RF1289E2-75B

Capacitance ($T_a = 25^\circ\text{C}$, $V_{CC} = 3.3\text{ V} \pm 0.3\text{ V}$)

| Parameter | Symbol | Max | Unit | Notes |
|--|------------|-----|------|------------|
| Input capacitance (Address) | C_{I1} | 25 | pF | 1, 2, 4 |
| Input capacitance (\overline{RE} , \overline{CE} , \overline{W}) | C_{I2} | 25 | pF | 1, 2, 4 |
| Input capacitance (CKE) | C_{I3} | 45 | pF | 1, 2, 4 |
| Input capacitance (\overline{S}) | C_{I4} | 20 | pF | 1, 2, 4 |
| Input capacitance (CK) | C_{I5} | 45 | pF | 1, 2, 4 |
| Input capacitance (DQMB) | C_{I6} | 20 | pF | 1, 2, 4 |
| Input/Output capacitance (DQ) | $C_{I/O1}$ | 25 | pF | 1, 2, 3, 4 |

- Notes: 1. Capacitance measured with Boonton Meter or effective capacitance measuring method.
 2. Measurement condition: $f = 1\text{ MHz}$, 1.4 V bias, 200 mV swing.
 3. $DQMB = V_{IH}$ to disable Data-out.
 4. This parameter is sampled and not 100% tested.

AC Characteristics ($T_a = 0\text{ to }55^\circ\text{C}$, $V_{CC} = 3.3\text{ V} \pm 0.3\text{ V}$, $V_{SS} = 0\text{ V}$)

HB52RF1289E2-75B

| | |
|-----------------------|-----------------------|
| PC133 | PC100 |
| CE latency = 4 | CE latency = 3 |

| Parameter | Symbol | PC100 | | Min | Max | Min | Max | Unit | Notes |
|------------------------------------|------------|--------|-----|-----|-----|-----|-----|---------|-------|
| | | Symbol | Min | | | | | | |
| System clock cycle time | t_{CK} | Tclk | 7.5 | — | 10 | — | ns | 1 | |
| CK high pulse width | t_{CKH} | Tch | 3.4 | — | 4 | — | ns | 1 | |
| CK low pulse width | t_{CKL} | Tcl | 3.4 | — | 4 | — | ns | 1 | |
| Access time from CK | t_{AC} | Tac | — | 6.3 | — | 6.9 | ns | 1, 2 | |
| Data-out hold time | t_{OH} | Toh | 1.8 | — | 2.1 | — | ns | 1, 2 | |
| CK to Data-out low impedance | t_{LZ} | | 1.1 | — | 1.1 | — | ns | 1, 2, 3 | |
| CK to Data-out high impedance | t_{HZ} | | — | 6.3 | — | 6.9 | ns | 1, 4 | |
| Data-in setup time | t_{DS} | Tsi | 2.4 | — | 2.9 | — | ns | 1 | |
| Data in hold time | t_{DH} | Thi | 1.7 | — | 1.9 | — | ns | 1 | |
| Address setup time | t_{AS} | Tsi | 1.9 | — | 2.6 | — | ns | 1 | |
| Address hold time | t_{AH} | Thi | 1.5 | — | 1.6 | — | ns | 1 | |
| CKE setup time | t_{CES} | Tsi | 1.9 | — | 2.6 | — | ns | 1, 5 | |
| CKE setup time for power down exit | t_{CESP} | Tpde | 1.9 | — | 2.6 | — | ns | 1 | |
| CKE hold time | t_{CEH} | Thi | 1.5 | — | 1.6 | — | ns | 1 | |

HB52RF1289E2-75B


AC Characteristics ($T_a = 0$ to 55°C , $V_{CC} = 3.3 \text{ V} \pm 0.3 \text{ V}$, $V_{SS} = 0 \text{ V}$) (cont)

| Parameter | Symbol | PC100 | | HB52RF1289E2-75B | | Unit | Notes | |
|--|-----------|--------|------|------------------|-----|--------|-------|------|
| | | Symbol | Min | Max | Min | | | Max |
| Command setup time | t_{CS} | Tsi | 1.9 | — | 2.6 | — | ns | 1 |
| Command hold time | t_{CH} | Thi | 1.5 | — | 1.6 | — | ns | 1, 5 |
| Ref/Active to Ref/Active command period | t_{RC} | Trc | 67.5 | — | 70 | — | ns | 1 |
| Active to precharge command period | t_{RAS} | Tras | 45 | 120000 | 50 | 120000 | ns | 1 |
| Active command to column command (same bank) | t_{RCD} | Trcd | 20 | — | 20 | — | ns | 1 |
| Precharge to active command period | t_{RP} | Trp | 20 | — | 20 | — | ns | 1 |
| Write recovery or data-in to precharge lead time | t_{DPL} | Tdpl | 7.5 | — | 10 | — | ns | 1 |
| Active (a) to Active (b) command period | t_{RRD} | Trrd | 15 | — | 20 | — | ns | 1 |
| Transition time (rise to fall) | t_T | | 1 | 5 | 1 | 5 | ns | |
| Refresh period | t_{REF} | | — | 64 | — | 64 | ms | |

- Notes: 1. AC measurement assumes $t_T = 1 \text{ ns}$. Reference level for timing of input signals is 1.5 V.
 2. Access time is measured at 1.5 V. Load condition is $C_L = 50 \text{ pF}$.
 3. t_{LZ} (min) defines the time at which the outputs achieves the low impedance state.
 4. t_{HZ} (max) defines the time at which the outputs achieves the high impedance state.
 5. t_{CES} defines CKE setup time to CK rising edge except power down exit command.

Test Conditions

- Input and output timing reference levels: 1.5 V
- Input waveform and output load: See following figures
- Ambient illuminance: Under 100 lx

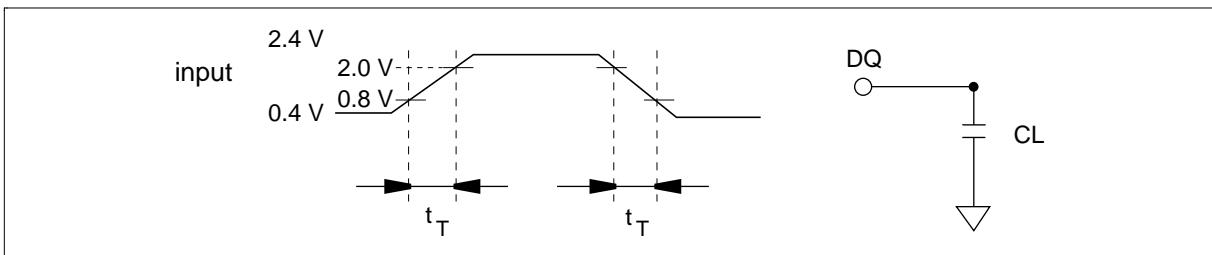

Relationship Between Frequency and Minimum Latency

| | | HB52RF1289E2-75B | | | |
|--|------------|-------------------|-------------------|----|-------------------------------|
| Parameter | | 133 | 100 | | |
| Frequency (MHz) | | CE latency = 4 | CE latency = 3 | | |
| t_{CK} (ns) | Symbol | PC100 Symbol | 7.5 | 10 | Notes |
| Active command to column command (same bank) | I_{RCD} | | 3 | 2 | 1 |
| Active command to active command (same bank) | I_{RC} | | 9 | 7 | = [$I_{RAS} + I_{RP}$] 1 |
| Active command to precharge command (same bank) | I_{RAS} | | 6 | 5 | 1 |
| Precharge command to active command (same bank) | I_{RP} | | 3 | 2 | 1 |
| Write recovery or data-in to precharge command (same bank) | I_{DPL} | Tdpl | 1 | 1 | 1 |
| Active command to active command (different bank) | I_{RRD} | | 2 | 2 | 1 |
| Self refresh exit time | I_{SREX} | Tsrx | 2 | 2 | 2 |
| Last data in to active command (Auto precharge, same bank) | I_{APW} | Tdal | 4 | 3 | = [$I_{DPL} + I_{RP}$] |
| Self refresh exit to command input | I_{SEC} | | 9 | 7 | = [I_{RC}] 3 |
| Precharge command to high impedance | I_{HZP} | Troh | 4 | 3 | |
| Last data out to active command (auto precharge) (same bank) | I_{APR} | | 0 | 0 | |
| Last data out to precharge (early precharge) | I_{EP} | | -3 | -2 | |
| Column command to column command | I_{CCD} | Tccd | 1 | 1 | |
| Write command to data in latency | I_{WCD} | Tdwd | 1 | 1 | |
| DQMB to data in | I_{DID} | Tdqm | 1 | 1 | |
| DQMB to data out | I_{DOD} | Tdqz | 3 | 3 | |
| CKE to CK disable | I_{CLE} | Tcke | 2 | 2 | |
| Register set to active command | I_{RSA} | Tmrd | 1 | 1 | |
| \bar{S} to command disable | I_{CDD} | | 0 | 0 | |
| Power down exit to command input | I_{PEC} | | 1 | 1 | |

- Notes: 1. I_{RCD} to I_{RRD} are recommended value.
 2. Be valid [DESL] or [NOP] at next command of self refresh exit.
 3. Except [DESL] and [NOP]

HB52RF1289E2-75B

Pin Functions

CK0 to CK3 (input pin): CK is the master clock input to this pin. The other input signals are referred at CK rising edge.

$\overline{S0}$ to $\overline{S3}$ (input pin): When \overline{S} is Low, the command input cycle becomes valid. When \overline{S} is High, all inputs are ignored. However, internal operations (bank active, burst operations, etc.) are held.

\overline{RE} , \overline{CE} and \overline{W} (input pins): Although these pin names are the same as those of conventional DRAMs, they function in a different way. These pins define operation commands (read, write, etc.) depending on the combination of their voltage levels. For details, refer to the command operation section.

A0 to A12 (input pins): Row address (AX0 to AX12) is determined by A0 to A12 level at the bank active command cycle CK rising edge. Column address (AY0 to AY9, AY11) is determined by A0 to A9, A11 level at the read or write command cycle CK rising edge. And this column address becomes burst access start address. A10 defines the precharge mode. When A10 = High at the precharge command cycle, all banks are precharged. But when A10 = Low at the precharge command cycle, only the bank that is selected by BA0/BA1 (BA) is precharged.

BA0/BA1 (input pin): BA0/BA1 are bank select signal (BA). The memory array is divided into bank 0, bank 1, bank 2 and bank 3. If BA0 is Low and BA1 is Low, bank 0 is selected. If BA0 is High and BA1 is Low, bank 1 is selected. If BA0 is Low and BA1 is High, bank 2 is selected. If BA0 is High and BA1 is High, bank 3 is selected.

CKE0 (input pin): This pin determines whether or not the next CK is valid. If CKE is High, the next CK rising edge is valid. If CKE is Low, the next CK rising edge is invalid. This pin is used for power-down and clock suspend modes.

DQMB0 to DQMB7 (input pins): Read operation: If DQMB is High, the output buffer becomes High-Z. If the DQMB is Low, the output buffer becomes Low-Z.

Write operation: If DQMB is High, the previous data is held (the new data is not written). If DQMB is Low, the data is written.

DQ0 to DQ63, CB0 to CB7 (input/output pins): Data is input to and output from these pins.

V_{CC} (power supply pins): 3.3 V is applied.


V_{SS} (power supply pins): Ground is connected.

REGE (input pins): If REGE is High, the register is "registered" mode. If REGE is Low, the register is "buffered" mode.

Detailed Operation Part

Refer to the HM5225165B/HM5225805B/HM5225405B-75/A6/B6 datasheet (E0082H).

Physical Outline

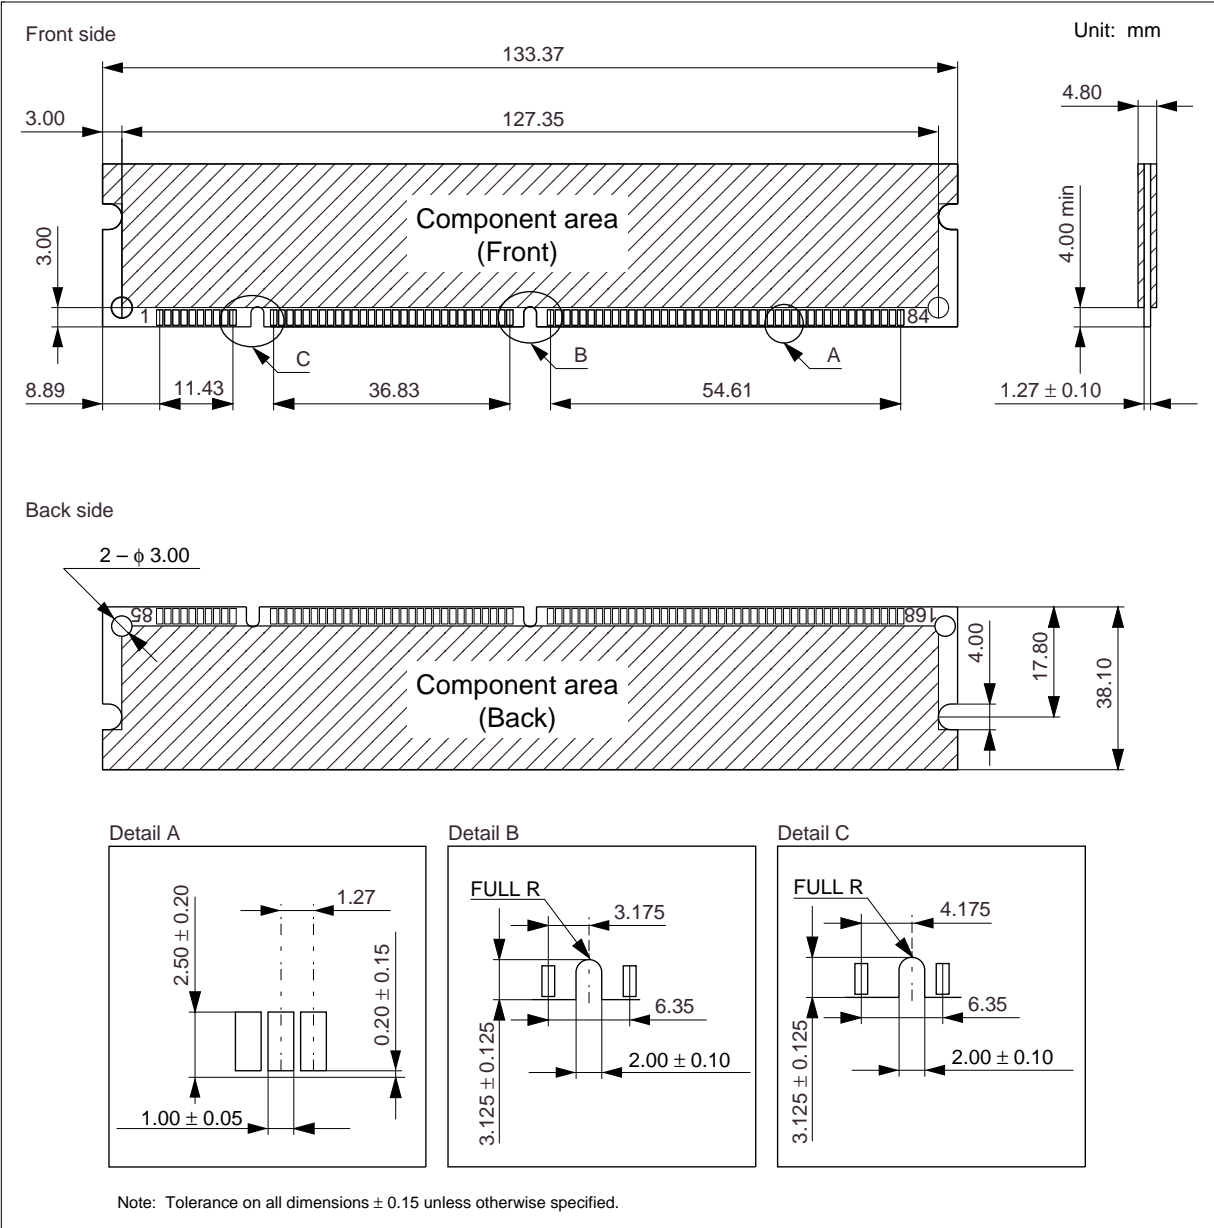

Cautions

1. Elpida Memory, Inc. neither warrants nor grants licenses of any rights of Elpida Memory, Inc.'s or any third party's patent, copyright, trademark, or other intellectual property rights for information contained in this document. Elpida Memory, Inc. bears no responsibility for problems that may arise with third party's rights, including intellectual property rights, in connection with use of the information contained in this document.
2. Products and product specifications may be subject to change without notice. Confirm that you have received the latest product standards or specifications before final design, purchase or use.
3. Elpida Memory, Inc. makes every attempt to ensure that its products are of high quality and reliability. However, contact Elpida Memory, Inc. before using the product in an application that demands especially high quality and reliability or where its failure or malfunction may directly threaten human life or cause risk of bodily injury, such as aerospace, aeronautics, nuclear power, combustion control, transportation, traffic, safety equipment or medical equipment for life support.
4. Design your application so that the product is used within the ranges guaranteed by Elpida Memory, Inc. particularly for maximum rating, operating supply voltage range, heat radiation characteristics, installation conditions and other characteristics. Elpida Memory, Inc. bears no responsibility for failure or damage when used beyond the guaranteed ranges. Even within the guaranteed ranges, consider normally foreseeable failure rates or failure modes in semiconductor devices and employ systemic measures such as fail-safes, so that the equipment incorporating Elpida Memory, Inc. product does not cause bodily injury, fire or other consequential damage due to operation of the Elpida Memory, Inc. product.
5. This product is not designed to be radiation resistant.
6. No one is permitted to reproduce or duplicate, in any form, the whole or part of this document without written approval from Elpida Memory, Inc..
7. Contact Elpida Memory, Inc. for any questions regarding this document or Elpida Memory, Inc. semiconductor products.

©Elpida Memory, Inc.2001