


REV.	CHANGE CONTENT	BY	DATE

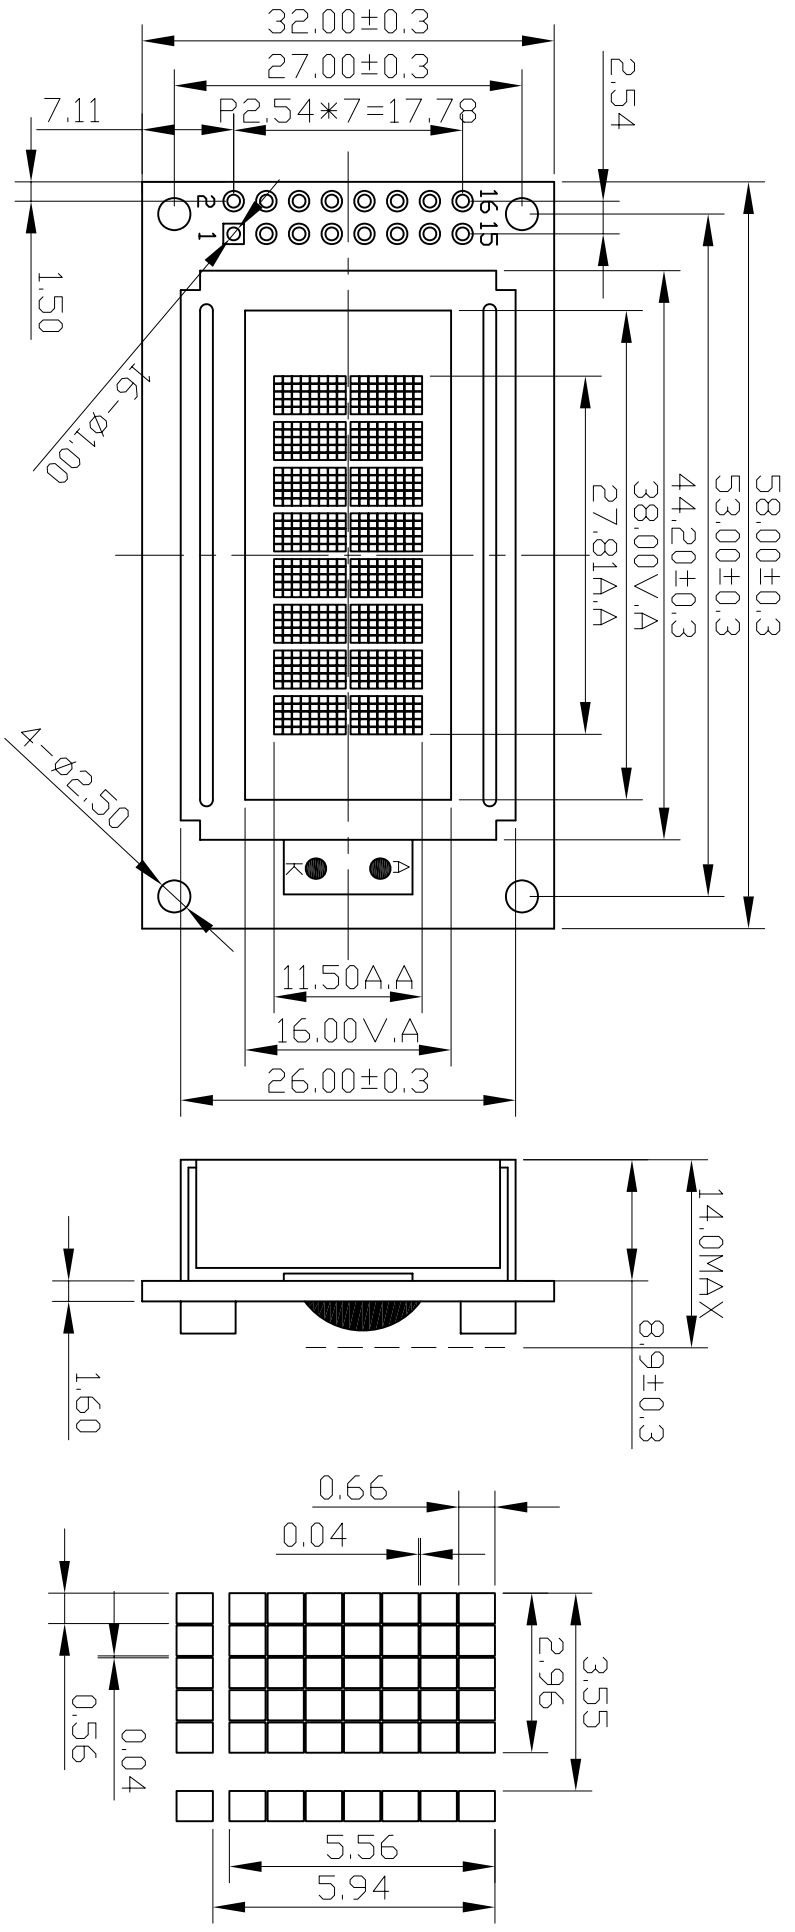

NOTE:

1. DISPLAY TYPE: STN-Y/G-POSITIVE
2. DISPLAY MODE: TRANSPARENT
3. DRIVE METHOD: 1/16 DUTY, 1/5 BIAS, 4.6V Vop, 5V VDD
4. VIEWING DIR.: 6:00
5. OP₂ TEMP.: -20°C~70°C
6. ST TEMP.: -30°C~80°C
7. BACKLIGHT: COLOR-Y/G, 4.1±0.2V, 60mA, MIN.80 CD/m²
8. DRIVER IC: S6A0069

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
SYMBOL	VDD	GND	VD	RS	R/W	E	D0	D1	D2	D3	D4	D5	D6	D7	LED+	LED-

TOLERANCE		HTDISPLAY CO., LTD.		DRAWING No. : HC080201C-YF62L-VA	
>0~6	±0.10	DESIGN	ZOUYS	05.12.28	STANDARD
>6~80	±0.20	CHECKED			TECHNOLOGY
>80~240	±0.30	APPROVED			Q.A
>240~400	±0.50				
// 1.0 @ ±0.10					
FILE NO. :				REV. : A	SCALE : -
DRAWING TITLE: LCM DRAWING				PROJECTION:	UNIT : mm
					SHEET : 1/1