




HC114E

APPLICATIONS

Switching Circuit , Interface Circuit.

ABSOLUTE MAXIMUM RATINGS ($T_a=25$)

- T_{stg} —Storage Temperature..... -55~150
- T_j —Junction Temperature.....150
- P_C —Collector Dissipation.....300mW
- V_{CBO} —Collector-Base Voltage.....50V
- V_{CEO} —Collector-Emitter Voltage.....50V
- V_{EBO} —Emitter-Base Voltage..... 10V
- I_C —Collector Current.....-100mA

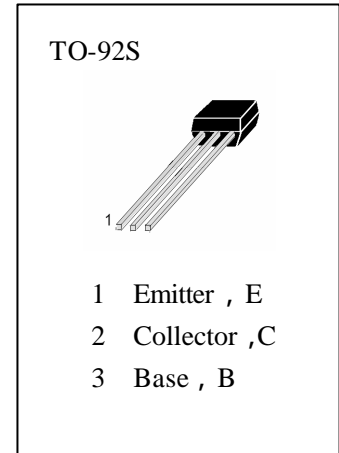

ELECTRICAL CHARACTERISTICS ($T_a=25$)

| Symbol | Characteristics | Min | Typ | Max | Unit | Test Conditions |
|---------------|---------------------------------------|-----|-----|-----|---------|-------------------------|
| BV_{CBO} | Collector-Base Breakdown Voltage | 50 | | | V | $I_C=10 \mu A, I_E=0$ |
| BV_{CEO} | Collector-Emitter Breakdown Voltage | 50 | | | V | $I_C=0.1mA, I_B=0$ |
| I_{CBO} | Collector Cut-off Current | | | 0.1 | μA | $V_{CB}=40V, I_E=0$ |
| I_{CEO} | Collector Cut-off Current | | | 0.5 | μA | $V_{CE}=40V, I_B=0$ |
| I_{EBO} | Emitter Cut-off Current | 195 | 250 | 360 | μA | $V_{EB}=5V, I_C=0$ |
| H_{FE} | DC Current Gain | 30 | | | | $V_{CE}=5V, I_C=5mA$ |
| $V_{CE(sat)}$ | Collector- Emitter Saturation Voltage | | 0.1 | 0.3 | V | $I_C=10mA, I_B=0.5mA$ |
| V_I (off) | Input Off Voltage | 0.8 | 1.1 | 1.5 | V | $V_{CE}=5V, I_C=0.1mA$ |
| V_I (on) | Input On Voltage | 1.0 | 2.0 | 4.0 | V | $V_{CE}=0.2V, I_C=10mA$ |
| R1 | Input Resistor | 7.0 | 10 | 13 | Kohm | |
| R2/R1 | Resistor Ratio | 0.8 | 1.0 | 1.2 | | |
| ft | Current Gain-Bandwidth Product | | 250 | | MHZ | $V_{CE}=-10V, I_C=-5mA$ |



●Electrical characteristic curves

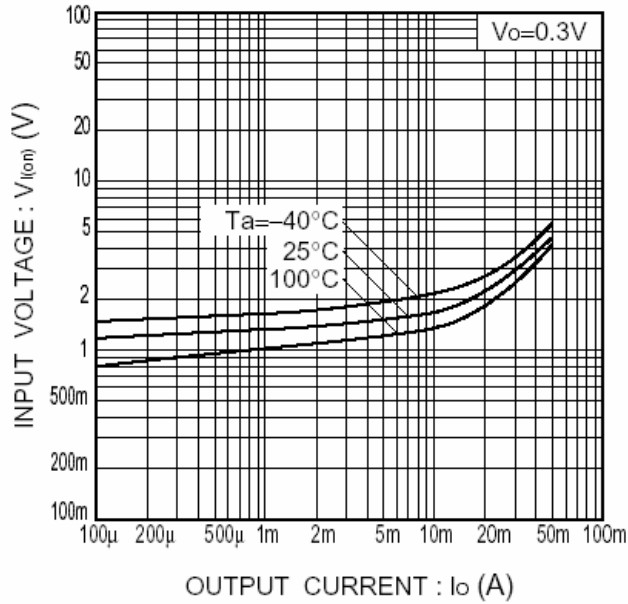


Fig.1 Input voltage vs. output current (ON characteristics)

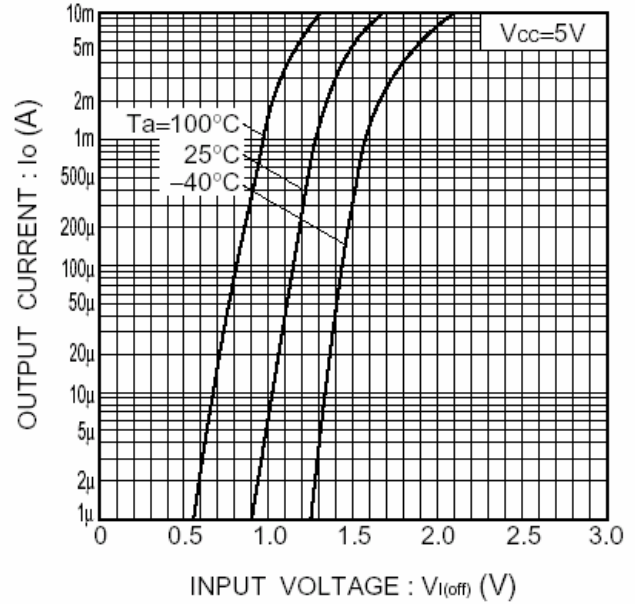


Fig.2 Output current vs. input voltage (OFF characteristics)

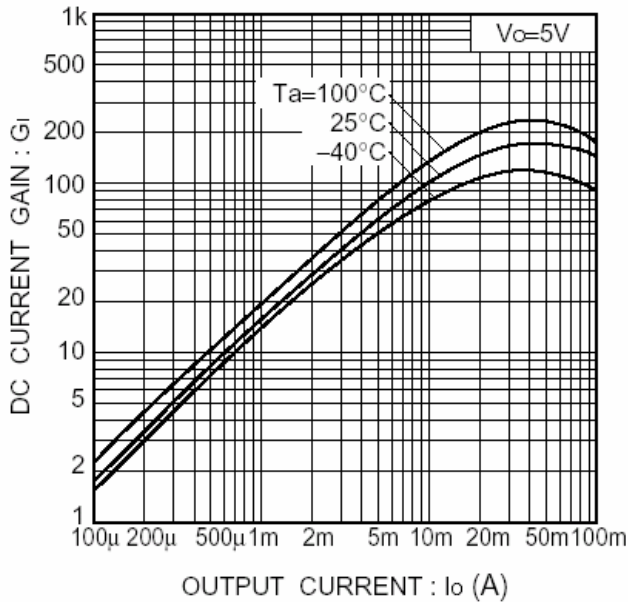


Fig.3 DC current gain vs. output current

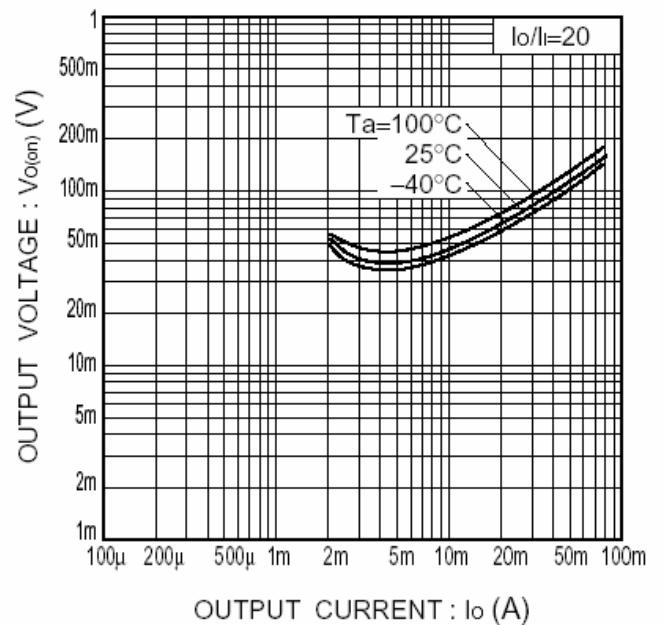


Fig.4 Output voltage vs. output current