

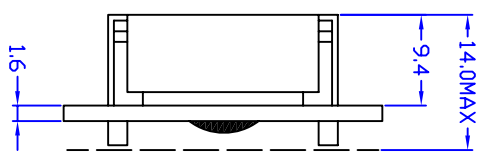


REV.	CHANGE CONTENT	BY	DATE

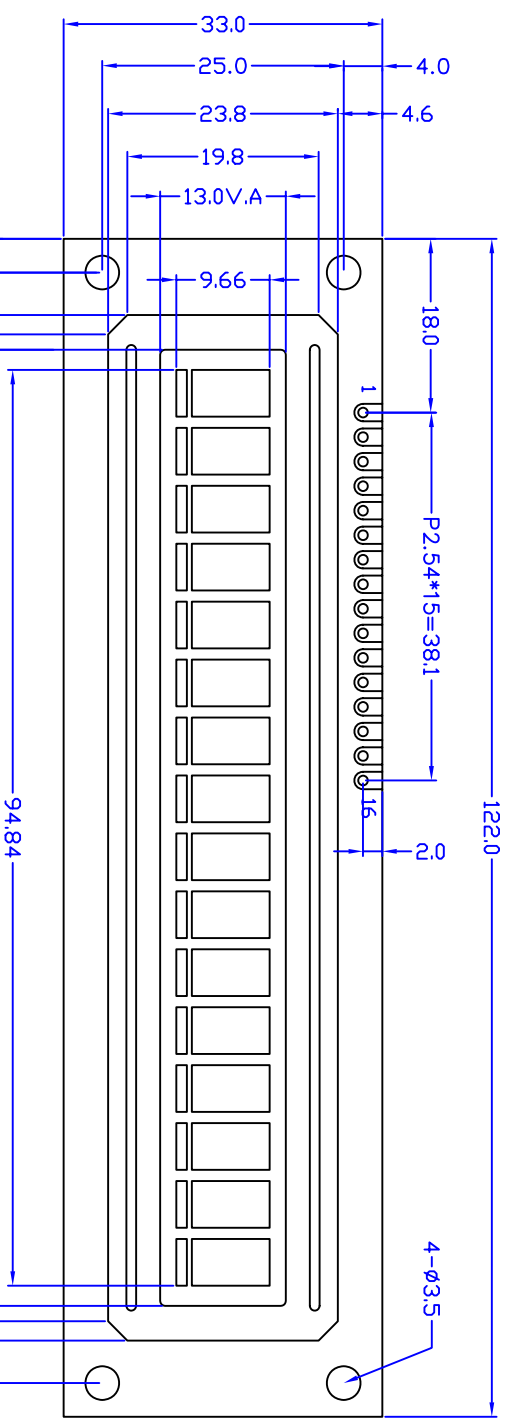

PIN	1	2	3	4	5	6	7	15	16
	VSS	VDD	V0	RS	R/W	E	DB0-DB7	A	K

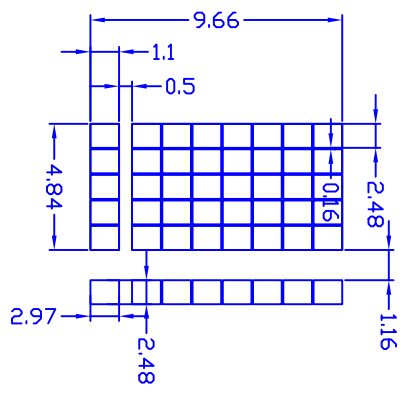

NOTE:

1. DISPLAY TYPE: STN-Y/G-POSITIVE
2. DISPLAY MODE: TRANSFLECTIVE
3. DRIVE METHOD: 1/16 DUTY, 1/5 BIAS, 4.7V Vop, 5V VDD
4. VIEWING DIR.: 6:00
5. OP. TEMP.: -10°C~50°C
6. ST. TEMP.: -20°C~60°C
7. BACKLIGHT: COLOR-Y/G,5.0±0.2V, 160mA,MIN.80 CD/m²
8. DRIVER IC:S6A0069



HTDISPLAY CO., LTD.

DRAWING No. : HC160102C-YF6IL-VA
DRAWING TITLE: LCM DRAWING

TOLERANCE	DESIGN	STANDARD	REV. : A	SCALE : -
>0~6 ±0.10	LZM	06.02.21	PROJECTION:	UNIT : mm
>6~80 ±0.20	CHECKED	TECHNOLOGY	PROJECTION:	SHEET : 1/1
>80~240 ±0.30	APPROVED	Q.A	PROJECTION:	
>240~400 ±0.50				
// 1.0 ±0.10				