

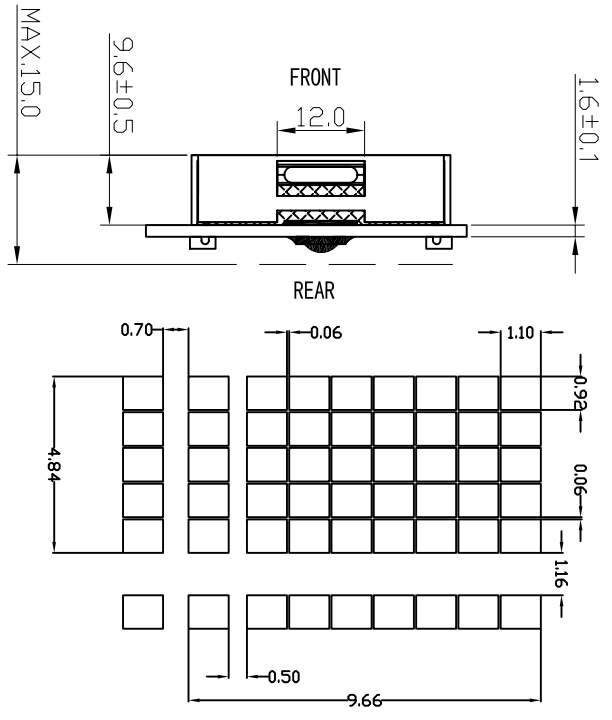


REV.	CHANGE CONTENT	BY	DATE

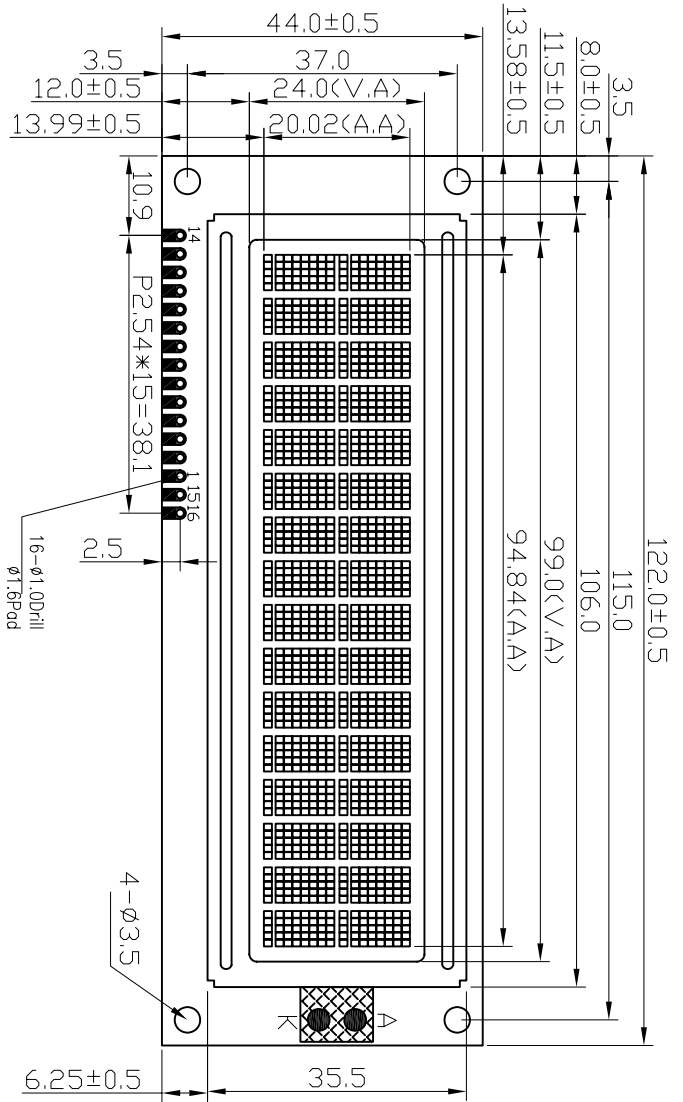

- NOTE:
1. DISPLAY TYPE: STN-Y/G-POSITIVE
  2. DISPLAY MODE: TRANSMISSIVE
  3. DRIVE METHOD: 1/16 DUTY, 1/5 BIAS, 4.8V Vop, 5V VDD
  4. VIEWING DIR.: 6:00
  5. OP. TEMP.: -20°C~70°C
  6. ST. TEMP.: -30°C~80°C
  7. BACKLIGHT: COLOR-Y/G, Vop-4.2V, MIN.80 CD/m<sup>2</sup>
  8. DRIVER IC:S6A0069,S6A0065

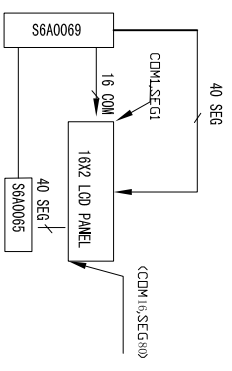

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
SYMBOL	GND	VDD	V0	RS	R/W	E	DD	D1	D2	D3	D4	D5	D6	D7	NC/LED+	NC/LED-

TOLERANCE	>0~6 ±0.10	>6~80 ±0.20	>80~240 ±0.30	>240~400 ±0.50	// 1.0 ±0.10
DESIGN	WANG RYM	06.12.24	STANDARD	TECHNOLOGY	Q.A
CHECKED					
APPROVED					
FILE NO.:	8	REV. : A	SCALE : -	UNIT : mm	SHEET : 1/1
DRAWING NO. :	HCI60203C-Y162L-VB	DRAWING TITLE :	LCM DRAWING		

HTDISPLAY CO., LTD.