
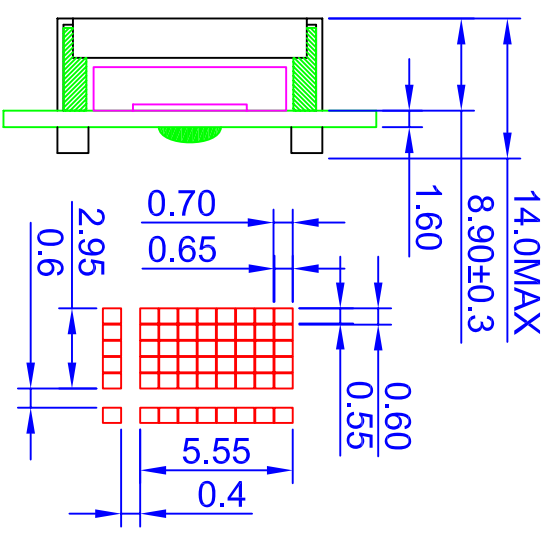


REV.	CHANGE CONTENT	BY	DATE

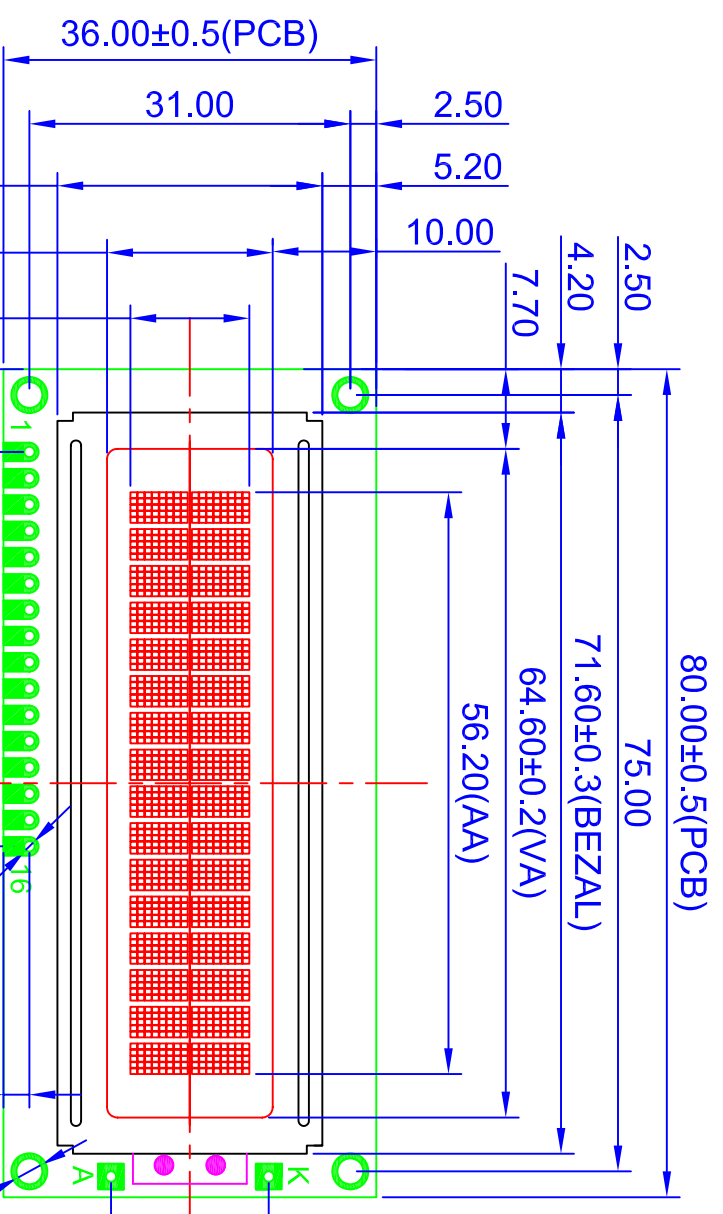

NOTE:  
 1.DISPLAY TYPE : STN, GREY, POSITIVE  
 2.VIEWING DIRECTION: 6:00  
 3.POLARIZER MODE: TRANSFLECTIVE  
 4.LCD DRIVE METHOD: 1/16 DUTY, 1/5 BIAS, VOP=4.6V  
 5.OPERATING TEMP: -20°C~+70°C  
 6.STORAGE TEMP: -30°C~+80°C  
 7.POWER SUPPLY FOR LOGIC: 5.0V  
 8.LCD CONTROLLER: S6A0069, Hebrew Font  
 9.BACKLIGHT: Y/G, 4.2V, 130mA, 26 Dices

NO.	PIN NAME	DESCRIPTION
1	VSS	POWER GROUND
2	VDD	POWER SUPPLY FOR LOGIC
3	V0	POWER SUPPLY FOR LCD
4	RS	Register select. H:Data, L:Instruction
5	R/W	Read/Write Select. H:Read, L:Write
6	E	Read/write enable signal.
7-14	D0-D7	Data bus.
15	LED+	POWER SUPPLY FOR LED+ (+4.2V)
16	LED-	POWER SUPPLY FOR LED- (0V)

**HTDISPLAY CO., LTD.**

DRAWING No.: HC160214C-GF62I-VA  
 DRAWING TITLE: LCM Drawing  
 FILE NO.: 8

TOLERANCE
>0~6 ±0.10
>6~80 ±0.20
>80~240 ±0.30
>240~400 ±0.50
// L ⊙ ±0.10

DESIGN	JHG
CHECKED	
APPROVED	

STANDARD	20061113
TECHNOLOGY	
Q. A	

REV.	B	SCALE	-
PROJECTION:		UNIT	mm
SHEET	1/3		