
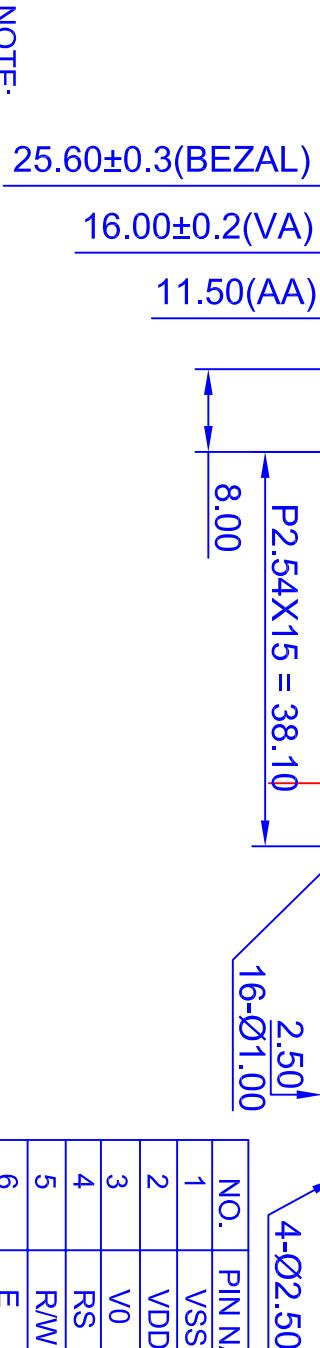
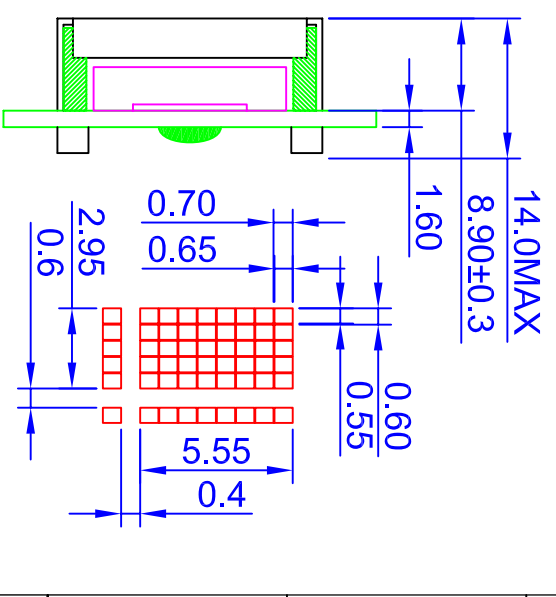


REV.	CHANGE CONTENT	BY	DATE

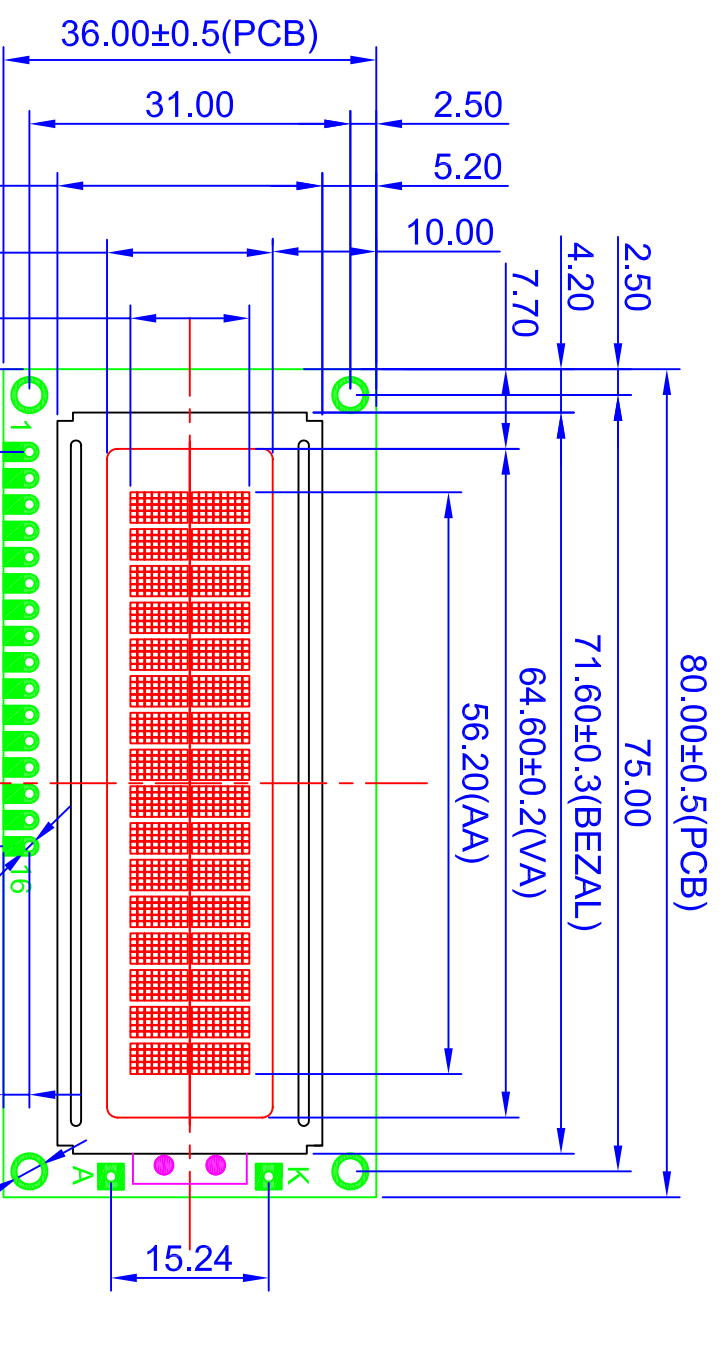

NO.	PIN NAME	DESCRIPTION
1	VSS	POWER GROUND
2	VDD	POWER SUPPLY FOR LOGIC
3	V0	POWER SUPPLY FOR LCD
4	RS	Register select. H:Data, L:Instruction
5	R/W	Read/Write Select. H:Read, L:Write
6	E	Read/write enable signal.
7-14	D0-D7	Data bus.
15	LED+	POWER SUPPLY FOR LED+ (+4.2V)
16	LED-	POWER SUPPLY FOR LED- (0V)

- NOTE:
- 1.DISPLAY TYPE : STN, GREY, POSITIVE
 - 2.VIEWING DIRECTION: 6:00
 - 3.POLARIZER MODE: TRANSPARENT
 - 4.LCD DRIVE METHOD: 1/16 DUTY, 1/5 BIAS, VOP=4.6V
 - 5.OPERATING TEMP:-20°C~+70°C
 - 6.STORAGE TEMP:-30°C~+80°C
 - 7.POWER SUPPLY FOR LOGIC:5.0V
 - 8.LCD CONTROLLER:S6A0069, Russian Font
 - 9.BACKLIGHT:Y/G, 4.2V, 130mA, 26 Dices

HTDISPLAY CO., LTD.

DRAWING No.: HC160214C-GF62L-VB
 DRAWING TITLE: LCM Drawing
 FILE NO.: 8

TOLERANCE
>0~6 ±0.10
>6~80 ±0.20
>80~240 ±0.30
>240~400 ±0.50
// L ⊙ ±0.10

DESIGN	JHG	20061113	STANDARD	REV. : B	SCALE : -
CHECKED			TECHNOLOGY	PROJECTION:	UNIT : mm
APPROVED			Q. A		SHEET : 1/3