
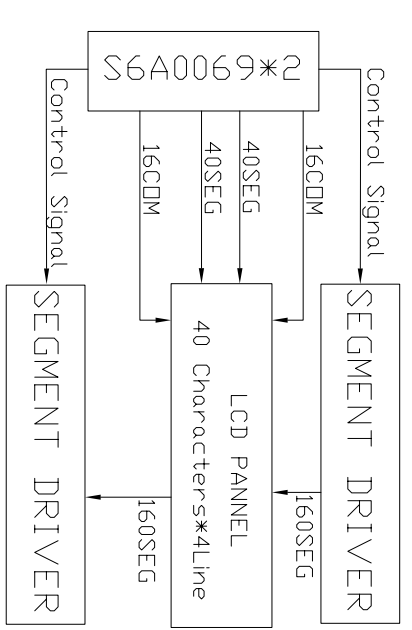



REV.	CHANGE CONTENT	BY	DATE

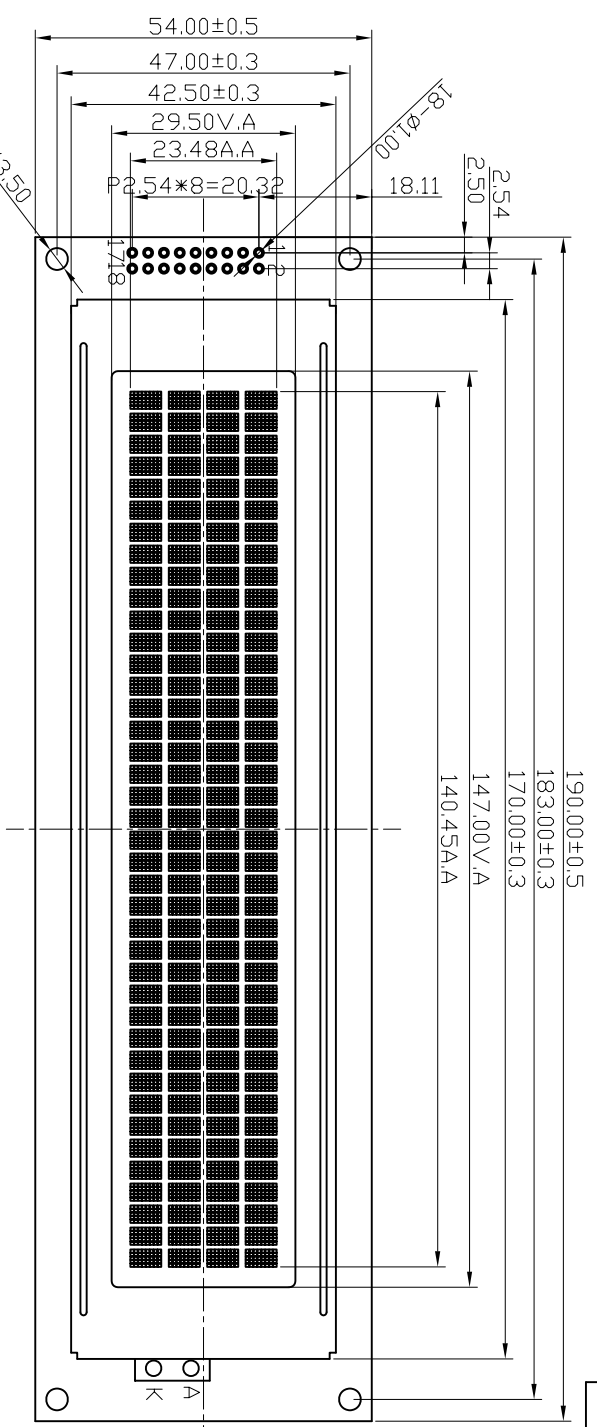

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
SYMBOL	D7	D6	D5	D4	D3	D2	D1	D0	E1	R/W	RS	VD	GND	VDD	E2	NC	A	K

- NOTE:
1. DISPLAY TYPE: STN-Y/G-POSITIVE
  2. DISPLAY MODE: TRANSFLECTIVE
  3. DRIVE METHOD: 1/16 DUTY, 1/5 BIAS, 4.6V Vop, 5V VDD
  4. VIEWING DIR.: 6:00
  5. OP. TEMP.: -20°C~70°C
  6. ST. TEMP.: -30°C~80°C
  7. BACKLIGHT: COLOR-Y/G, 4.15±0.2V, 500mA, MIN.80 CD/m<sup>2</sup>
  8. DRIVER IC:S6A0069\*2,S6A2067\*4

TOLERANCE	>0~6 ±0.10			HTDISPLAY CO., LTD.	DRAWING No. : HC400401C-YF62L-VA
	>6~80 ±0.20	DESIGN	ZOUYS	05.12.10	STANDARD
	>80~240 ±0.30	CHECKED			TECHNOLOGY
	>240~400 ±0.50	APPROVED			Q.A
	// 1.0 ±0.10				
		REV. : A	SCALE : -		
		PROJECTION:	UNIT : mm		
			SHEET : 1/1		