



REV.	CHANGE CONTENT	BY	DATE

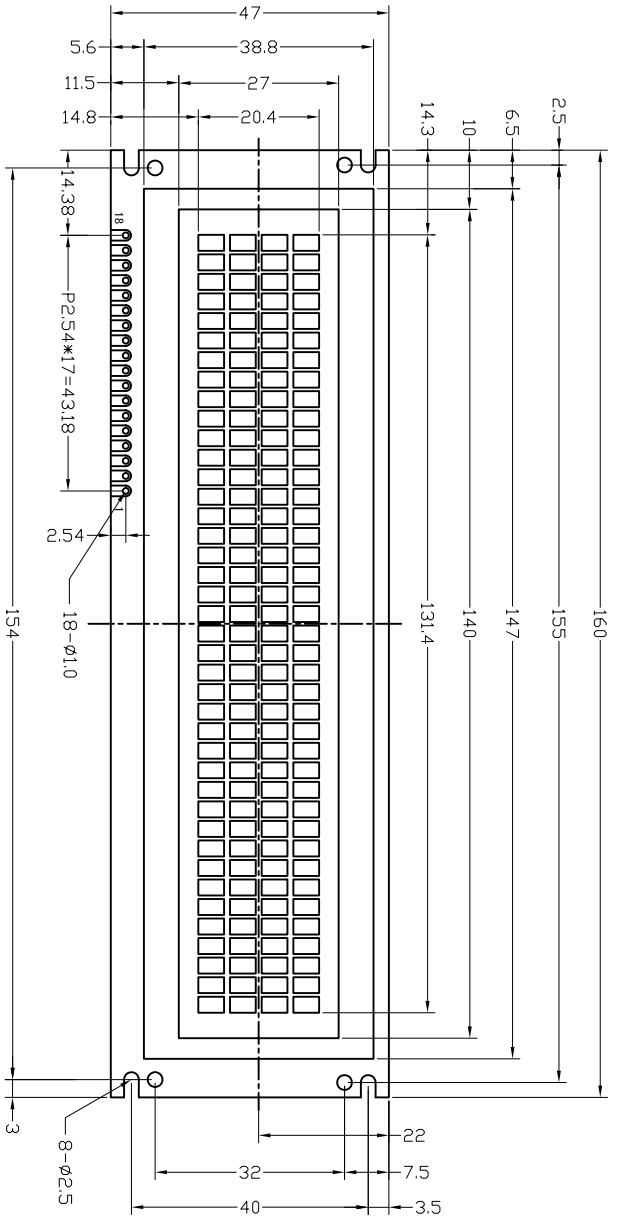

PIN	1	2	3	4	5	6	7	8	9
	VSS	VDD	V0	RS	R/W	E1	E2	DB0	DB1
PIN	10	11	12	13	14	15	16	17	18
	DB2	DB3	DB4	DB5	DB6	DB7	A	K	NC

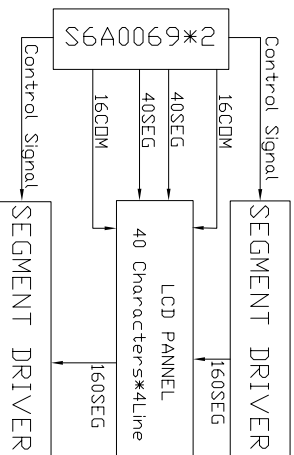

NOTE:

1. DISPLAY TYPE: STN-Y/G-POSITIVE
2. DISPLAY MODE: TRANSLLECTIVE
3. DRIVE METHOD: 1/16 DUTY, 1/5 BIAS, 4.6V Vop, 5V VDD
4. VIEWING DIR.: 6:00
5. OP. TEMP.: -20°C~70°C
6. ST. TEMP.: -30°C~80°C
7. BACKLIGHT: COLOR-Y/G, 4.2±0.2V, 500mA, MIN. 80 CD/m²
8. DRIVER IC: S6A0069*2, S6A2067*4

TOLERANCE	
>0~6	±0.10
>6~80	±0.20
>80~240	±0.30
>240~400	±0.50
// 1.0 @ ±0.10	



HTDISPLAY CO., LTD.

DRAWING No. : HC400402C-YF62L-VA	REV. : A	SCALE : -
DRAWING TITLE: LCM DRAWING	PROJECTION:	UNIT : mm
		SHEET : 1/1