


1. Package Dimension

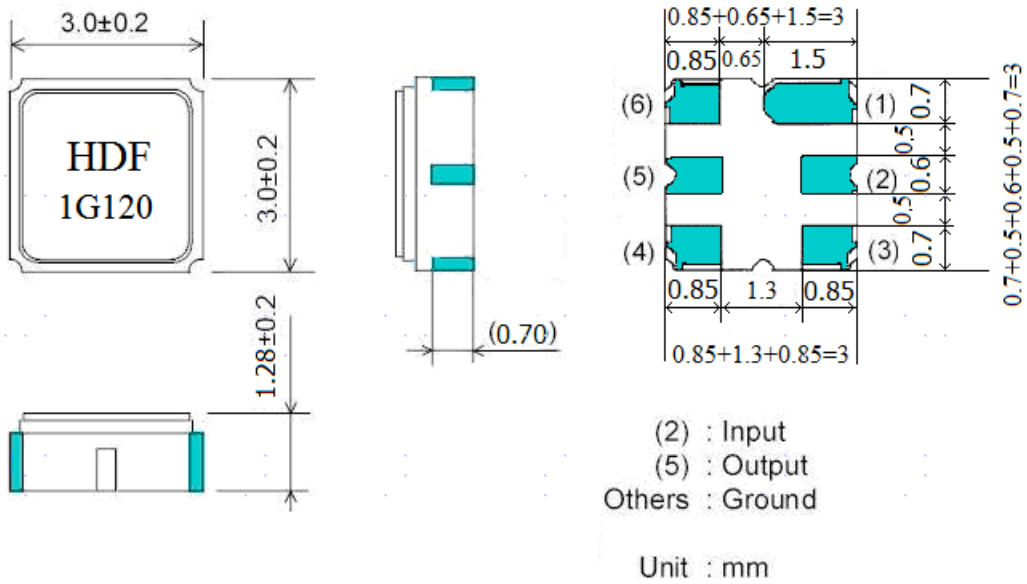

2. Performance


2.1 Maximum Rating

Items	Rating	unit
DC Voltage, maximum	10	V _{dc}
Input Power, maximum	15	dBm
Storage Temperature Range	-40~+85	°C
Operating Temperature Range	-40~+85	°C


2.2 Electronic Characteristics

Temperature range for specification: T = 25 °C

	Unit	Min.	Typ.	Max.
Center Frequency Fc	MHz	-	1232	-
Insertion Loss (1164~1300MHz)	dB	-	1.2	2.0
Amplitude Ripple (1164~1300MHz)	dB	-	0.8	1.5
VSWR (1164~1300MHz)		-	1.5	2.0
GDV (1164~1300MHz)	ns		10	20
Attenuation				
DC~880MHz	dB	30	35	-
880~1080 MHz		35	40	
1380~1650 MHz		37	42	
1650~2450 MHz		30	35	
2450~3000 MHz		25	28	
Input/output Impedance	Ohms		50	

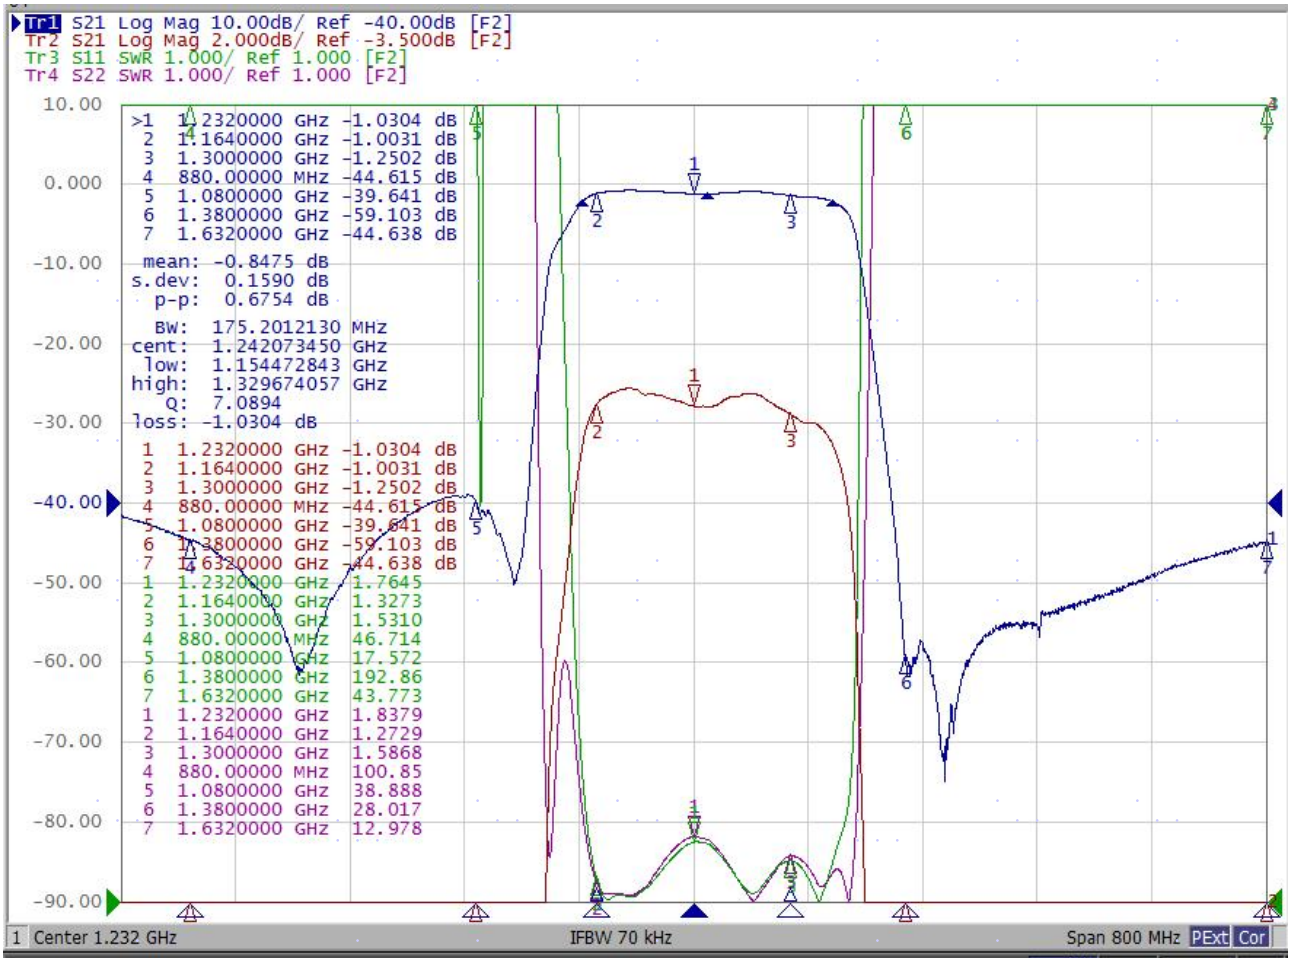

3. Test Circuit

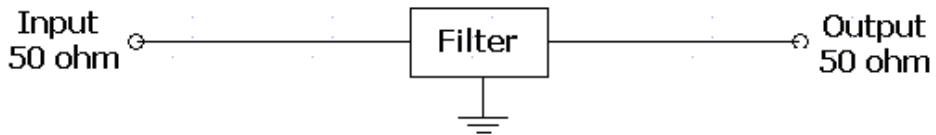

4. Packing

