


HDG12864L-6

Dimensional Drawing

液晶之友 电话: 020-33819057
[Http://www.lcdfriends.com](http://www.lcdfriends.com)

128 X 64 Dots Graphic, LED Backlight

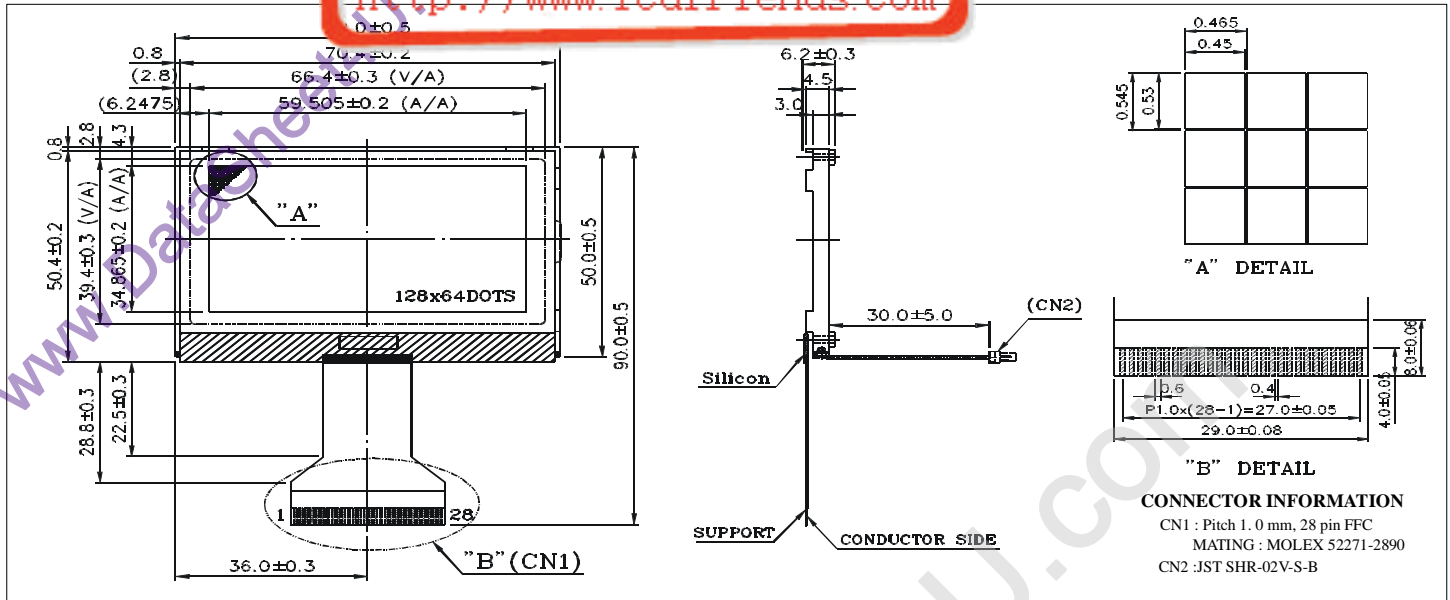


Features

- Back lightBlue LED
- ConnectionFlat Flex Cable
- Options.....STN/FSTN, Transflective Polarizer
- Built-in Controller.....Epson SED1565D0B or Compatible

Physical Data

- Module Size.....72.0W x 50.4H x 6.2T mm
- Viewing Area Size.....67.0W x 40.0H mm
- Dot Pitch.....0.465W x 0.545H mm
- Dot Size.....0.45W x 0.53H mm
- Weight.....25.7g

Power Supply

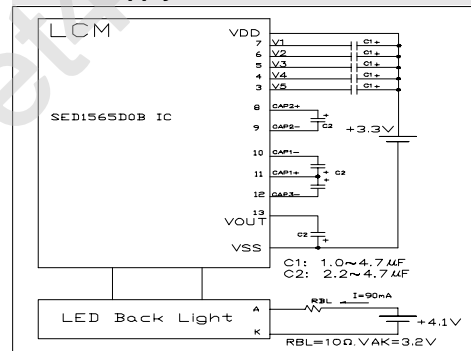

Absolute Maximum Ratings

PARAMETER	SYMBOL	MIN	MAX	UNIT
SUPPLY VOLTAGE	V _{DD} -V _{SS}	-0.3	5.5	V
INPUT VOLTAGE	V _{IN}	-0.3	V _{DD}	V
OPERATING TEMPERATURE	T _{OP}	-20	70	°C
STORAGE TEMPERATURE	T _{STG}	-30	80	°C

Pin Connections

PIN NO.	SYMBOL	FUNCTION
1	P/S	Select Paralle/ Serial mode
2	C86	'H': 6800 Series MPU, 'L': 8080 MPU
3 - 7	V5-V1	This is a multi-level power supply for LCD drive
8	CAP2+	DC/DC Voltage ConInverter capacitors
9	CAP2-	
10	CAP1-	
11	CAP1+	
12	CAP3-	
13	VOUT #	
14	V _{SS}	Ground
15	V _{DD}	Power supply for Logic
16	D7 (SI)	Data Bus 7 or Serial Data Input
17	D6 (SCL1)	Data Bus 6 or Serial Clock Input
18 - 23	D5-D0	Data Bus
24	\overline{RD} (E)	Enable Clock Input
25	\overline{WR} (R/W)	Signal to select Read or Write
26	A0	Control/Data Select Signal
27	\overline{RES}	Reset Signal
28	CS1	Chip Select Signal

#Has built-in inverter for negative power supply

Electrical Characteristics (V_{DD}=3.3±0.33V 25°C)

PARAMETER	SYM	CONDITION	MIN	TYP	MAX	UNIT
INPUT HIGH VOLTAGE	V _{IH}	-	0.8V _{DD}	-	V _{DD}	V
INPUT LOW VOLTAGE	V _{IL}	-	0	-	0.2V _{DD}	V
LCD DRIVING VOLTAGE	V _{DD} -V _L	TA=25°C	8.3	8.6	8.9	V
LCD POWER CURRENT	I _{DD}	V _{DD} =3.3V	-	0.4	0.6	mA
LED FORWARD VOLTAGE	V _F	I _F = 90 mA	-	3.2	3.5	V
LED FORWARD CURRENT	I _F	V _F = 3.2 V	-	90	120	mA
BRIGHTNESS	L	All Dots ON	-	0.59	-	cd/m ²
		All Dots OFF	-	1.26	-	
DRIVE METHOD		1/64 Duty				