


HANTRONIX

PRODUCT SPECIFICATION

HDM3224-2

320 x 240 GRAPHICS
LCD DISPLAY MODULE

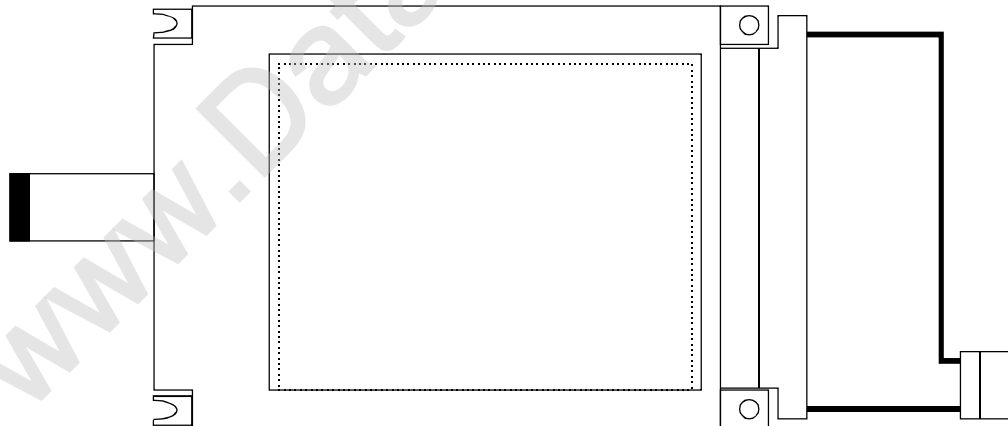

HANTRONIX, INC. 10080 BUBB RD. CUPERTINO, CA 95014	Q.A.: JK	REV.: 1.1	HDM3224-2	SHEET 1 OF 18
				DATE: 2/11/02

1.MECHANICAL DATA

(1) Product No.	HDM3224-2
(2) Module Size	168 (W)mm x 111.0 (H)mm x 7.4 (D)mm (CCFT B.L.)
(3) Dot Size	0.33 (W)mm x 0.33 (H)mm
(4) Dot Pitch	0.36 (W)mm x 0.36 (H)mm
(5) Number of Dots	320 (W) x 240 (H)Dots
(6) Duty	1/240
(7) LCD Display Mode	FSTN: Black and White(Normally Black/Negative Image) Rear Polarizer: Transmission
(8) Viewing Direction	6 O'clock
(9) Backlight	CCFT
(10) Controller	Excluded
(11) DC/DC Converter	Excluded
(12) Weight	180 g(APPROX)

HANTRONIX, INC. 10080 BUBB RD. CUPERTINO, CA 95014	Q.A.: JK	REV.: 1.1	HDM3224-2	SHEET 2 OF 18
				DATE: 2/11/02

2.ABSOLUTE MAXIMUM RATINGS

(1) ELECTRICAL ABSOLUTE RATINGS

VSS=0V STANDARD

ITEM	SYMBOL	MIN	MAX	UNIT	COMMENT
Power Supply for Logic	VDD-VSS	-0.3	7.0	V	
Power Supply for LCM	VEE-VSS	0	30.0	V	
Input Voltage	VI	-0.3	VDD	V	
Static Electricity	-	-	-	-	Note 1

(2) ENVIRONMENTAL ABSOLUTE MAXIMUM RATINGS

ITEM	NORMAL TEMP.			
	OPERATING		STORAGE	
	MIN.	MAX.	MIN.	MAX.
Ambient Temperature	-20	70	-30	80
Humidity (Without Condensation)	Note 2,3,5		Note 2,4	

Note 1 LCM should be grounded during handling LCM.

Note 2 Background color changes slightly depending on ambient temperature.
This phenomenon is reversible.

Note 3 $T_a \leq 70^{\circ}\text{C}$: 75%RH max
 $T_a > 70^{\circ}\text{C}$: Absolute humidity must be lower
than the humidity of 75%RH at 70°C

Note 4 T_a at -30°C will be < 48hrs, at 80°C will be < 120hrs

Note 5 Operation temp not include CCFL Lamp

HANTRONIX, INC. 10080 BUBB RD. CUPERTINO, CA 95014	Q.A.: JK	REV.: 1.1	HDM3224-2	SHEET 3 OF 18
				DATE: 2/11/02

3. ELECTRICAL CHARACTERISTICS

3-1. ELECTRICAL CHARACTERISTICS OF LCM

(VDD = 5V±5%)

ITEM			SYMBOL	CONDITION		MIN.	TYP.	MAX.	UNIT
Power Supply for Logic			VDD-VSS	—		4.75	5.0	5.25	V
Recommended LC Driving Voltage (Wide Temp. LCM)			VLCD-VSS	Duty=1/240 Bias=1/13	-20°C	24.6	25.0	25.4	V
					0°C	23.6	24.0	24.4	
					25°C	22.8	23.2	23.6	
					50°C	21.7	22.1	22.5	
					70°C	20.8	21.2	21.6	
Input Voltage			VIH	H level		0.7VDD	—	VDD	V
			VIL	L level		0	—	0.3VDD	
Power Supply Current			IDD	FLM = 70 Hz VSS = 0 V VLCD = 23.2 V VLCD-VSS= 23.2 V		—	0.5	—	mA
			ILCD	PATTERN : □ ■ □ ■ □ ■ ■ □ ■ □ ■ □		—	6.0	—	
LCM	Surface Luminance	CCFL	T203G1K	VSS=0V VLCD-VSS =23.2V	PATTERN: (Dots All Off)	—	12	—	cd/m ²
			T203G1K		PATTERN: (Dots All ON)	—	170	—	

3-2.ELECTRICAL CHARACTERISTICS OF BACKLIGHT

Used CCFL Rating

Temp.=25°C

ITEM	SYMBOL	MIN.	TYP.	MAX.	UNIT	REMARK
Lamp voltage	V _L	—	260	—	Vrms	—
Lamp current	I _L	2	5	6	mA _{rms}	—
Lamp power consumption	P _L	—	2.53	—	W	(*1)
Lamp frequency	F _L	20	35	50	KHz	—
Lamp life time	L _L	—	20000	—	hrs	IL = 5 mA _{rms} (*2)

(*1) Power consumption excluded inverter loss .

(*2) Lamp life time is defined as follows : The final brightness is at 50% of original brightness

HANTRONIX, INC.
10080 BUBB RD.
CUPERTINO, CA 95014

Q.A.:

JK

REV.:

1.1

HDM3224-2

SHEET 5 OF 18

DATE:

2/11/02

4.OPTICAL CHARACTERISTICS

(For Wide Temperature Mode LCM)

AT Vop

ITEM MODE		Cr(Contrast Ratio)										θ (Viewing Angle)		ϕ (Viewing Angle)	
		-20℃		0℃		25℃		50℃		70℃		50℃		50℃	
		MIN.	TYP.	MIN.	TYP.	MIN.	TYP.	MIN.	TYP.	MIN.	TYP.	MIN.	TYP.	MIN.	TYP.
T	G	10.0	10.5	20.0	20.5	22.5	23.0	8.0	8.5	3.5	4.0	—	F: 55 R: 55	—	R: 50 L: 40
NOTE		NOTE 6										NOTE 5			

NOTE :

T : TRANSMISSIVE

G : NORMALLY BLACK

AT $\phi=0^\circ$ $\theta=0^\circ$

ITEM	SYMBOL	CONDITION	MIN.	TYP.	MAX.	UNIT	NOTE
Response Time (rise)	Tr	-20℃	—	2000	3300	ms	NOTE 2
		0℃	—	350	450		
		25℃	—	140	190		
		50℃	—	70	90		
		70℃	—	60	75		
Response Time (fall)	Tf	-20℃	—	3400	4400	ms	NOTE 2
		0℃	—	680	880		
		25℃	—	230	280		
		50℃	—	110	130		
		70℃	—	70	85		

HANTRONIX, INC.
10080 BUBB RD.
CUPERTINO, CA 95014

Q.A.:

JK

REV.:

1.1

HDM3224-2


SHEET 6 OF 18

DATE:


2/11/02

(NOTE 1)

Definition of Operation Voltage(Vop)

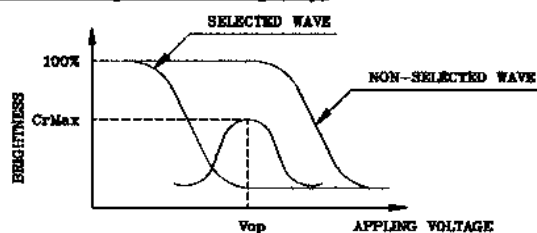

(positive type)

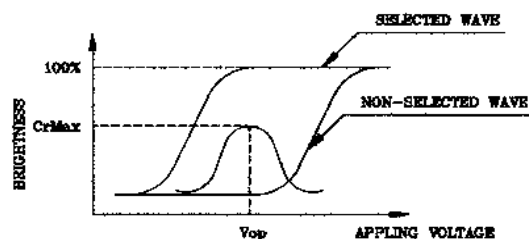

(negative type)

*Conditions


Viewing Angle : 0

Frame Frequency : 70Hz


Applying Waveform : 1/N duty 1/a bias

(NOTE 2)

Definition of Response Time(Tr,Tf)

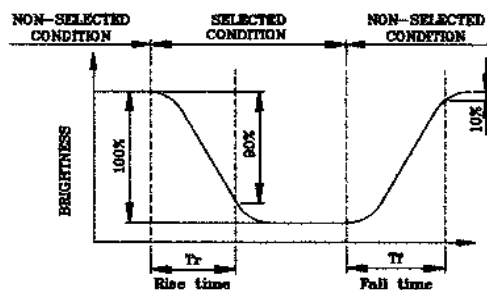

(positive type)

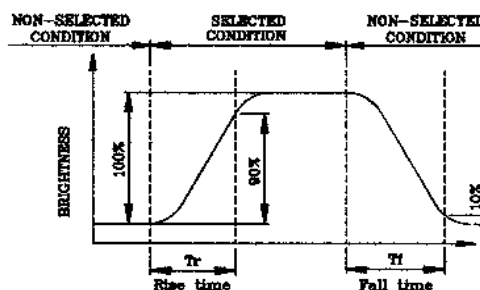

(negative type)

*Conditions

Operating Voltage : Vop



Viewing Angle (θ,θ) : (0,0)

Frame Frequency : 70Hz

Applying Waveform : 1/N duty 1/a bias

(NOTE 3)

Description of Measuring Equipment and Driving Waveforms

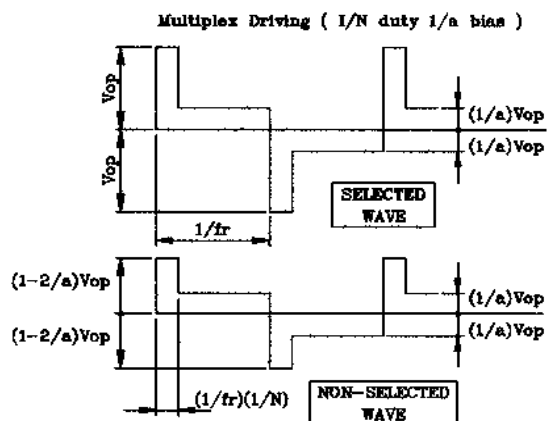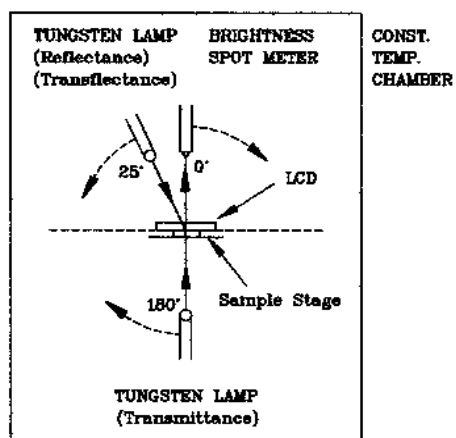

HANTRONIX, INC.
10080 BUBB RD.
CUPERTINO, CA 95014

Q.A.:
JK

REV.:
1.1


HDM3224-2

SHEET 7 OF 18

DATE:
2/11/02



(NOTE 4)

Definition of Viewing Direction

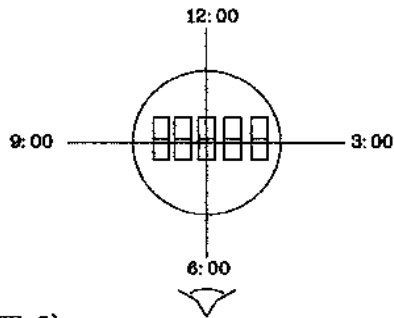

(NOTE 5)

Definition of Viewing Angle

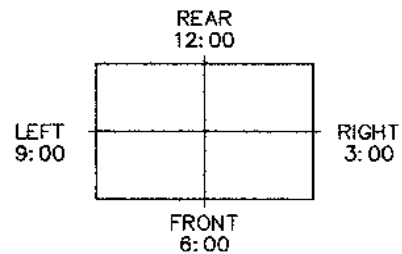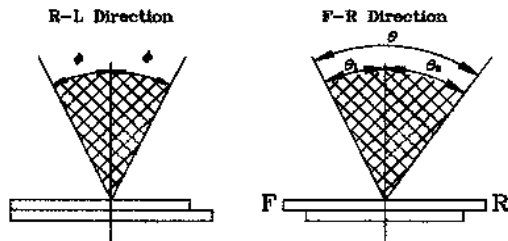

*For This Product

The Viewing Direction Is 6 O'clock
So $\theta_1 > \theta_2$


$$\theta = \theta_1 + \theta_2$$

*Conditions


Operating Voltage : V_{op}
Frame Frequency : 70Hz
Applying Waveform : 1/N duty 1/a bias
Contrast Ratio : larger than 2

(NOTE 6)

Definition of Contrast Ratio (Cr)

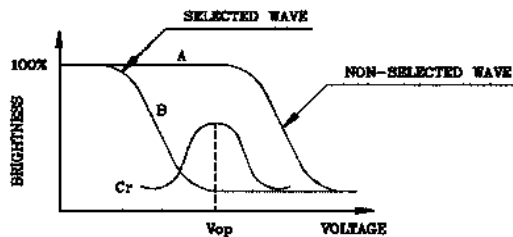

(positive type)

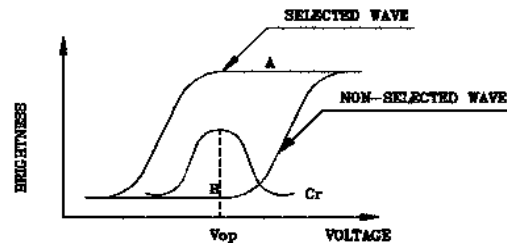

(negative type)

$$\text{Contrast Ratio : } Cr = A/B$$

*Conditions

Viewing Angle : 0
Frame Frequency : 70Hz
Applying Waveform : 1/N duty 1/a bias

HANTRONIX, INC.
10080 BUBB RD.
CUPERTINO, CA 95014

Q.A.:
JK


REV.:
1.1

HDM3224-2

SHEET 8 OF 18

DATE:
2/11/02

5. BLOCK DIAGRAM

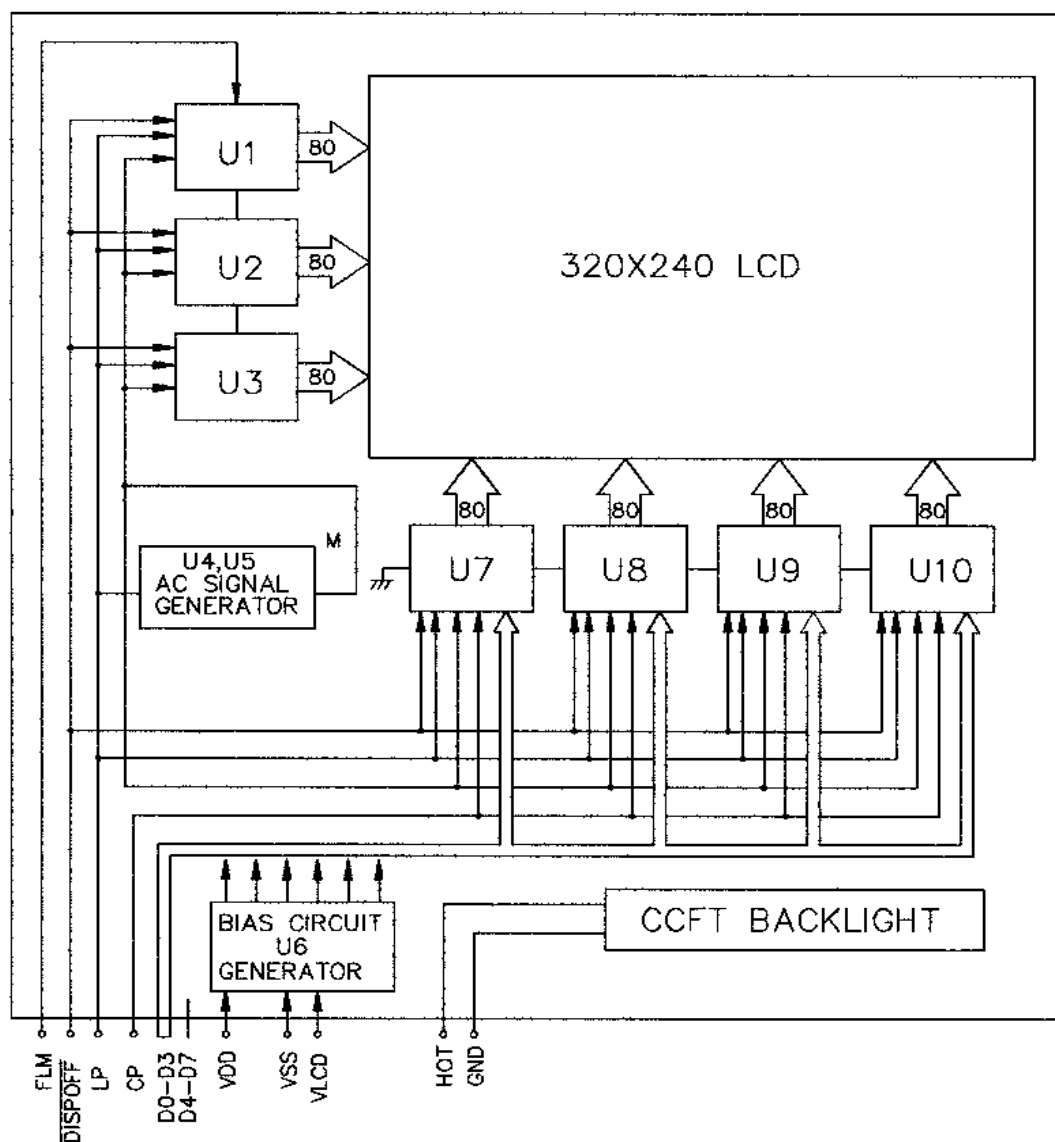

* AC SIGNAL SETTING

J1	J2	J3	J4	J5	J6	J7	J8
L	H	L	L	H	L	L	L

6.INTERNAL PIN CONNECTION

LCD :

PIN NO.	SYMBOL	LEVEL	FUNCTION
1	FLM	H	SCAN START-UP SIGNAL
2	LP	H→L	INPUT DATA LATCH SIGNAL
3	CP	H→L	DATA INPUT CLOCK SIGNAL
4	DISPOFF	H/L	H: ON/L: OFF
5	VDD	—	POWER SUPPLY FOR LOGIC(+5V)
6	VSS	—	SIGNAL GROUND(0V)
7	VLCD	—	POWER SUPPLY FOR LCD
8	D0	H/L	DISPLAY DATA SIGNAL
9	D1	H/L	
10	D2	H/L	
11	D3	H/L	
12	D4	—	NO CONNECTION
13	D5	—	
14	D6	—	
15	D7	—	
16	VSS	—	SIGNAL GROUND(0V)

CCFL CONNECTOR : M63M83-04(MITSUMI)

PIN NO.	SYMBOL	LEVEL	FUNCTION
1	HOT	—	POWER SUPPLY FOR CCFT (HOT)
2	NC	—	NO CONNECTION
3	NC	—	NO CONNECTION
4	GND	—	POWER SUPPLY FOR CCFT (GND)

LCD INTERFACE CABLE :

FFC,N16,Pitch 1.0 mm (Thickness = 0.3 mm)

CORRESPONDABLE LCD CONNECTOR :

MOLEX 52207-1690 or COMPATIBLE

CCFL CONNECTOR :


M63M83-04 (MITSUMI)

CORRESPONDABLE CCFL CONNECTOR :

M60-04-30-134P or M60-04-30-114P or M61M73-04 (MITSUMI)

HANTRONIX, INC. 10080 BUBB RD. CUPERTINO, CA 95014	Q.A.: JK	REV.: 1.1	HDM3224-2	SHEET 10 OF 18
				DATE: 2/11/02

7. POWER SUPPLY

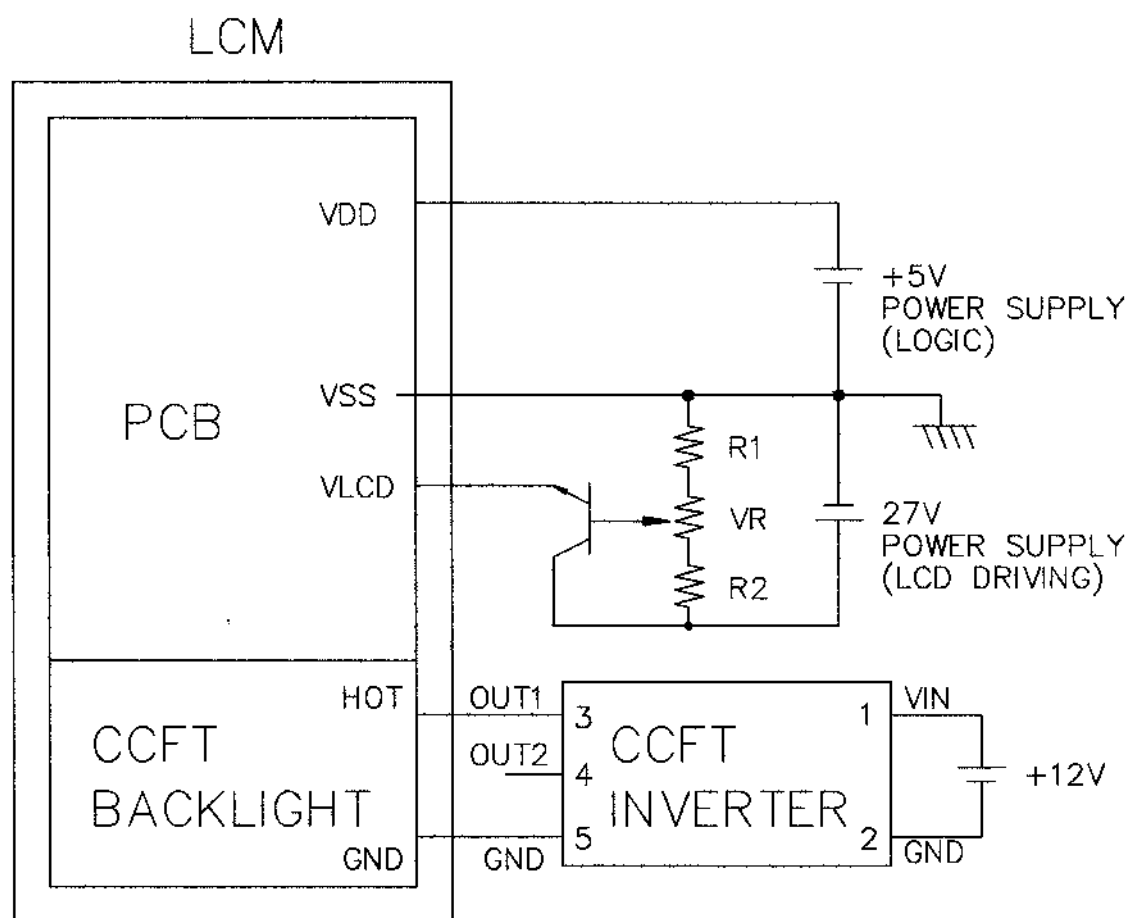


1. $R1 + VR + R2 = 10K \sim 20K \Omega$


2. RECOMMENDED CCFT INVERTER : CXA-M10L-L(TDK)
CXA-L10L(TDK)

8-1. TIMING CHARACTERISTICS


ITEM	SYMBOL	MIN.	TYP.	MAX.	UNIT
CLOCK CYCLE TIME	t_{cyc}	152	—	—	ns
CLOCK HIGH LEVEL WIDTH	t_{cwh}	65	—	—	ns
CLOCK LOW LEVEL WIDTH	t_{cwl}	65	—	—	ns
CLOCK RISE TIME	t_r	—	—	50	ns
CLOCK FALL TIME	t_f	—	—	50	ns
DATA SETUP TIME	t_{ds}	50	—	—	ns
DATA HOLD TIME	t_{dh}	40	—	—	ns
CLOCK SETUP TIME	t_{scl}	65	—	—	ns
CLOCK HOLD TIME	t_{hcl}	65	—	—	ns
FRAME SETUP TIME	t_{setup}	100	—	—	ns
FRAME HOLD TIME	t_{hold}	100	—	—	ns

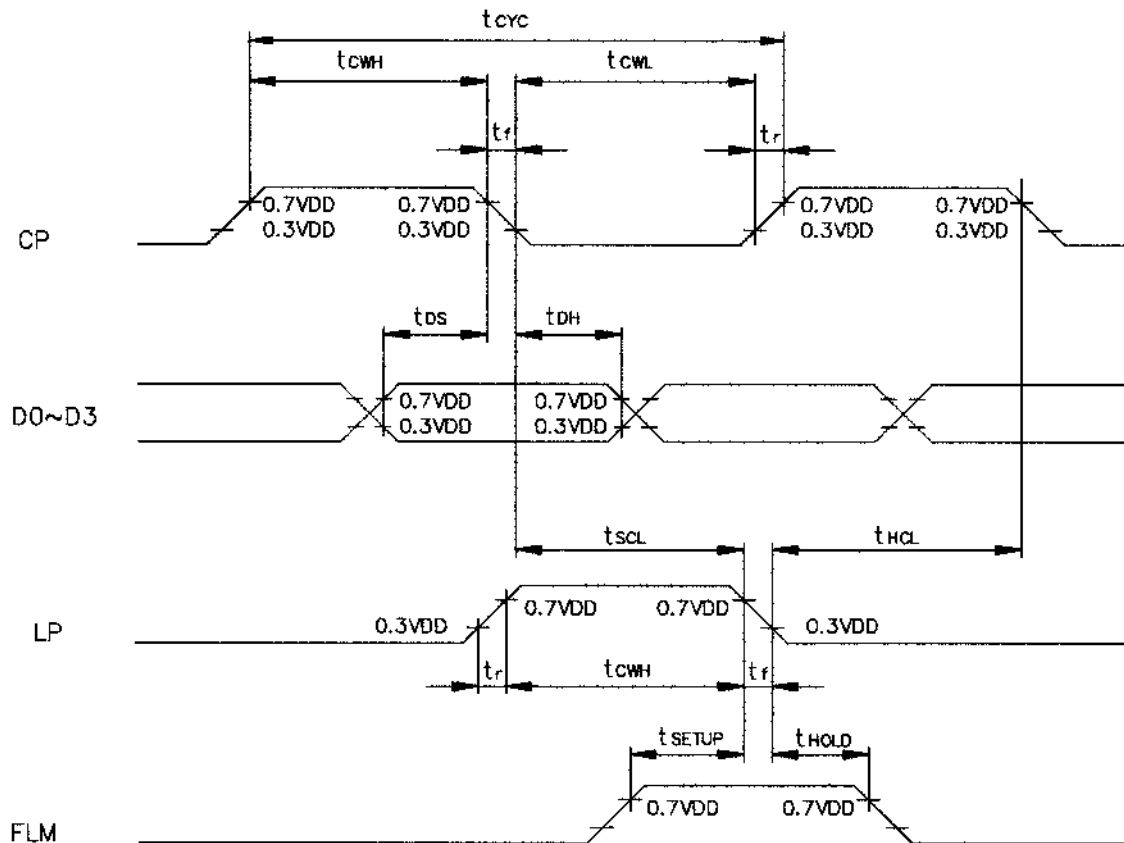


8-2. TIMING CHART OF INPUT SIGNALS

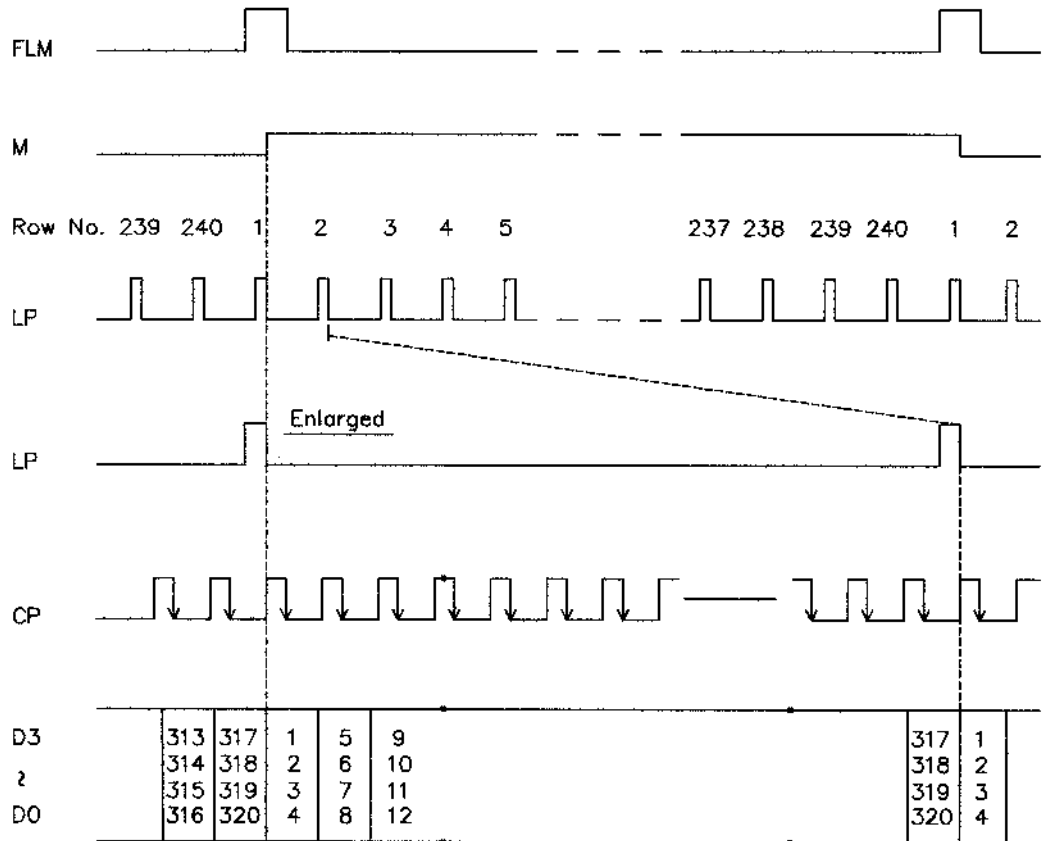

8-3.DISPLAY PATTERN

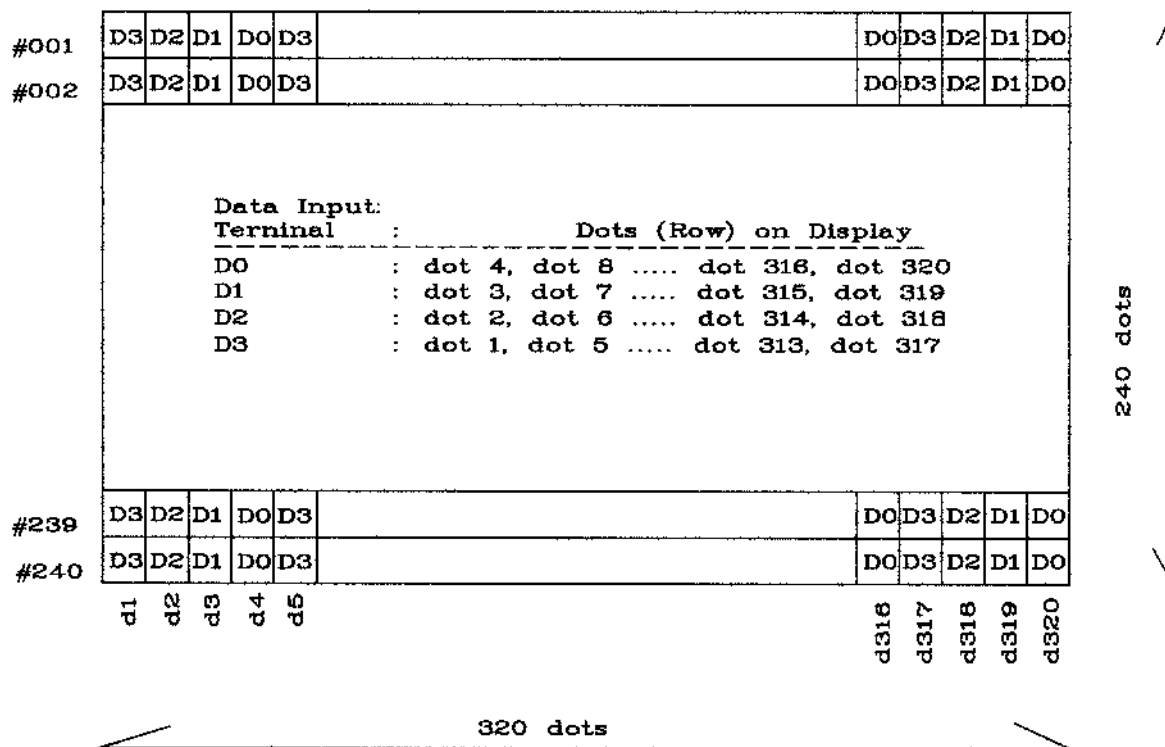

8-4. POWER ON/OFF TIMING

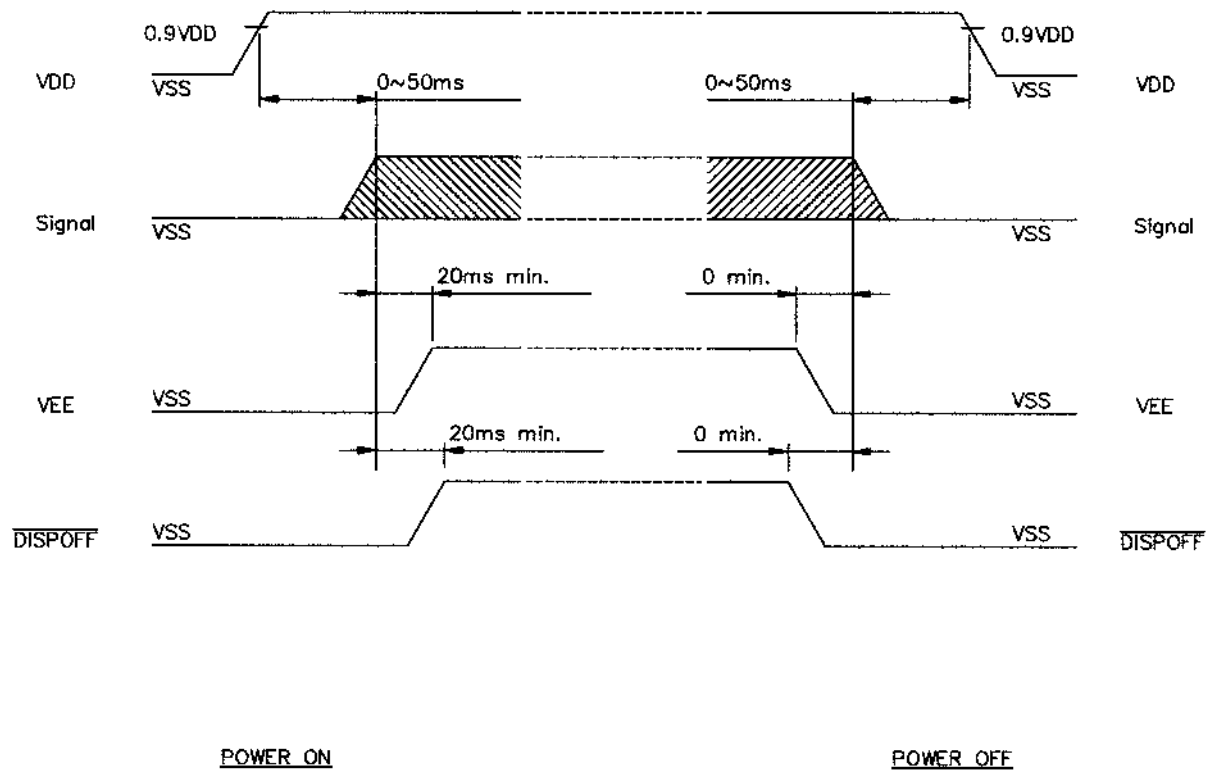

The missing pixels may occur when the LCM is driven beyond above power interface timing sequence.

HANTRONIX, INC. 10080 BUBB RD. CUPERTINO, CA 95014	Q.A.: JK	REV.: 1.1	HDM3224-2	SHEET 15 OF 18
				DATE: 2/11/02

9. RELIABILITY TEST

NO	ITEM	CONDITION			STANDARD	NOTE
1	High Temp. Storage	70°C	120HR		Appearance without defect	
2	Low Temp. Storage	-20°C	120HR		Appearance without defect	
3	High Temp. & High Humi. Storage	40°C 90%RH	120HR		Appearance without defect	
4	Thermal Shock	-20°C, 30min → 25°C, 5min → 70°C, 30min → 25°C, 5min (1cycle)			Appearance without defect	5 cycles

HANTRONIX, INC.
10080 BUBB RD.
CUPERTINO, CA 95014

Q.A.:
JK

REV.:
1.1

HDM3224-2

SHEET 16 OF 18

DATE: 2/11/02

NOTICE:

- SAFETY

- 1.If the LCD panel breaks, be careful not to get the liquid crystal to touch your skin.
- 2.If the liquid crystal touches your skin or clothes, please wash it off immediately by using soap and water.

- HANDLING

- 1.Avoid static electricity which can damage the CMOS LSI.
- 2.Do not remove the panel or frame from the module.
- 3.The polarizing plate of the display is very fragile. So, please handle it very carefully.
- 4.Do not wipe the polarizing plate with a dry cloth, as it may easily scratch the surface of plate.
- 5.Do not use ketonics solvent & Aromatic solvent, use with a soft cloth soaked with a cleaning naphtha solvent.

- STORAGE

- 1.Store the panel or module in a dark place where the temperature is $25^{\circ}\text{C}\pm 5^{\circ}\text{C}$ and the humidity is below 65% RH.
- 2.Do not place the module near organics solvents or corrosive gases.
- 3.Do not crush, shake, or jolt the module.

- TERMS OF WARRANT

- 1.Acceptance inspection period
The period is within one month after the arrival of contracted commodity at the buyer's factory site.
- 2.Applicable warrant period
The period is within twelve months since the date of shipping out under normal using and storage conditions.

HANTRONIX, INC. 10080 BUBB RD. CUPERTINO, CA 95014	Q.A.: JK	REV.: 1.1	HDM3224-2	SHEET 17 OF 18
				DATE: 2/11/02

PIN ASSIGNMENT OF COFL CONNECTION


PIN No.	SYMBOL	LEVEL	FUNCTION
1	HOT	-	Power Supply for COFL(HOT)
2	NC	-	No Connection
3	NC	-	No Connection
4	GND	-	Power Supply for COFL(GND)

PIN ASSIGNMENT OF I/O CONNECTION

PIN No.	SYMBOL	LEVEL	FUNCTION
1	FLM	H/L	FIRST LINE MARKER
2	LP	H/L	DATA LATCH SIGNAL
3	CP	H/L	DATA SHIFT CLOCK SIGNAL
4	DISPCT	H/L	H-ON/L-OFF
5	VDD	-	POWER SUPPLY FOR LOGIC
6	VSS	-	GND
7	VLCD	-	POWER SUPPLY FOR LCD DRIVER (+)
8	DO	H/L	Display Data
9	D1	H/L	Display Data
10	D2	H/L	Display Data
11	D3	H/L	Display Data
12	D4	-	No Connection
13	D5	-	No Connection
14	D6	-	No Connection
15	D7	-	No Connection
16	VSS	-	GND

NOTE :

1. RESOLUTION : 320 X 240 DOTS
2. CONTROLLER : EXCLUDED
3. DC/DC CONVERTER : EXCLUDED
4. $\varnothing$ INTERFACE CONNECTOR
FFC, M16 P1.0mm
 $\varnothing$ COFL CONNECTOR
MS3463-04(M15UM)
5. TOLERANCE NO SPECIFIED : $\pm 0.5\text{mm}$

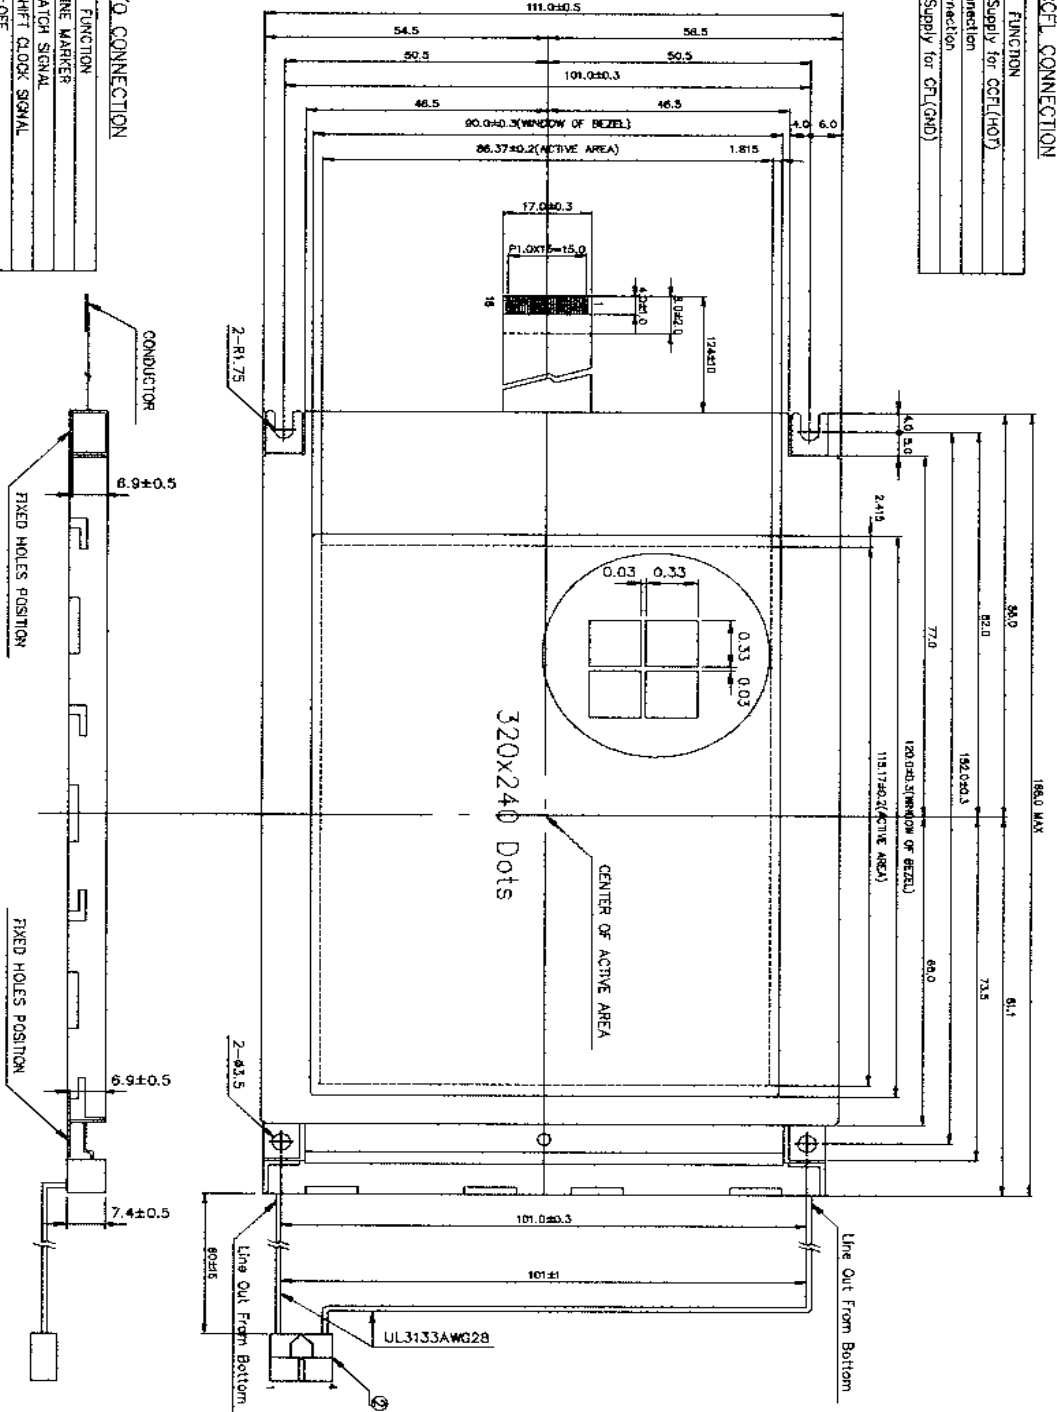

HANTRONIX, INC.
10080 BUBB RD.
CUPERTINO, CA 95014

Q.A.:

JK

REV.:

1.1

HDM3224-2

SHEET 18 OF 18

DATE:

2/11/02