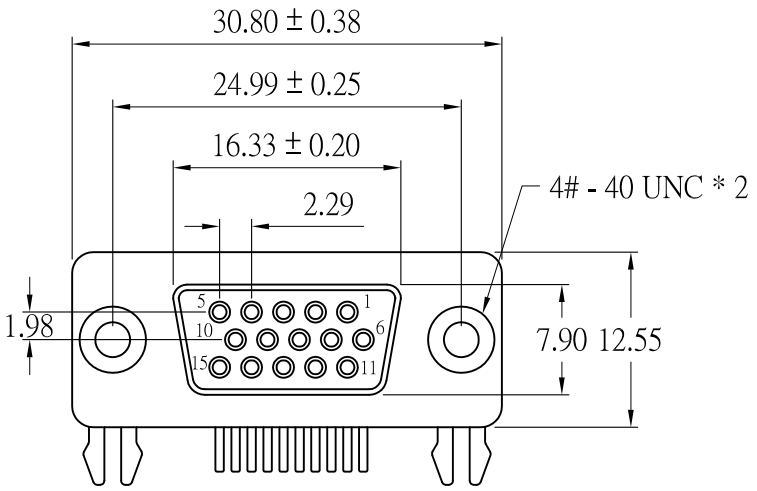

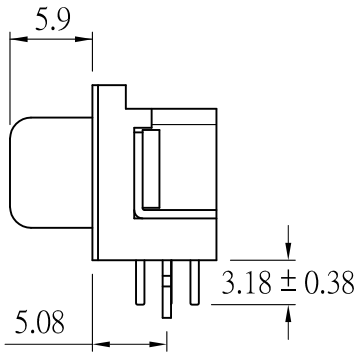

MATERIAL:

INSULATOR : PBT+30% GLASS FIBER (UL 94V-0) .
CONTACT MATERIAL : BRASS.
CONTACT FINISH : GOLD FLASH ON MATING END, TIN-LEAD ON TERMINATION END, WITH ENTIRE CONTACT NICKEL UNDERPLATED.
SHELL FINISH : STEEL NICKEL OR TIN PLATED.

SPECIFICATION:

CURRENT RATING : 5AMP
DIELECTRIC WITHSTANDING VOLTAGE : 1000V PER MINUTE.
INSULATION RESISTANCE : 1000MΩ MIN. AT 500V DC.
CONTACT RESISTANCE : 15mΩ MAX. 10 SES.
OPERATING TEMPERATURE : -55˚C ~ +105˚C.

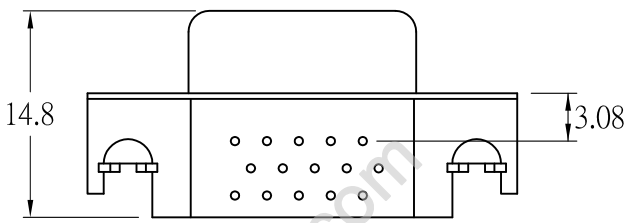

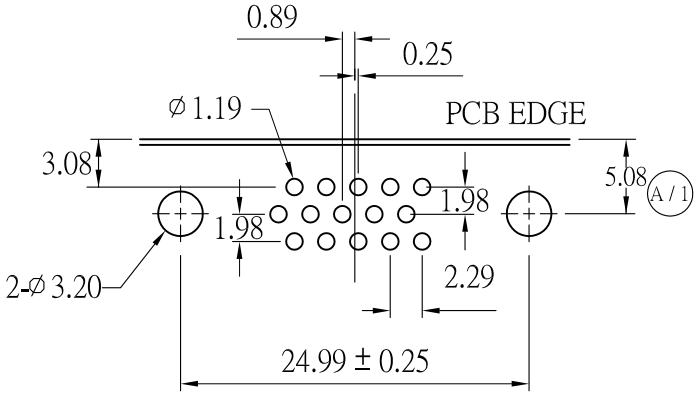

MORETHANALL CONNECTORS ASSEMBLIES 煜倫有限公司	PART NO. HDR30-SN-15		TOLERANCES ARE X.X ±0.25 X.XX ±0.15 X.XXX ±0.05	DESCRIP TION:	H-D D-SUB CONNECTORS RIGHT ANGLE , 15 FEMALE FOOTPRINT : 3.08mm	
	DWG NO. HDR30-SN-15	APPROVED BY CY				
	FILE NO.	DRAWING BY		AREA	REVISIONS / HK / DATE	
	UNIT / mm / SCALE 1 : 1	PROJECTION				

www.datasheet4u.com
www.DataSheet4U.com