

Kingtronics®**HER101 THRU
HER108****HIGH EFFICIENCY RECOVERY RECTIFIERS****REVERSE VOLTAGE 50 to 1000 Volts FORWARD CURRENT 1.0 Ampere****FEATURES**

- Low forward voltage drop
- Low leakage current
- High forward surge capability
- High temperature soldering guaranteed
- 260°C/10 seconds, 0.375" (9.5mm) lead length at 5 lbs(2.3kg) tension


MECHANICAL DATA

- Case: Transfer molded plastic
- Epoxy: UL94V-0 rate flame retardant
- Polarity: Color band denotes cathode end
- Lead: Plated axial lead, solderable per MIL-STD-202E method 208C
- Mounting position: Any

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

**Ratings at 25°C ambient temperature unless otherwise specified ,
Single phase, half wave, 60Hz, resistive or inductive load.**

For capacitive load derate current by 20%

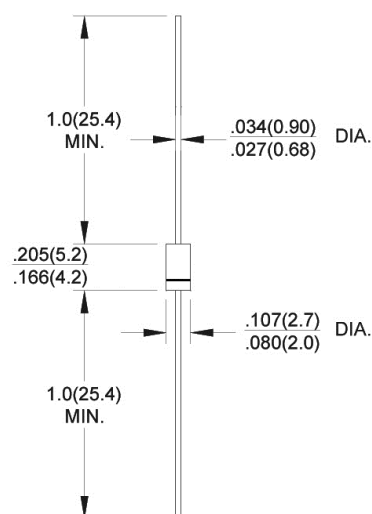DO-41**Dimensions in inches and (millimeters)**

PARAMETER	SYMBOL	HER 101	HER 102	HER 103	HER 104	HER 105	HER 106	HER 107	HER 108	UNIT
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	50	100	200	300	400	600	800	1000	VOLTS
Maximum RMS Voltage	V_{RMS}	35	70	140	210	280	420	560	700	VOLTS
Maximum DC Blocking Voltage	V_{DC}	50	100	200	300	400	600	800	1000	VOLTS
Maximum average forward rectified current at $T_A=55^\circ\text{C}$	$I_{(AV)}$	1.0								Amps
Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	30								Amps
Maximum instantaneous forward voltage at 1.0A	V_F	1.0		1.3		1.7			VOLTS	
Maximum DC Reverse Current at Rated DC Blocking Voltage	I_R	$T_A=25^\circ\text{C}$								uA
		$T_A=100^\circ\text{C}$								
Maximum reverse recovery time (NOTE 1)	T_{RR}	50				75			ns	
Typical Junction Capacitance (Note 2)	C_J	15				12			pF	
Typical Thermal Resistance (Note 3)	$R_{\theta JA}$	50								$^\circ\text{C/W}$
Operating and storage temperature range	T_J, T_{STG}	-55 to +150								$^\circ\text{C}$

1- Reverse recovery condition $I_f=0.5\text{A}, I_r=1.0\text{A}, I_{rr}=0.25\text{A}$.

2- Measured at 1 MHz and applied reverse voltage of 4.0 Volts.

3- Thermal Resistance thermal Junction to Ambient at .375"(9.5mm) lead length, P.C. board mounted.

Kingtronics® International Company

Website: www.kingtronics.com Email: info@kingtronics.com Tel: (852) 8106 7033 Fax: (852) 8106 7099

Kingtronics®

HER101 THRU HER108

RATINGS AND CHARACTERISTIC CURVES

FIG.1-TYPICAL FORWARD CURRENT DERATING CURVE

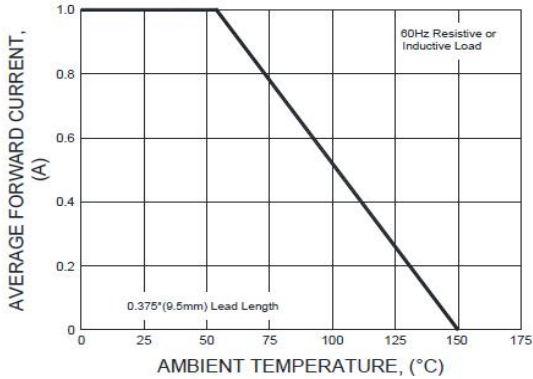


FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

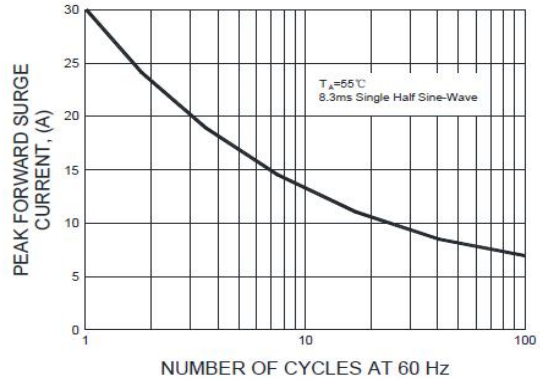


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

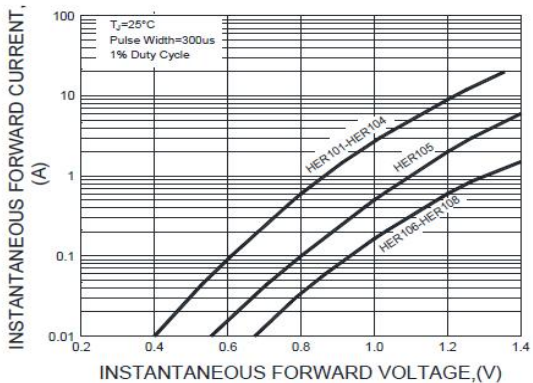


FIG.4-TYPICAL REVERSE CHARACTERISTICS

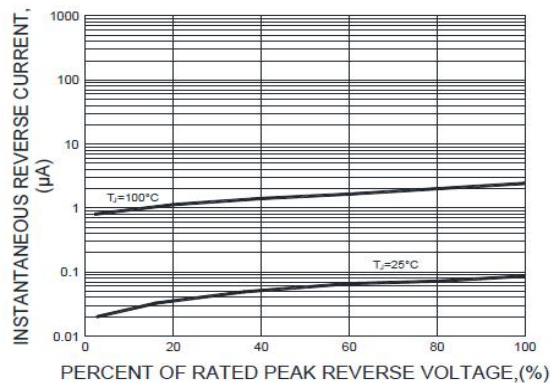


FIG.5-TYPICAL JUNCTION CAPACITANCE


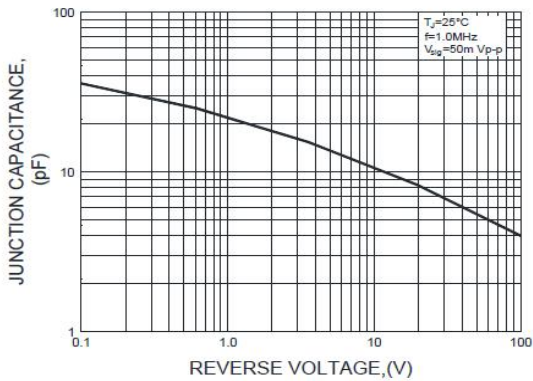


FIG.6-TEST CIRCUIT DIAGRAM AND FORWARD SURGE CURRENT

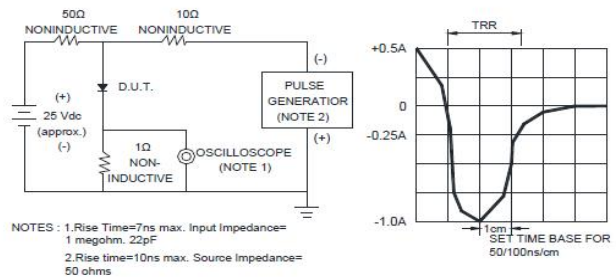

Note: Specifications are subject to change without notice.

Kingtronics® International Company