

HER301 THRU HER308

HIGH EFFICIENCY RECTIFIER

REVERSE VOLTAGE 50 to 1000 Volts FORWARD CURRENT 3.0 Ampere


FEATURES

- ◆ Low power loss, high efficiency
- ◆ Low forward voltage drop
- ◆ Low leakage current
- ◆ High forward surge capability
- ◆ High reliability
- ◆ High temperature soldering guaranteed:
260°C/10 seconds, 0.375" (9.5mm) lead length at
5 lbs(2.3kg) tension

Mechanical Data

- ◆ Case: Transfer molded plastic
- ◆ Epoxy: UL94V-0 rate flame retardant
- ◆ Polarity: Color band denotes cathode end
- ◆ Lead: Plated axial lead, solderable per
MIL-STD-202E method 208°C
- ◆ Mounting position: Any

DO-201AD(DO-27)

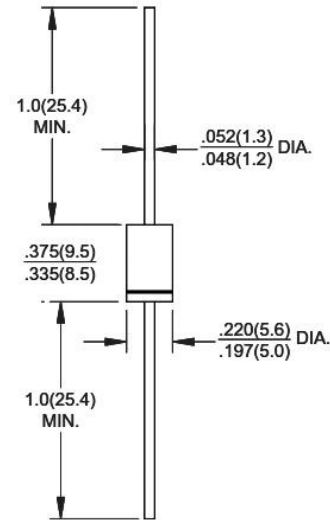

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%

	SYMBOL	HER 301	HER 302	HER 303	HER 304	HER 305	HER 306	HER 307	HER 308	UNIT
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	50	100	200	300	400	600	800	1000	Volts
Maximum RMS Voltage	V_{RMS}	35	70	140	210	280	420	560	700	Volts
Maximum DC Blocking Voltage	V_{DC}	50	100	200	300	400	600	800	1000	Volts
Maximum Average Forward Rectified Current at $T_A=50^\circ\text{C}$	$I_{(AV)}$	3.0								Amps
Peak Forward Surge Current 8.3ms single half sine wave superimposed on rated load (JEDEC method)	I_{FSM}	150								Amps
Maximum Instantaneous Forward Voltage at 3.0A	V_F	1.0		1.3		1.7			Volts	
Maximum DC Reverse Current $T_A=25^\circ\text{C}$ at rated DC Blocking voltage $T_A=100^\circ\text{C}$	I_R	10 150								μA
Maximum Reverse Recovery Time (NOTE1)	T_{RR}	50					75			nS
Typical Junction Capacitance (NOTE 2)	C_J	70					50			pF
Operating and Storage Temperature Range	T_J, T_{STG}	-55 to +150								°C

Note: 1. Reverse Recovery Test Conditions: $I_f=0.5\text{A}, I_r=1.0\text{A}, I_{rr}=0.25\text{A}$.

2. Measured at 1.0MHz and applied reverse voltage of 4.0 Volts.

HER301 THRU HER308

HIGH EFFICIENCY RECTIFIER

REVERSE VOLTAGE 50 to 1000 Volts FORWARD CURRENT 3.0 Ampere

RATING AND CHARACTERISTIC CURVES HER301 THRU HER308

FIG.1-TYPICAL FORWARD CURRENT DERATING CURVE

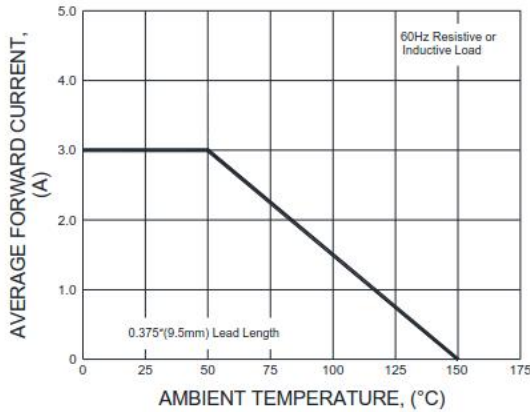


FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

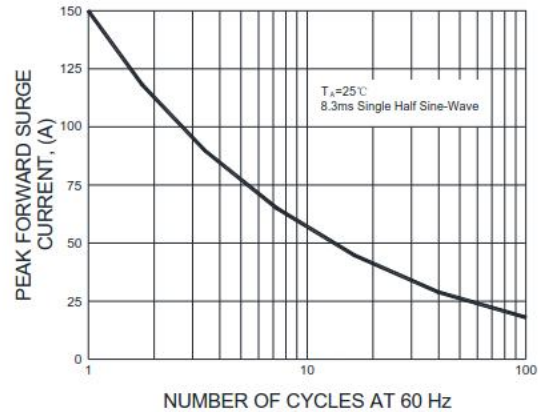


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

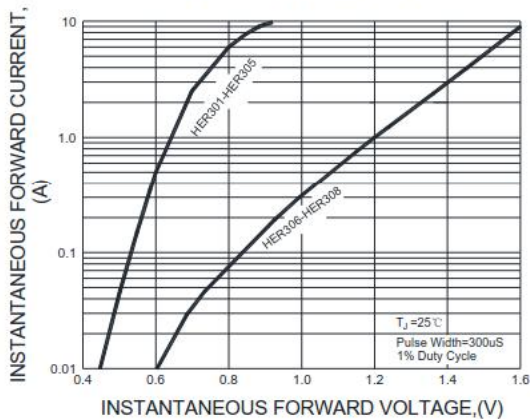


FIG.3-TYPICAL REVERSE CHARACTERISTICS

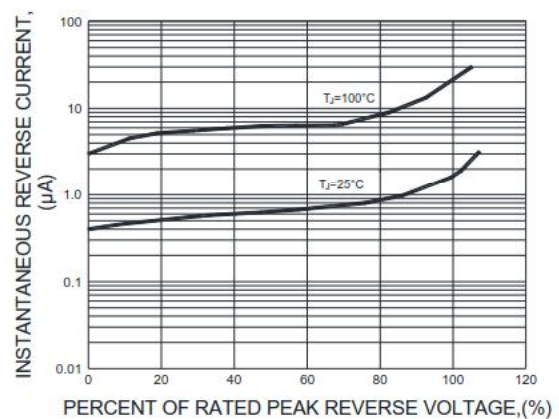


FIG.5-TYPICAL JUNCTION CAPACITANCE


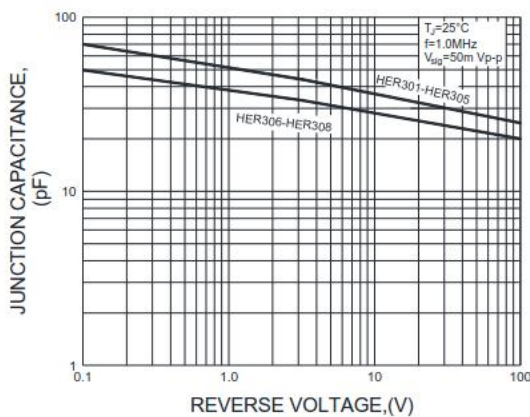


FIG.6-TEST CIRCUIT DIAGRAM AND FORWARD SURGE CURRENT

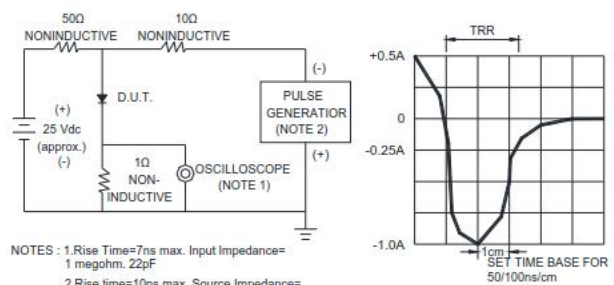

NOTES : 1.Rise Time=7ns max. Input Impedance=1 megohm. 22pF
2.Rise time=10ns max. Source Impedance=50 ohms

Note: Specifications are subject to change without notice. For more detail and update, please visit our website.