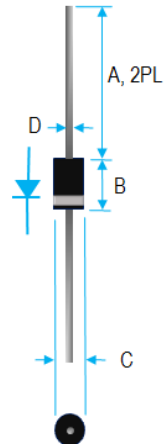


## 3A ULTRA FAST RECOVERY RECTIFIER

 <table border="1" data-bbox="357 399 682 609"> <thead> <tr> <th colspan="3">Value Inch[mm]</th> </tr> <tr> <th>Dim.</th> <th>Min.</th> <th>Max.</th> </tr> </thead> <tbody> <tr> <td>A</td> <td>1.000[25.40]</td> <td>---</td> </tr> <tr> <td>B</td> <td>0.335[8.51]</td> <td>0.375[9.52]</td> </tr> <tr> <td>C</td> <td>0.197[5.00]</td> <td>0.220[5.59]</td> </tr> <tr> <td>D</td> <td>0.048[1.22]</td> <td>0.052[1.32]</td> </tr> </tbody> </table>	Value Inch[mm]			Dim.	Min.	Max.	A	1.000[25.40]	---	B	0.335[8.51]	0.375[9.52]	C	0.197[5.00]	0.220[5.59]	D	0.048[1.22]	0.052[1.32]	<h3>PRODUCT FEATURES</h3> <ol style="list-style-type: none"> <li>1. FLAMMABILITY CLASSIFICATION: 94V-0</li> <li>2. LOW LEAKAGE</li> <li>3. LOW FORWARD VOLTAGE DROP</li> <li>4. HIGH SURGE CURRENT CAPABILITY</li> <li>5. ULTRA FAST SWITCHING</li> <li>6. CASE: MOLDED PLASTIC, DO-201AD</li> <li>7. POLARITY: INDICATED BY CATHODE BAND</li> <li>8. WEIGHT: 1.2 GRAMS</li> <li>9. LEADS: SOLDERABILITY PER MIL-STD-202 METHOD 208</li> <li>10. PULLING TEST: 2.3 KG</li> <li>11. RoHS</li> </ol>
Value Inch[mm]																			
Dim.	Min.	Max.																	
A	1.000[25.40]	---																	
B	0.335[8.51]	0.375[9.52]																	
C	0.197[5.00]	0.220[5.59]																	
D	0.048[1.22]	0.052[1.32]																	

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS RATINGS AT 25°C AMBIENT TEMPERATURE UNLESS OTHERWISE SPECIFIED STORAGE AND OPERATING TEMPERATURE RANGE -55°C TO +150°C. SINGLE PHASE, HALF WAVE, 60 HZ, RESISTIVE OR INDUCTIVE LOAD. FOR CAPACITIVE LOAD, DERATE CURRENT BY 20%.

RATINGS	SYMBOL	VALUE	UNITS
MAXIMUM AVERAGE FORWARD RECTIFIED CURRENT 0.375"(9.5mm) LEAD LENGTH @ TA=50°C	$I_o$	3	A
PEAK FWD SURGE CURRENT, 8.3ms HALF SINE-WAVE SUPERIMPOSED ON RATED LOAD	$I_{FSM}$	150	A
TYPICAL THERMAL RESISTANCE (NOTE 2)	$R_{\theta ja}$	20	°C/W
MAXIMUM REVERSE CURRENT @ 25°C	$I_R$	5	uA
MAXIMUM REVERSE CURRENT @ 100°C	$I_R$	100	uA

1.  $C_j$  MEASURED @ 1 MHZ AND APPLIED REVERSE VOLTAGE OF 4.0 VOLTS
2. BOTH LEADS ATTACHED TO HEAT SINK 63.5x63.5x1t(mm) COPPER PLATE @ LEAD LENGTH 5mm
3. REVERSE RECOVERY TEST CONDITIONS:  $I_F=0.5A$ ,  $I_R=1.0A$ ,  $I_{RR}=0.25A$
4. MAXIMUM FORWARD VOLTAGE @  $I_o$  DC

PART NUMBER	MAX RECURRENT PEAK REV VOLTAGE $V_{RRM}$ (V)	MAX RMS VOLTAGE $V_{RMS}$ (V)	MAX DC BLOCKING VOLTAGE $V_{DC}$ (V)	MAX FWD VOLTAGE $V_F$ (V)	TYPICAL CAP. $C_J$ (PF)	MAX REVERSE RECOVERY TIME $T_{RR}$ (nS)
HER301G	50	35	50	1.0	75	50
HER302G	100	70	100	1.0	75	50
HER303G	200	140	200	1.0	75	50
HER304G	300	210	300	1.3	75	50
HER305G	400	280	400	1.3	75	50
HER306G	600	420	600	1.85	50	75
HER307G	800	560	800	1.85	50	75
HER308G	1000	700	1000	1.85	50	75

## RATING AND CHARACTERISTIC CURVES

FIG. 1 - TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTIC

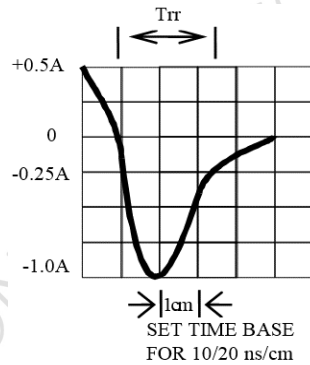
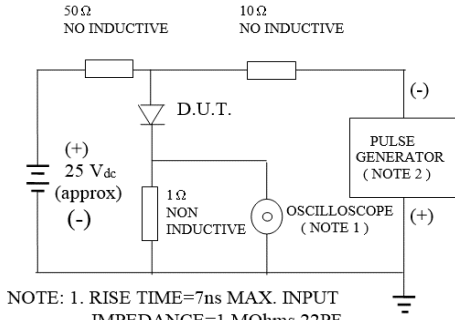


FIG. 2-TYPICAL FORWARD CURRENT DERATING CURVE

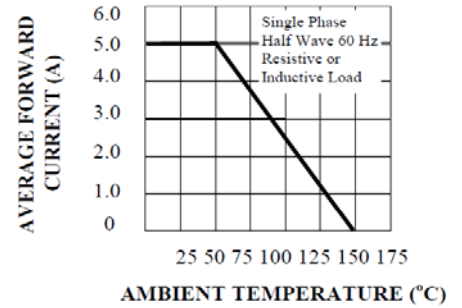


FIG. 3-TYPICAL REVERSE CHARACTERISTICS

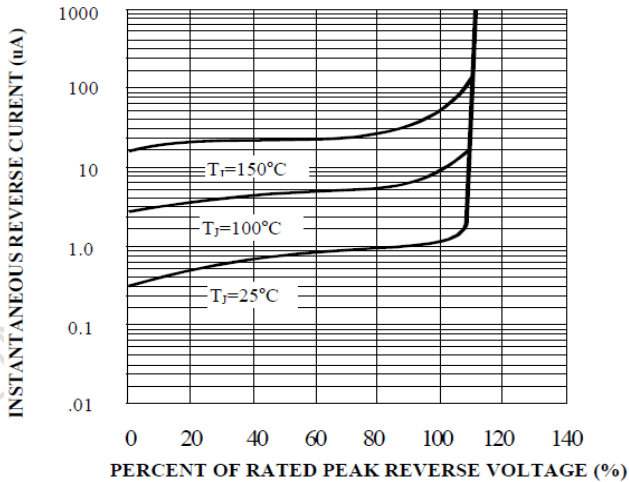


FIG. 4-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

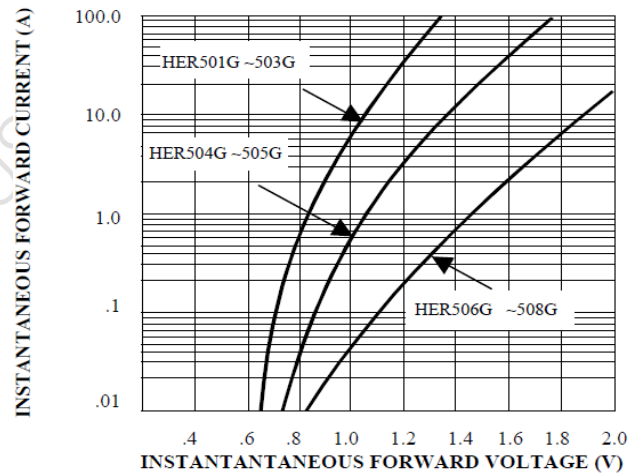


FIG. 5-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

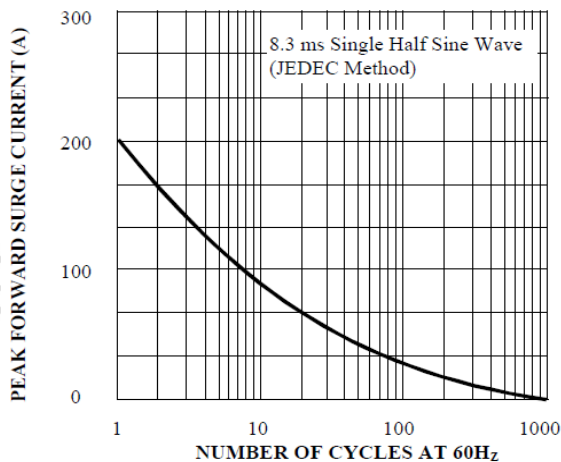


FIG. 6-TYPICAL JUNCTION CAPACITANCE

