



YENYO

# HFR20A06P

Glass Passivated Hyperfast Recovery Rectifier

## Features


- ★ Fast switching for high efficiency
- ★ Low noise
- ★ Low reverse leakage current
- ★ High voltage super FRD
- ★ PFC application

## Mechanical Data

- ★ Case: Molded plastic TO-3P
- ★ Epoxy: UL 94V-0 rate flame retardant ,
- ★ Terminals: Solderable per MIL-STD-202 method 208
- ★ Mounting position: Any
- ★ Weight: 6.2 grams

**Voltage Range 600 V  
Current 20.0 Ampere**

### TO-3P

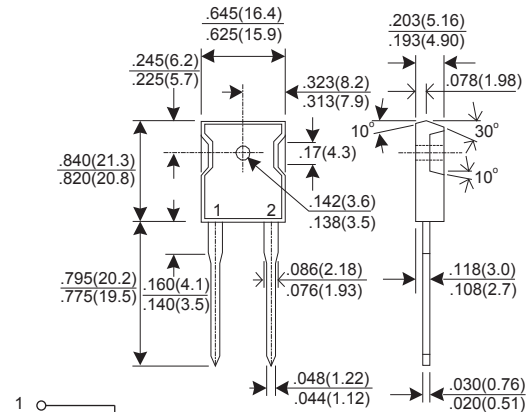

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

CHARACTERISTIC	SYMBOL	HFR20A06P			UNIT
		Min.	Typ.	Max.	
Recurrent Peak Reverse Voltage	VRRM	-	-	600	V
RMS Voltage	VRMS	-	-	420	V
DC Blocking Voltage	VDC	-	-	600	V
Average Forward Rectified Current Tc=140°C	IF(AV)	-	-	20.0	A
Peak Forward Surge Current, 8.3ms single Half sine-wave superimposed on rated load (JEDEC method)	IFSM	-	-	250	A
Instantaneous Forward Voltage @20A(25°C) @20A(150°C)	VF	-	-	2.4 2.0	V
DC Reverse Current @TJ=25°C At Rated DC Blocking Voltage @TJ=150°C	IR	-	-	20 500	uA
Maximum Reverse Recovery Time (Note 1)	Trr	-	-	30	nS
Typical junction Capacitance (Note 2)	CJ	-	10	-	pF
Typical Thermal Resistance (Note 3)	RθJC	-	-	2.6	°CW
Operating Junction and Storage Temperature Range	TJ, TSTG	-65	-	175	°C

NOTES : (1) Reverse recovery test conditions IF = 0.5A, IR = 1.0A, Irr = 0.25A.  
(2) Junction Capacitance test conditions : VR = 10V, IF = 0A.  
(3) Thermal Resistance junction to case.

# RATINGS AND CHARACTERISTIC CURVES HFR20A06P

FIG.1 - FORWARD CURRENT DERATING CURVE

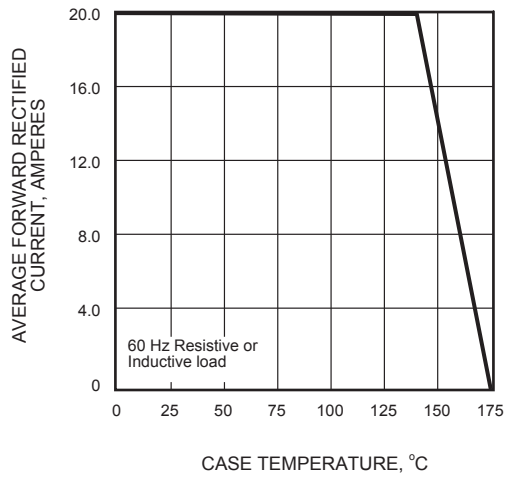


FIG.2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

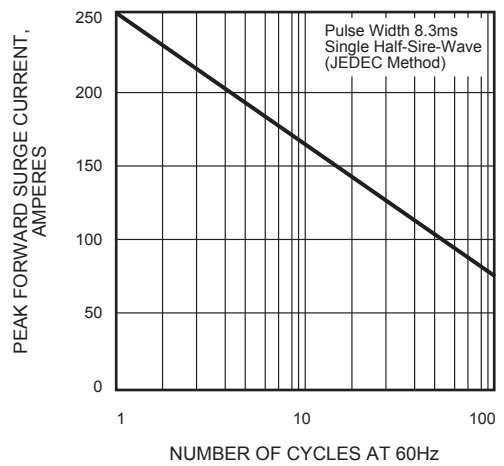


FIG.3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

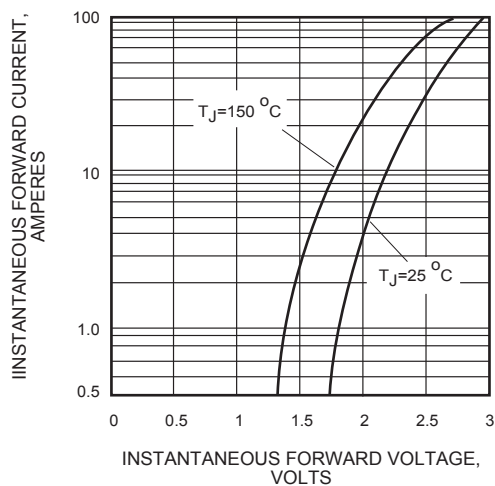


FIG.4 - TYPICAL REVERSE CHARACTERISTICS

