


## HFS8N65U 650V N-Channel MOSFET

### FEATURES

- Originative New Design
- Superior Avalanche Rugged Technology
- Robust Gate Oxide Technology
- Very Low Intrinsic Capacitances
- Excellent Switching Characteristics
- Unrivalled Gate Charge : 22.0 nC (Typ.)
- Extended Safe Operating Area
- Lower  $R_{DS(ON)}$  : 1.16 Ω (Typ.) @ $V_{GS}=10V$
- 100% Avalanche Tested

$BV_{DSS} = 650\text{ V}$   
 $R_{DS(\text{on}) \text{ typ}} = 1.16\text{ }\Omega$   
 $I_D = 7.5\text{ A}$



### Absolute Maximum Ratings $T_C=25^\circ\text{C}$ unless otherwise specified

Symbol	Parameter	Value	Units
$V_{DSS}$	Drain-Source Voltage	650	V
$I_D$	Drain Current – Continuous ( $T_C = 25^\circ\text{C}$ )	7.5 *	A
	Drain Current – Continuous ( $T_C = 100^\circ\text{C}$ )	4.7 *	A
$I_{DM}$	Drain Current – Pulsed (Note 1)	30 *	A
$V_{GS}$	Gate-Source Voltage	$\pm 30$	V
$E_{AS}$	Single Pulsed Avalanche Energy (Note 2)	280	mJ
$I_{AR}$	Avalanche Current (Note 1)	7.5	A
$E_{AR}$	Repetitive Avalanche Energy (Note 1)	4.8	mJ
$dv/dt$	Peak Diode Recovery $dv/dt$ (Note 3)	4.5	V/ns
$P_D$	Power Dissipation ( $T_C = 25^\circ\text{C}$ )	48	W
	- Derate above $25^\circ\text{C}$	0.38	W/ $^\circ\text{C}$
$T_J, T_{STG}$	Operating and Storage Temperature Range	-55 to +150	$^\circ\text{C}$
$T_L$	Maximum lead temperature for soldering purposes, 1/8" from case for 5 seconds	300	$^\circ\text{C}$

\* Drain current limited by maximum junction temperature

### Thermal Resistance Characteristics

Symbol	Parameter	Typ.	Max.	Units
$R_{\theta JC}$	Junction-to-Case	--	2.6	$^\circ\text{C}/\text{W}$
$R_{\theta JA}$	Junction-to-Ambient	--	62.5	

## Package Marking and Ordering Information

Device Marking	Week Marking	Package	Packing	Quantity	RoHS Status
HFS8N65U	YWWX	TO-220F(A)	Tube	50	Pb Free
HFS8N65US	YWWX	TO-220F(B)	Tube	50	Pb Free
HFS8N65U	YWWXg	TO-220F(A)	Tube	50	Halogen Free
HFS8N65US	YWWXg	TO-220F(B)	Tube	50	Halogen Free

\* TO-220F(A) : Dual Gauge, TO-220F(B) : Single Gauge


## Electrical Characteristics $T_C=25^\circ\text{C}$ unless otherwise specified

Symbol	Parameter	Test Conditions	Min	Typ	Max	Units
<b>On Characteristics</b>						
$V_{GS}$	Gate Threshold Voltage	$V_{DS} = V_{GS}$ , $I_D = 250 \mu\text{A}$	2.5	--	4.5	V
$R_{DS(\text{ON})}$	Static Drain-Source On-Resistance	$V_{GS} = 10 \text{ V}$ , $I_D = 3.75 \text{ A}$	--	1.16	1.4	$\Omega$
<b>Off Characteristics</b>						
$BV_{DSS}$	Drain-Source Breakdown Voltage	$V_{GS} = 0 \text{ V}$ , $I_D = 250 \mu\text{A}$	650	--	--	V
$\Delta BV_{DSS} / \Delta T_J$	Breakdown Voltage Temperature Coefficient	$I_D = 250 \mu\text{A}$ , Referenced to $25^\circ\text{C}$	--	0.6	--	$\text{V}/^\circ\text{C}$
$I_{DSS}$	Zero Gate Voltage Drain Current	$V_{DS} = 650 \text{ V}$ , $V_{GS} = 0 \text{ V}$	--	--	1	$\mu\text{A}$
		$V_{DS} = 520 \text{ V}$ , $T_C = 125^\circ\text{C}$	--	--	10	$\mu\text{A}$
$I_{GSS}$	Gate-Body Leakage Current	$V_{GS} = \pm 30 \text{ V}$ , $V_{DS} = 0 \text{ V}$	--	--	$\pm 100$	nA
<b>Dynamic Characteristics</b>						
$C_{iss}$	Input Capacitance	$V_{DS} = 25 \text{ V}$ , $V_{GS} = 0 \text{ V}$ , $f = 1.0 \text{ MHz}$	--	1200	1560	pF
$C_{oss}$	Output Capacitance		--	100	130	pF
$C_{rss}$	Reverse Transfer Capacitance		--	11.0	14.5	pF
<b>Switching Characteristics</b>						
$t_{d(on)}$	Turn-On Time	$V_{DS} = 325 \text{ V}$ , $I_D = 7.5 \text{ A}$ , $R_G = 25 \Omega$	--	35	70	ns
$t_r$	Turn-On Rise Time		--	50	100	ns
$t_{d(off)}$	Turn-Off Delay Time		--	120	240	ns
$t_f$	Turn-Off Fall Time		--	50	100	ns
$Q_g$	Total Gate Charge	$V_{DS} = 520 \text{ V}$ , $I_D = 7.5 \text{ A}$ , $V_{GS} = 10 \text{ V}$	--	22.0	29.0	nC
$Q_{qs}$	Gate-Source Charge		--	6.5	--	nC
$Q_{qd}$	Gate-Drain Charge		--	6.5	--	nC
<b>Source-Drain Diode Maximum Ratings and Characteristics</b>						
$I_S$	Continuous Source-Drain Diode Forward Current	$I_S = 7.5 \text{ A}$ , $V_{GS} = 0 \text{ V}$	--	--	7.5	A
$I_{SM}$	Pulsed Source-Drain Diode Forward Current		--	--	30	
$V_{SD}$	Source-Drain Diode Forward Voltage	$I_S = 7.5 \text{ A}$ , $V_{GS} = 0 \text{ V}$	--	--	1.4	V
$trr$	Reverse Recovery Time	$I_S = 7.5 \text{ A}$ , $V_{GS} = 0 \text{ V}$ $dI_F/dt = 100 \text{ A}/\mu\text{s}$	--	350	--	ns
$Qrr$	Reverse Recovery Charge		--	3.3	--	$\mu\text{C}$


### Notes :

- Repetitive Rating : Pulse width limited by maximum junction temperature
- $L=9.0\text{mH}$ ,  $I_{AS}=7.5\text{A}$ ,  $V_{DD}=50\text{V}$ ,  $R_G=25\Omega$ , Starting  $T_J=25^\circ\text{C}$
- $I_{SD}\leq 7.5\text{A}$ ,  $dI/dt\leq 200\text{A}/\mu\text{s}$ ,  $V_{DD}\leq BV_{DSS}$ , Starting  $T_J=25^\circ\text{C}$
- Pulse Test : Pulse Width  $\leq 300\mu\text{s}$ , Duty Cycle  $\leq 2\%$
- Essentially Independent of Operating Temperature


## Typical Characteristics

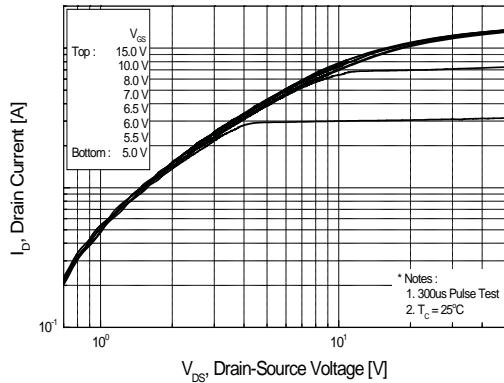


**Figure 1. On Region Characteristics**

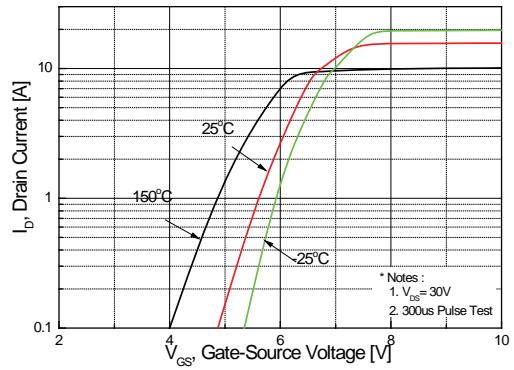


**Figure 2. Transfer Characteristics**

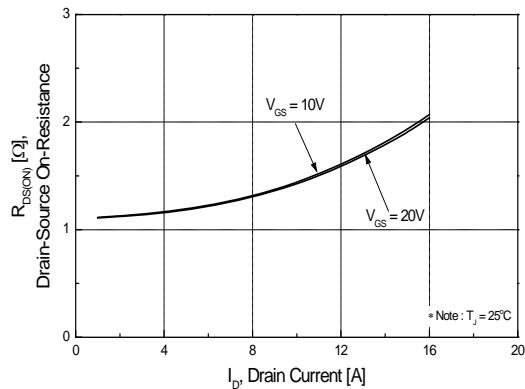


**Figure 3. On Resistance Variation vs. Drain Current and Gate Voltage**

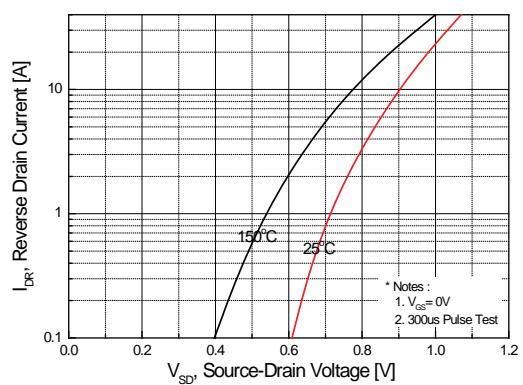

**Figure 4. Body Diode Forward Voltage Variation with Source Current and Temperature**

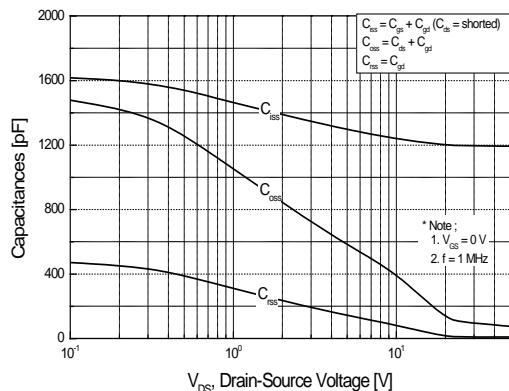


**Figure 5. Capacitance Characteristics**

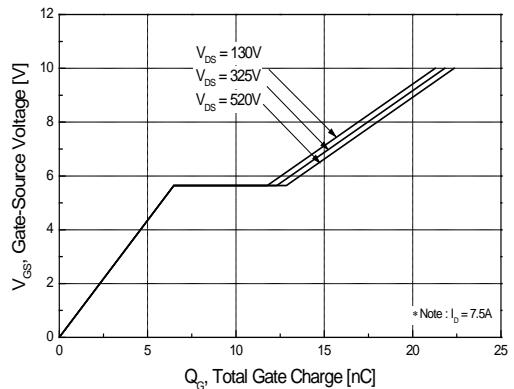


**Figure 6. Gate Charge Characteristics**


## Typical Characteristics (continued)

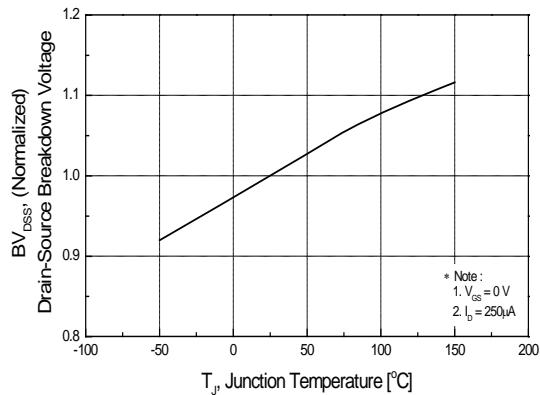


**Figure 7. Breakdown Voltage Variation vs Temperature**

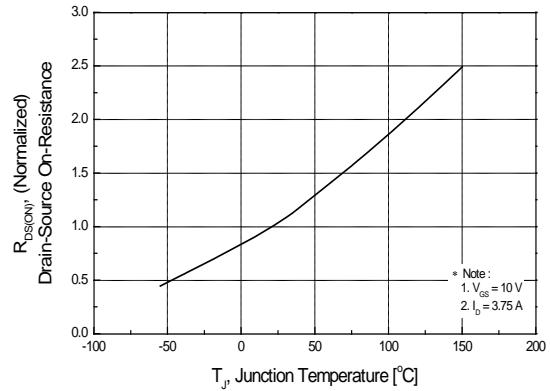


**Figure 8. On-Resistance Variation vs Temperature**

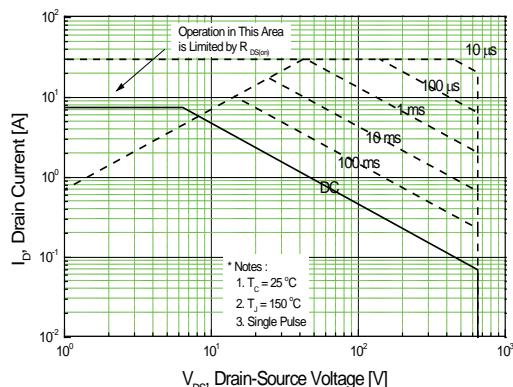

**Figure 9. Maximum Safe Operating Area**

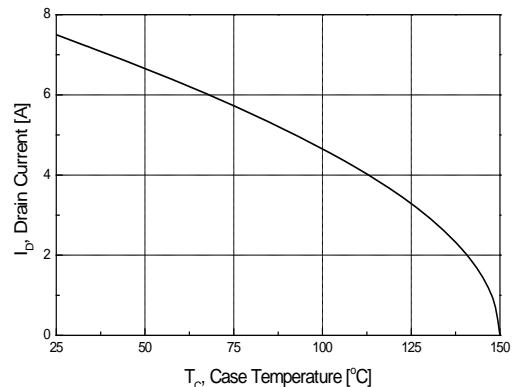

**Figure 10. Maximum Drain Current vs Case Temperature**

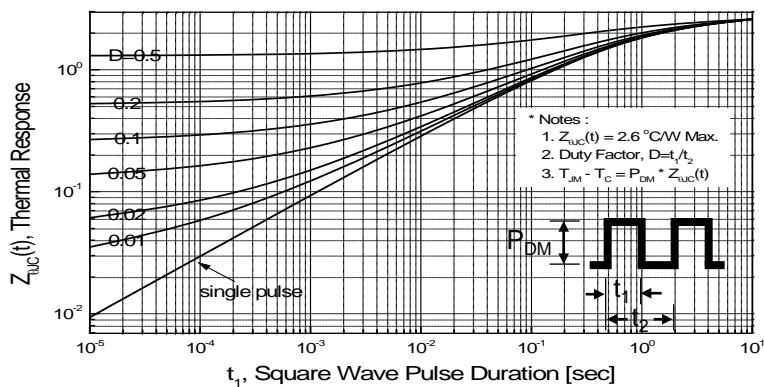

**Figure 11. Transient Thermal Response Curve**








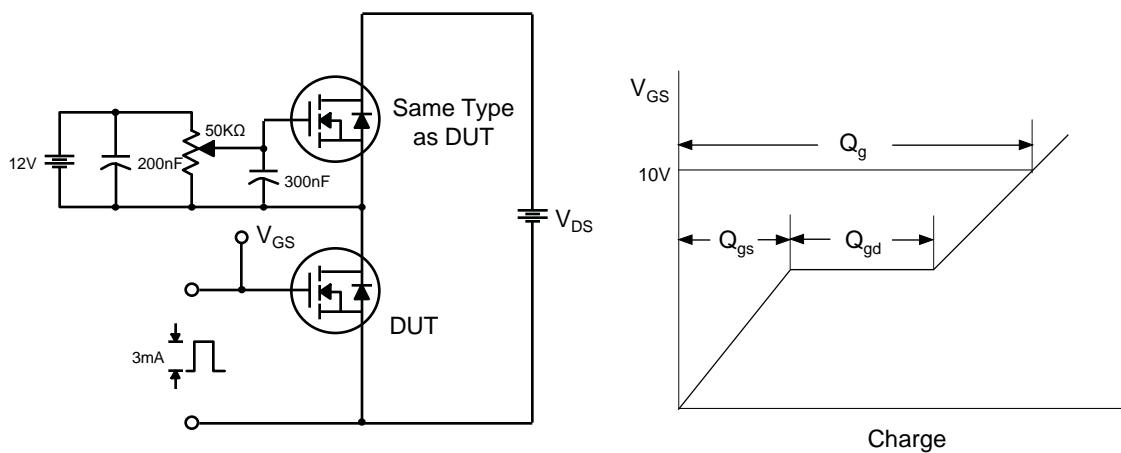
**Fig 12. Gate Charge Test Circuit & Waveform****Fig 13. Resistive Switching Test Circuit & Waveforms****Fig 14. Unclamped Inductive Switching Test Circuit & Waveforms**

Fig 15. Peak Diode Recovery dv/dt Test Circuit &amp; Waveforms

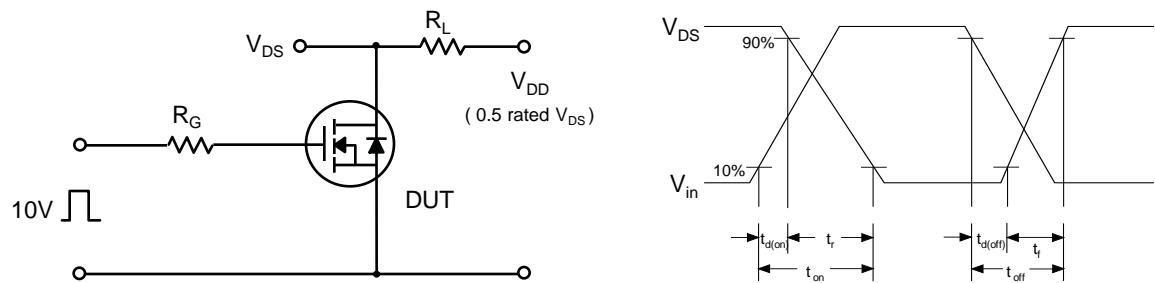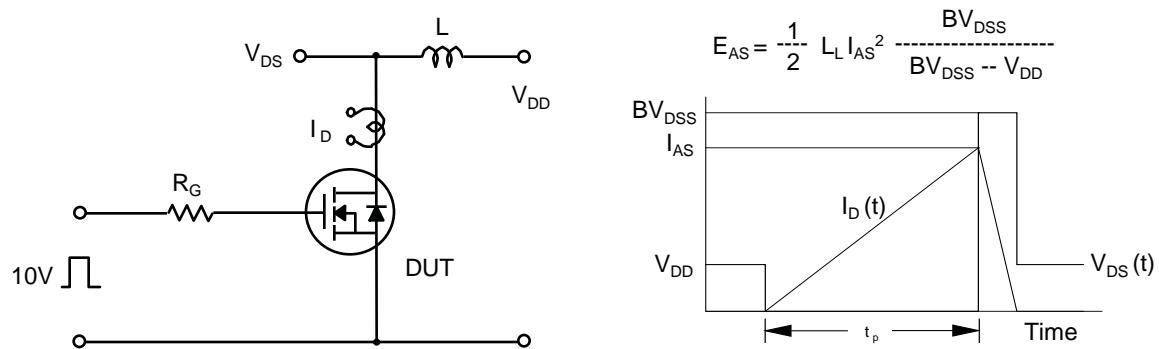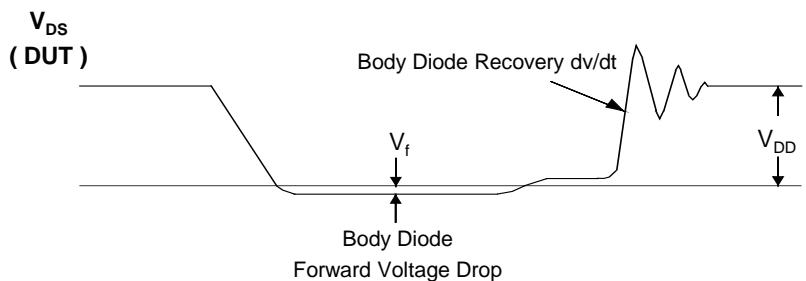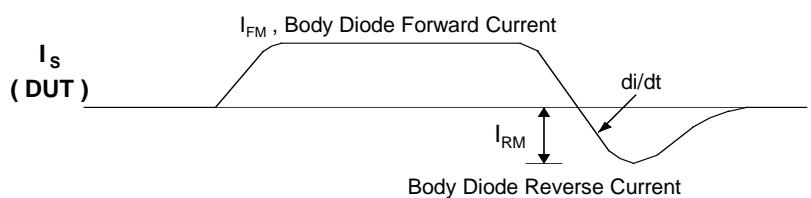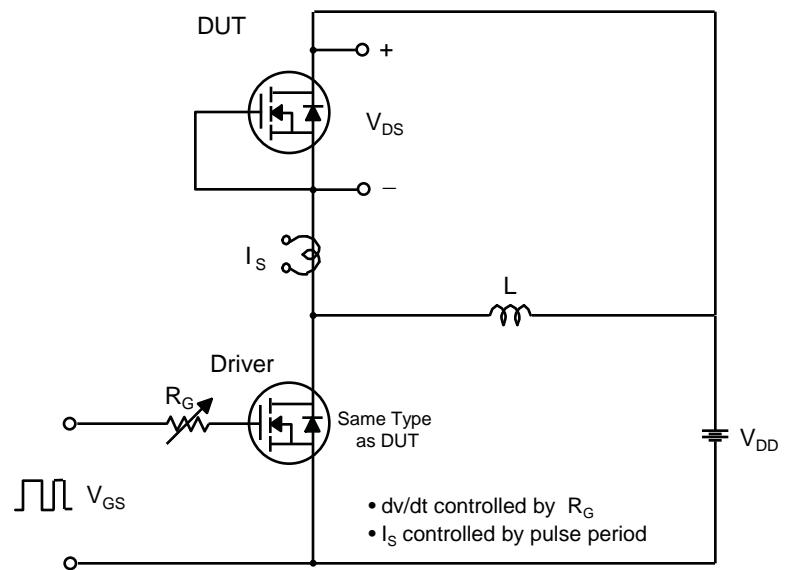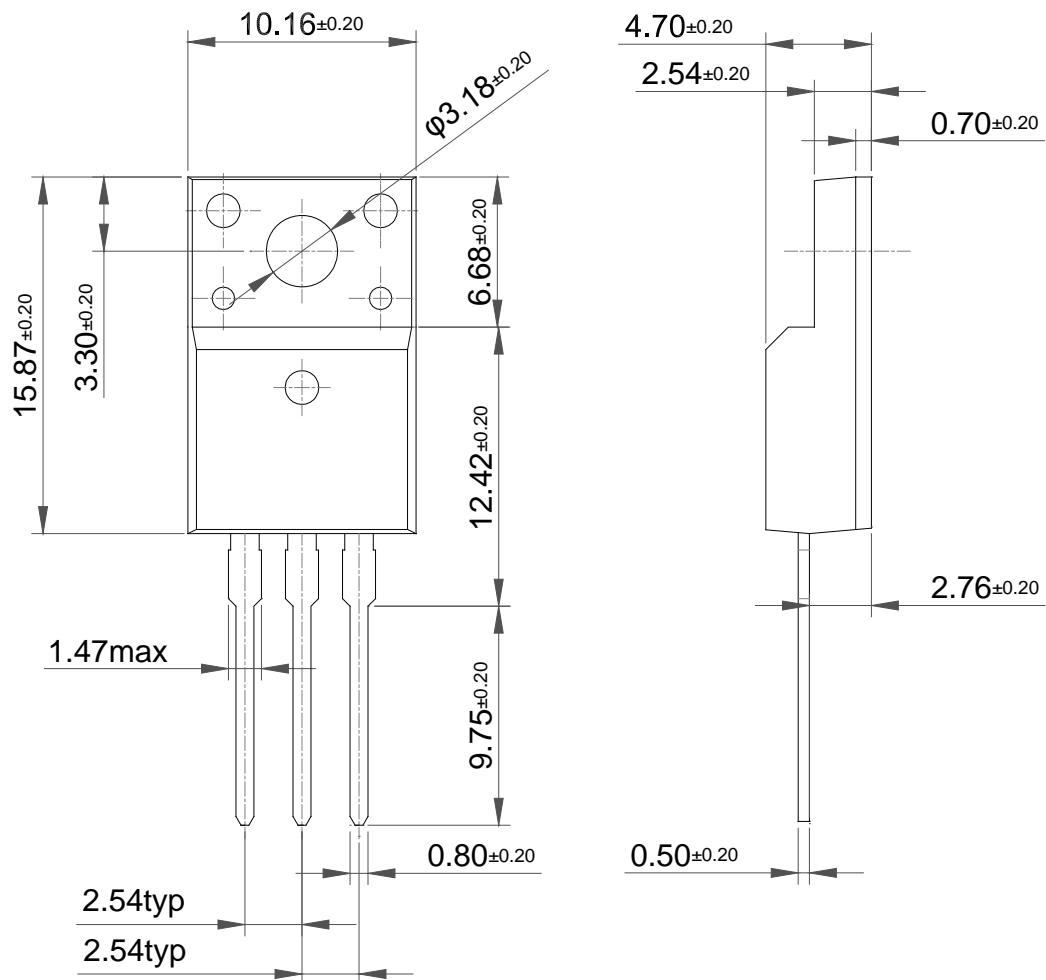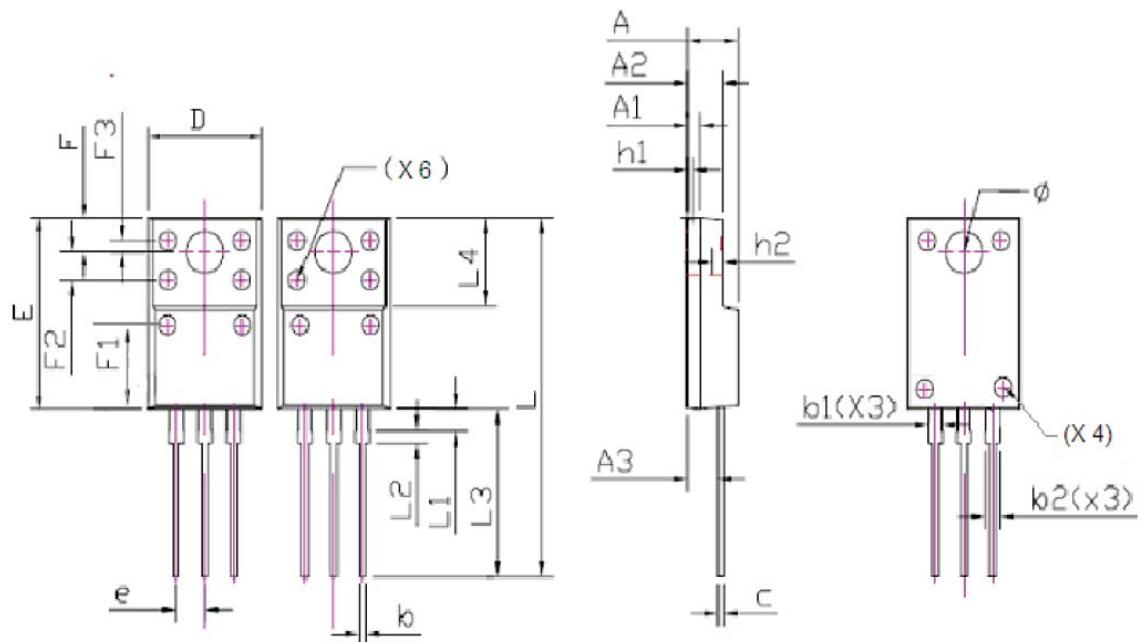

**Package Dimension****TO-220F (A)**

**Package Dimension****TO-220F (B)**

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	4.300	4.700	0.169	0.185
A1	1.300	REF.	0.051	REF.
A2	2.800	3.300	0.110	0.130
A3	2.500	2.900	0.098	0.114
b	0.500	0.750	0.020	0.030
b1	1.150	1.300	0.045	0.051
b2	1.150	1.400	0.045	0.055
c	0.500	0.750	0.020	0.030
D	9.900	10.360	0.390	0.408
E	14.800	15.200	0.583	0.598
e	2.540	TYP.	0.100	TYP.
F	2.700	REF.	0.106	REF.
F1	6.300	REF.	0.248	REF.
F2	2.200	REF.	0.087	REF.
F3	0.900	REF.	0.035	REF.
Φ	3.200	3.500	0.126	0.138
h1	0.500	REF.	0.020	REF.
h2	0.800	REF.	0.031	REF.
L	28.000	29.000	1.102	1.142
L1	1.400	1.800	0.055	0.071
L2	1.200	2.000	0.047	0.079
L3	13.0	13.8	0.512	0.543
L4	7.000	REF.	0.276	REF.