www.DataSheet4U.com

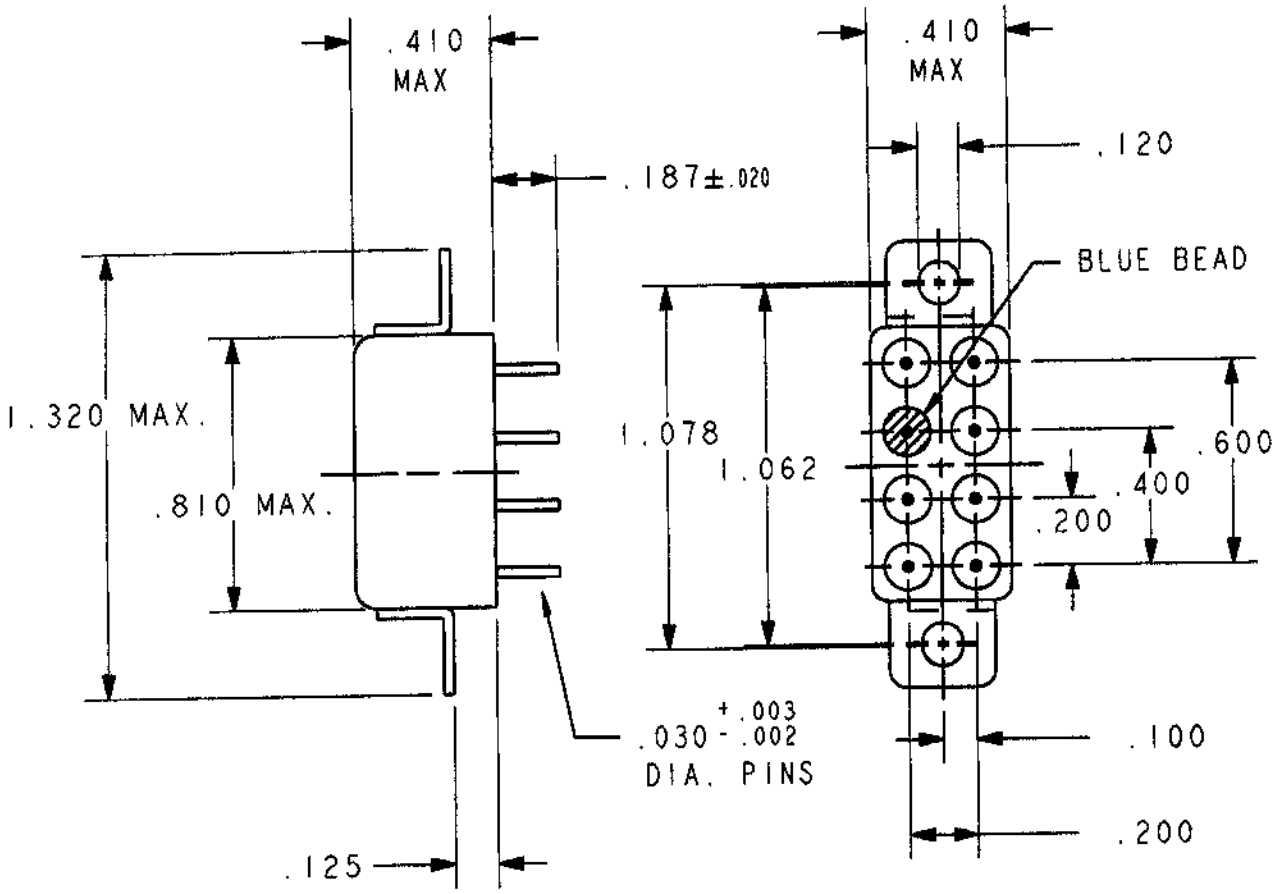

REV. 0
DCO 17157

COIL: @ 25°C

RESISTANCE 700 OHMS ±10%

NOMINAL VOLTAGE 26.5 VDC

MUST OPERATE 13.5 VDC

MUST RELEASE 1.5 VDC MIN.

ENVIRONMENT:

VIBRATION 10 CPS TO 2000 CPS @ 20 g's

SHOCK 100 g's 6 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE & RELEASE 4 MS MAX.
CONTACT BOUNCE 2.0 MS MAX.

CUSTOMER DATA SHEET



TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO 2A
28 VDC RESISTIVE 100,000 OPERATIONS

DR. BSH 07/18/01 | CK. TLG 7-18-01

CII Technologies™
advanced control electronic solutions

CUST. C.I.I.
CUST. NO. STANDARD REV.

"HFW" RELAY

HFW1230K00

F-718 REV. 3

www.DataSheet4U.com