


REV.	CHANGE CONTENT	BY	DATE

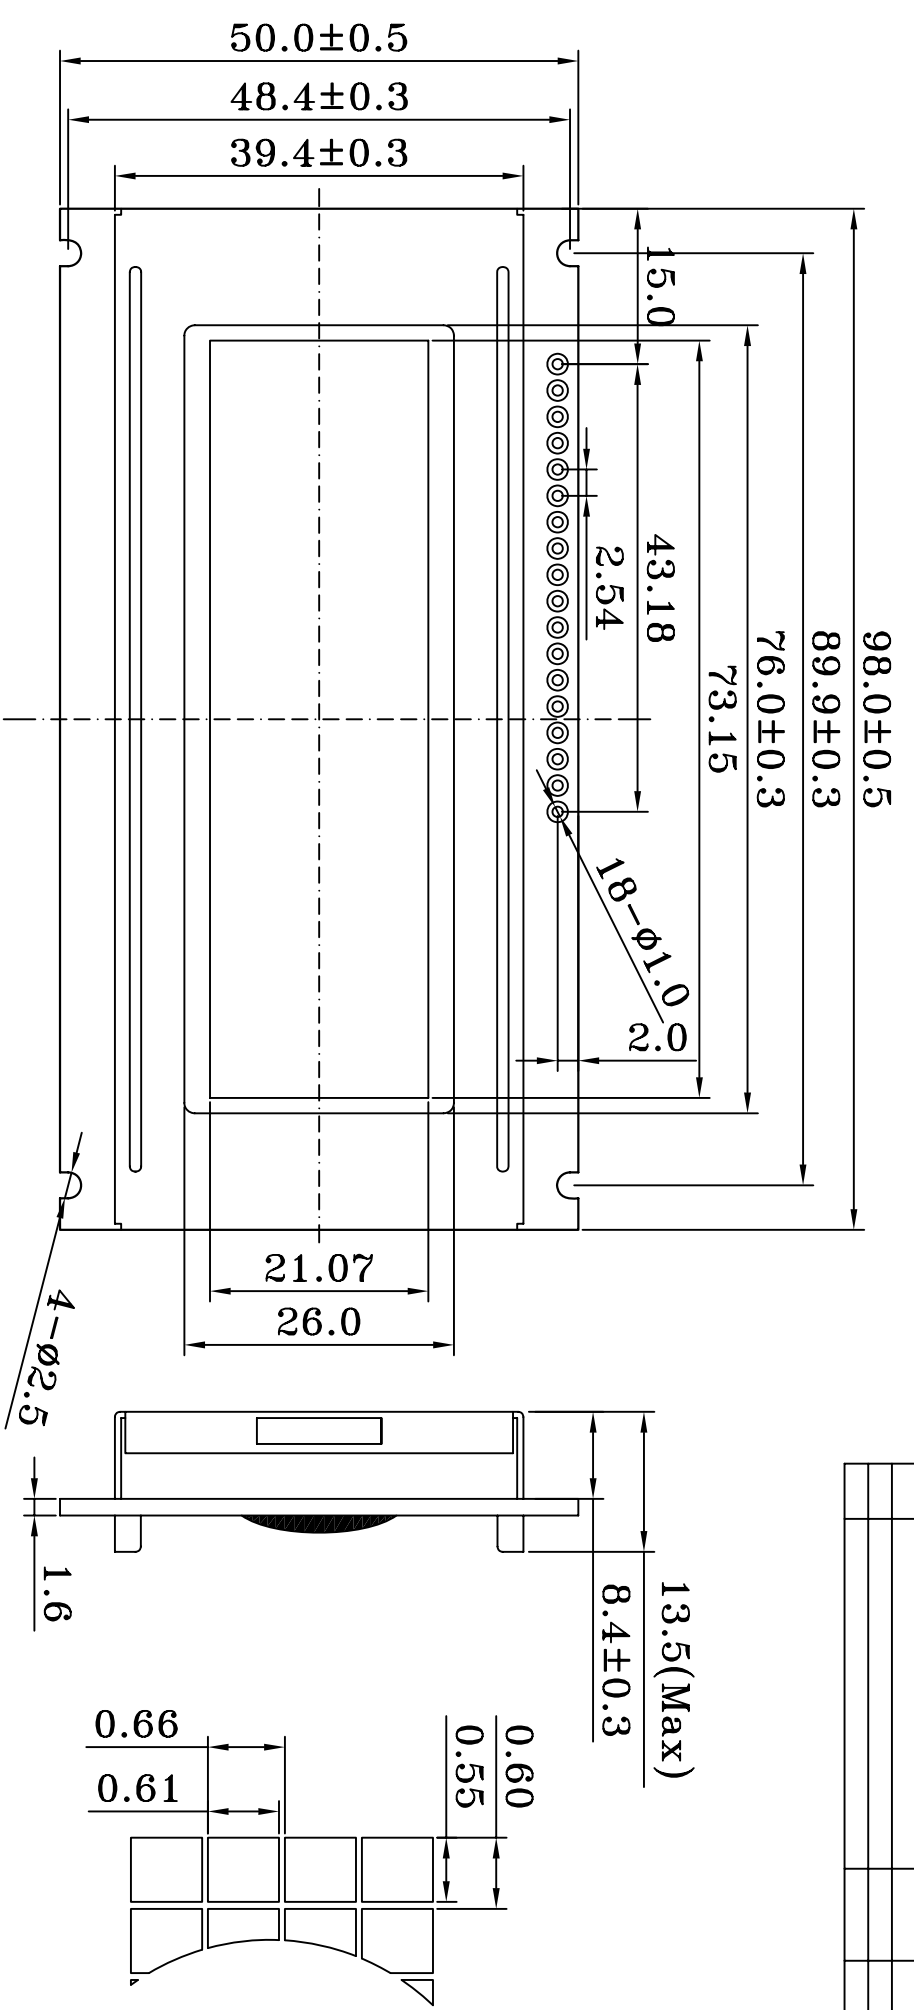

PIN No	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
Symbol	VSS	VDD	VO	A0	R/W	E1	E2	NC	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	LEDA	LEDK

NOTES:

1. DISPLAY TYPE: STN
2. DISPLAY MODE: TRANSPARENT-POSITIVE
3. VIEWING DIRECTION: 6 O'CLOCK
4. VDD: 5.0 V
5. OPERATING TEMP: -20°C TO 70°C
STORAGE TEMP: -30°C TO 80°C
6. DRIVER IC: NJU6450(CDB)
7. DRIVER METHOD: 1/32 DUTY 1/7 BAIS VDP:7.5V
8. BACK LIGHT: LED Y/G, 200mA 4.1V

BLU	GI223201C-L	1																
PCB	HP008A	1																
LCD	GI223201C-LCD	1																
SYMBOL	ITEM OR CODE NO.	QTY	REMARK	SYMBOL	ITEM OR CODE NO.	QTY	REMARK											
TOLERANCE																		
	>0~6 ±0.10																	
	>6~80 ±0.20																	
	>80~240 ±0.30																	
	>240~400 ±0.50																	
	// L ⊙ ±0.10																	

HTDISPLAY CO., LTD.

DRAWING No.: HG1223201C-YF62L-VA
DRAWING TITLE: LCD MODULE

DESIGN	LI JINTANG	05.07.13	STANDARD		
CHECKED			TECHNOLOGY		
APPROVED			QA		
REV. :			SCALE :		
PROJECTION:			UNIT :	MM	
			SHEET :	1/1	