

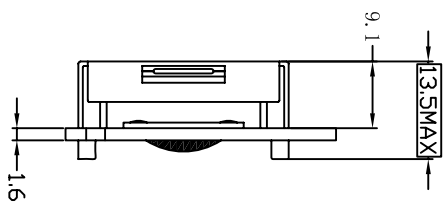


| REV. | CHANGE CONTENT | BY | DATE |
|------|----------------|----|------|
| | | | |
| | | | |
| | | | |

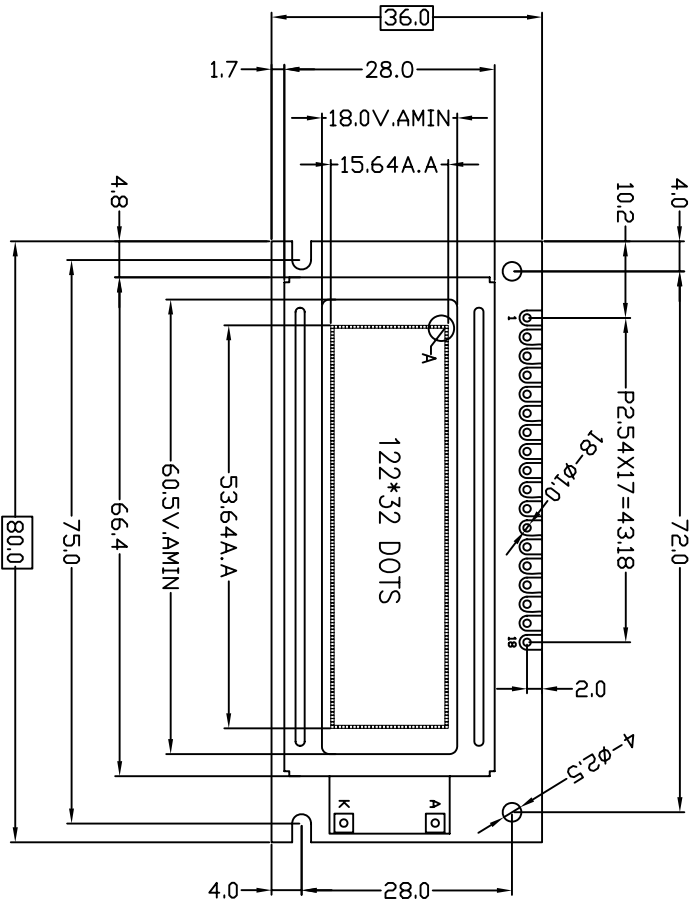

| PIN No | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8-15 | 16 | 17 | 18 |
|--------|-----|-----|----|----|----|----|----|---------|------|------|------|
| Symbol | VSS | VDD | V0 | A0 | E1 | E2 | RW | DB0-DB7 | /RST | LEDA | LEDK |

Note:

1. Display Mode:STN, Y/G, POSITIVE, Transflective
 2. View Direction:6 O'Clock
 3. Driver Method: 1/32 Duty, 1/4Bias
 4. LCD Operating Voltage: 5.0V
 5. Operating Temperature: -20° C- 70° C
 6. Storage Temperature: -30° C- 80° C
 7. Controller: PT6520 COB
 8. LED: COLOR:YELLOW-GREEN 底光5.0V
- THE DIMENSION IN FRAME IS CRITICAL TO QUALITY

| LED | G1223204C-L | 1 | | | | | | | | | |
|-----------|------------------|----|--------|--------|------------------|----|--------|--|--|--|--|
| TK | G1223204C-K | 1 | | | | | | | | | |
| LCD | G1223204C-LCD-VB | 1 | | | | | | | | | |
| PCB | G1223204C-B | 1 | | | | | | | | | |
| SYMBOL | ITEM OR CODE NO. | QT | REMARK | SYMBOL | ITEM OR CODE NO. | QT | REMARK | | | | |
| TOLERANCE | | | | | | | | | | | |
| >0~6 | ±0.10 | | | | | | | | | | |
| >6~80 | ±0.20 | | | | | | | | | | |
| >80~240 | ±0.30 | | | | | | | | | | |
| >240~400 | ±0.50 | | | | | | | | | | |
| // 1.0 | ±0.10 | | | | | | | | | | |



HTDISPLAY CO., LTD.

DRAWING No.: HG1223204C-YF62L-VB
DRAWING TITLE: LCD MODULE
FILE NO. :
REV. : A
SCALE : -
PROJECTION:
UNIT : MM
SHEET : 1/1