

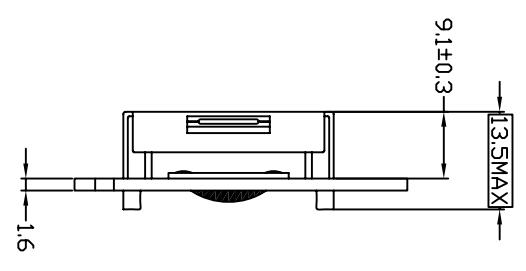


REV.	CHANGE CONTENT	BY	DATE

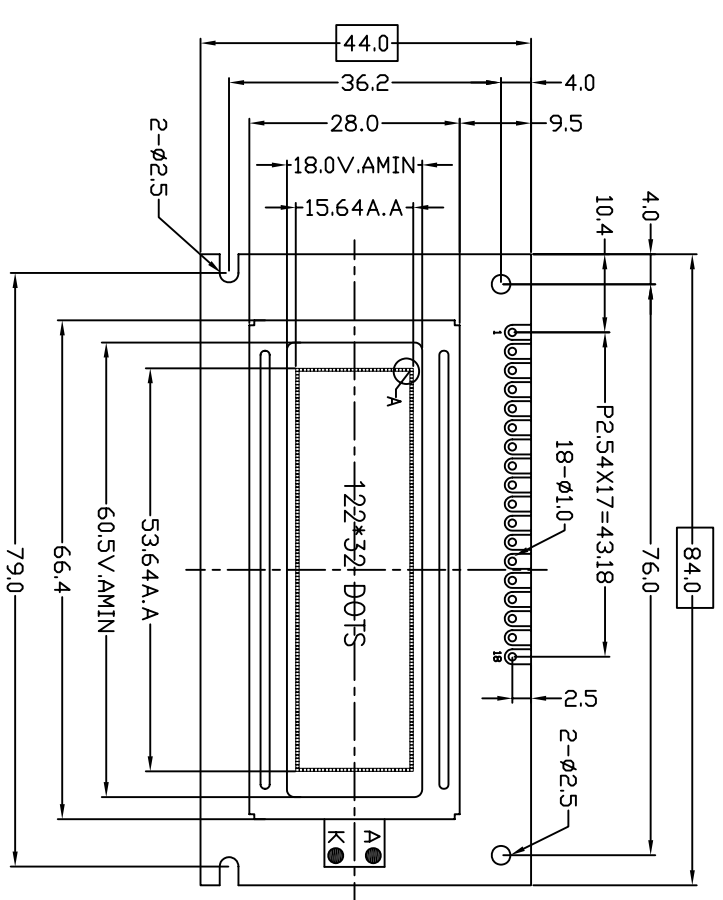

PIN No	1	2	3	4	5	6	7	8	9-16	17	18
Symbol	VDD	VSS	V0	/RST	E1	E2	R/W	A0	DB0-DB7	LEDA	LEDK

Note:

1. Display Mode:STN, Y/G, POSITIVE, Transflective
2. View Direction:6 0°Clock
3. Driver Method: 1/32 Duty, 1/5Bias
4. VDD: 5.0V
5. Operating Temperature: -30° C T0 +70° C
6. Storage Temperature: -40° C T0 +80° C
7. Controller: NJU6450 OR EQU.
8. LED: COLOR:YELLOW-GREEN 底光:5.0V
9. ANTI-UV

**HTDISPLAY CO., LTD.**



TOLERANCE	HTDISPLAY		ZOUYS		STANDARD		DRAWING No. :HGT223205C-YF63L-VB	
>0~6 ±0.10	DESIGN	06.06.19	CHECKED	TECHNOLOGY	REV. : A	SCALE : -	FILE NO. : 8	DRAWING TITLE:LCD MODULE
>6~80 ±0.20	ZOUYS		APPROVED	Q. A	PROJECTION:	UNIT : MM		
>80~240 ±0.30					Φ	SHEET : 1/1		
>240~400 ±0.50								
// ±0.10								