
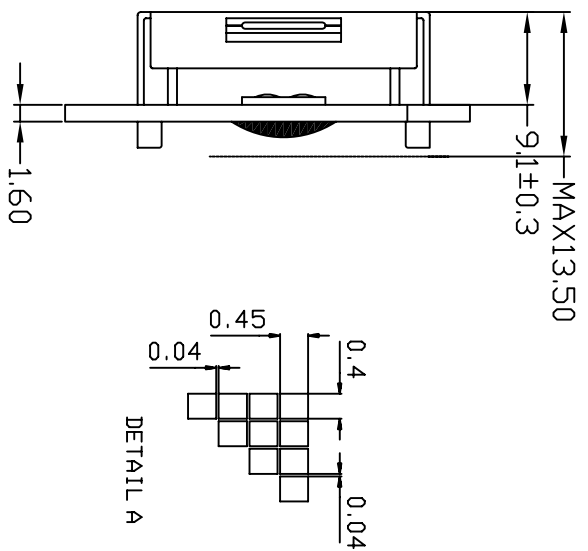


REV.	CHANGE CONTENT	BY	DATE

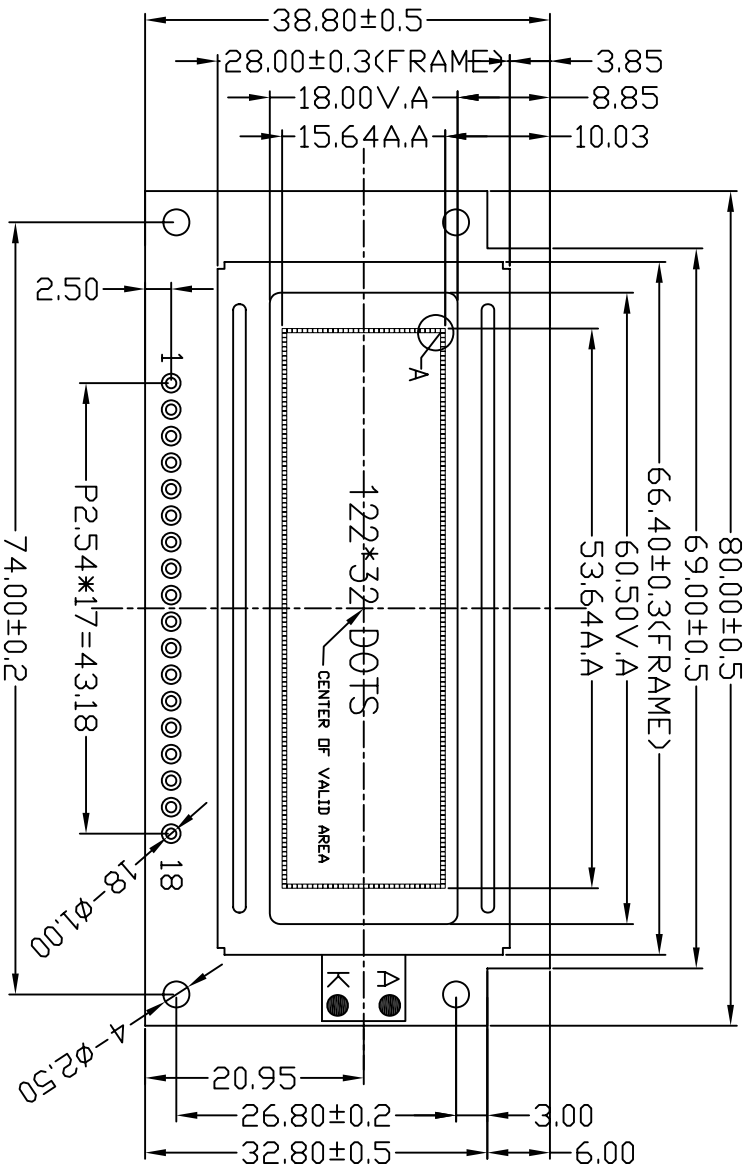

Note:

1. Display Mode: STN, Y/G, POSITIVE, Transflective
2. View Direction: 6 O'Clock
3. Driver Method: 1/32 Duty, 1/6Bias
4. Logic Voltage Supply: +5.0V
5. Operating Temperature: -30° C- 70° C
6. Storage Temperature: -35° C- 80° C
7. Controller: PT6520 COB
8. LFD: COLOR: YELLOW-GREEN /底光5.0V, 90mA

PIN No	1	2	3	4	5	6
Symbol	VSS	VDD	V0	A0	CS2	CS1

PIN No	7	8-15	16	17	18
Symbol	R/W	DB0-DB7	/RES	LEDA	LEDK

HTDISPLAY CO., LTD.

DRAWING No.: HGT223218C-YF63L-VA
DRAWING TITLE: LCM
FILE NO.:

TOLERANCE	HTDISPLAY	ZOUYS	06.12.01	STANDARD	REV. : A	SCALE : -
>0~6 ±0.10	APPROVED	CHECKED	Q. A	TECHNOLOGY	UNIT : MM	SHEET : 1/1
>6~80 ±0.20		DESIGN				
>80~240 ±0.30						
>240~400 ±0.50						
// 1.0 ±0.10						