


REV.	CHANGE CONTENT	BY	DATE

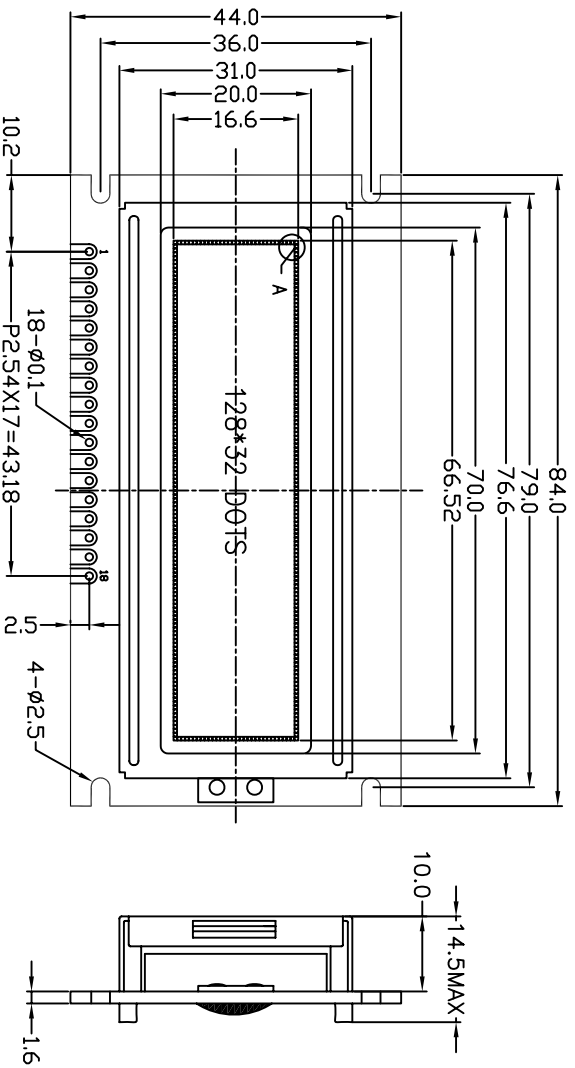

PIN No	1	2	3	4	5	6	7-14	15	16	17	18
Symbol	VSS	VDD	NC	RS	R/W	E	DB0-DB7	PSB	/RST	LEDK	LEDA

Note:

1. Display Mode:STN, Y/G, POSITIVE, Transflective
2. View Direction:6 O'Clock
3. Driver Method: 1/32 Duty, 1/6Bias
4. LCD Operating Voltage: 6.5V
5. Operating Temperature: -20° C- 70° C
6. Storage Temperature: -30° C- 80° C
7. Controller: ST7920 COB
8. LED: COLOR:YELLOW-GREEN 底光5.0V

LED	G1283201C-L	1									
TK	G1283201C-K	1									
LCD	G1283201C-LCD	1	JY00170B								
PCB	HP021A	1									
SYMBOL	ITEM OR CODE NO.	QT	REMARK	SYMBOL	ITEM OR CODE NO.	QT	REMARK				
TOLERANCE											
>0~6	±0.10										
>6~80	±0.20										
>80~240	±0.30	DESIGN	L2M	06.08.04	STANDARD						
>240~400	±0.50	CHECKED			TECHNOLOGY						
// 1.0	±0.10	APPROVED			Q. A						



HTDISPLAY CO., LTD.

DRAWING No.: H61283201C-YF62L-VA
DRAWING TITLE: LCD MODULE
FILE NO.: 8

REV.: A
PROJECTION:
SCALE: -
UNIT: MM
SHEET: 1/1