



128X64 DOTS

FRONT

REAR

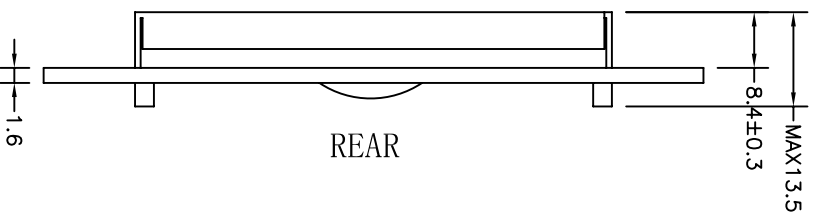

PINS ASSIGNMENTS

PIN	SYMBOL
1	VSS
2	VDD
3	NC
4	RS
5	R/W
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	PSB
16	NC
17	/RST
18	NC
19	LEDA
20	LEDK

- NOTES:
1. DISPLAY TYPE: STN-Y/G
 2. DISPLAY MODE: TRANSPARENT POSITIVE
 3. VIEWING DIRECTION: 6 O'CLOCK
 4. VDD: 5.0 V
 5. OPERATING TEMP: -20°C TO 70°C
STORAGE TEMP: -30°C TO 80°C
 6. DRIVER IC: ST7920(COB)
 7. DRIVER METHOD: 1/32 DUTY 1/6 BANS
 8. BACK LIGHT: LED WHITE, 40mA, 5.0V

HTDISPLAY CO., LTD.



TOLERANCE	HTDISPLAY		HTDISPLAY CO., LTD.	DRAWING No.: H61286401C-YF62L-VA
>0~6 ±0.10	DESIGN	LI JINTANG	05.07.05	STANDARD
>6~80 ±0.20	CHECKED			TECHNOLOGY
>80~240 ±0.30	APPROVED			Q.A
>240~400 ±0.50				
// L ⊙ F0.10				
REV. : A	SCALE : -			
PROJECTION:	UNIT : MM			
	SHEET : 1/1			
FILE NO. : 8				
DRAWING TITLE: LCD MODULE				

REV.	CHANGE CONTENT	BY	DATE